

# CONTENTS NEW PRODUCTS

Trend prides itself on continually developing new and innovative time saving products for tradespeople.

Our New Products pages are full of exciting new lines in a range of categories including Storage, PPE, Cutters & Jigs.



### **ROUTER CUTTERS & SETS**

**CUTTER SETS** 

PROFESSIONAL CUTTERS 9-69
PROFESSIONAL HSS CUTTERS 70-71
CRAFTPRO CUTTERS 72-98



### JIGSAW, OSCILLATING, PLANER & SAWBLADES

99-105

JIGSAW BLADES 108
OSCILLATING BLADES 109
PLANER BLADES 110
PROFESSIONAL SAWBLADES 111-113
CRAFTPRO SAWBLADES 114-117



### **POWER TOOLS & SAFETY**

POWER TOOLS	119-129
PERSONAL PROTECTION	130-137
ROUTER TABLES	138-140
CNC MACHINES	141-150



### **ROUTING JIGS & ACCESSORIES**

WORKSHOP JIGS	151-157
KITCHEN FITTING	158-169
DOOR FITTING	170-180
JIG ACCESSORIES	181-197
HAND TOOLS	198



### **WOODWORKING & ACCESSORIES**

DRILLING	199-207
CLAMPING	208-211
MEASURING & MARKING	212-215
SHARPENING	216-223
TORCHES	224-225



### TOOL STORAGE

TOOL BAGS	232-233
COMPACT STORAGE SYSTEM	230-231
PRO STORAGE SYSTEM	228-229

PRODUCT INDEX 254-257



### WEBSITE www.trend-uk.com

TREND SNAPPY QUICK RELEASE

As well as our feature-packed website which will tell you all you need to know about our products and how to use them, we are also active on all major social media platforms.



235-250

FACEBOOK @TrendToolTechnolog

TWITTER



INSTAGRAM @TrendToolTechnolo



LINKEDIN Trend Tool Technology





YOUTUBE /TrendMachinery

WHY NOT SUBSCRIBE & ENSURE THAT YOU GET TO SEE ALL THE LATEST DEVELOPMENTS, HINTS, TIPS & OFFERS.

### CONTACT









### **GENERAL ENQUIRIES**

Telephone: 01923 249911
Fax: 01923 236879
Enquiries email: enquiry@trendm.co.uk
Opening hours: 08.30 - 17.30 Mon to Fri

### **TECHNICAL SUPPORT**

Fax: 01923 228657
Email: technical@trendm.co.uk
Online support: www.trend-uk.com/online
Support hours: 08.45 - 17.30 Mon to Fri



In order to share our expertise, the Trend team attends & runs consumer events all around the UK.
See the show guide on our website for details of this year's shows & exhibitions.

### **AVAILABLE FROM OVER 350 ROUTING CENTRES & STOCKISTS IN UK**



For details of your nearest dealer, visit www.trend-uk.com/dealer

All prices are exclusive of VAT. Prices are effective from 1st April 2020 until 31st March 2021

# **NEW PRODUCTS**

# RESPIRATORY EQUIPMENT

Whether it's your eyes, face, lungs or head, Trend takes your safety & protection seriously. From daily disposable masks to high-end protective respiratory equipment, Trend has the right mask to suit your needs.



Market Leading Respiratory Protection



Excellent Filtration & Breathability



Maximum Comfort



All Trend masks conform to APF20 standards or above offering maximum protection whilst working with MDF.

NEW pages 130-137

DON'T FORGET TO CHANGE YOUR FILTERS REGULARLY



Lung Disease Protection



Maintain High Breathability



Maintain High Work Rate



AIR STEALTH LITE PRO **Dust Mask** FFP3 R D



AIR STEALTH VIS P3(R) Half Mask Respirator with safety goggles



A2P3-APF20

NEW

AIR MASK PRO Full Face Mask



AIR PRO MAX Battery Powered Respirator TH3P





CONCRETE, WOOD DUST,
PLASTERBOARD DUST & CERAMIC DUST

# **NEW PRODUCTS**





**Certified Dust &** Water Resistant



Maximum Impact Resistance



Durable Polyamide Latches/Connectors

AND THE RESIDENCE OF THE PROPERTY OF THE PROPE



Max. Weight Per Box



<u>Modular</u> & Stackable

### **ORGANISERS**



Impact Resistant
Organisers Lid



Individual Compartments











4 PIECE **PLATFORM SET** 

### NEW

ORGANISERS









pages 230-231





**Modular &** Stackable



Flexible & Compact



Transportable & Manoeuvrable



**Durable Polyamide** Latches

4 PIECE CART SET



ORGANISER MINI



TOTE 200 WITH ORGANISER MINIS



# **NEW PRODUCTS**

# WORKTOP JIGS

New Compact Grade High Pressure Laminate routing jigs for fitting worktops & making user-made table top workbenches.



**MULTI-FUNCTIONAL** TABLE TOP JIG



**WORKTOP JIG 650MM** 



NEW

MULTI-MATERIAL WORKTOP JIG 700MM





Set-Up & Cut



Multiple Worktop **Applications** 



**Compact Grade High** Pressure Laminate

NEW

pages 158-161

# POCKET HOLE JIGS

Multi-function jigs for new work, repair work & use on different material thicknesses.



Multiple Applications •



Fast Set-Up



Strong Joints



SINGLE POCKET

NEW

PRO POCKET HOLE JIG

NEW

pages 201-207



3-IN-1 POCKET

# FASTTRACK SHARPENER MK2

To sharpen, hone & finish chisels & plane irons between 3mm & 65mm wide.



4 Angle Sharpening



**High Performance Diamond Sharpening** 



page 220

# T7 ROUTER

A powerful 1/2" router suitable for a wide range of tasks including cutting worktops.



Powerful 2100w Motor



Variable Speed Control



Micro Adjustable Side Fence



WARRANTY
WITH
ONLINE
REGISTRATION



trend

# CRAFTPRO ROUTER CUTTERS THE CRAFTPRO RANGE

NEW

pages 72-98

Specially designed PTFE coated TCT tooling to meet the needs of the woodworker & tradesperson for quality & performance.



Tungsten Carbide Tipped



Highly Ground Tip Face



Non-Stick Coating For Longer Life

SUITABLE FOR:

SOFTWOODS, HARDWOODS & MAN MADE BOARDS

# ROUTER POD

When routing templates or jigs (using a router fitted with a guide bush), the Router Pod allows you to safely stand your router upright between uses.



Improved Stability



Increased Safety



# THE UK'S No.1 BRAND OF ROUTER CUTTERS

With over 2000 cutters, Trend's router cutter range is the most comprehensive on the market.

### **OUR ROUTER CUTTER RANGES**

### **PROFESSIONAL**

**WITH OVER 1,700 LINES** 







The most popular range of Tungsten Carbide Tipped router cutters in the UK. See pages 9-69.

HSS grade is also available for softwoods and the window industry. See pages 13-14, 25, 68, 70-71.

A range of rasps, burrs and composite cutters for a variety of materials including GRP, phenolics, carbon fibre and Alucobond®. See page 66.



WITH OVER 500 LINES




Comprehensive range of **Tungsten Carbide Tipped cutters** specifically designed for the needs of the woodworker. See pages 72-98

### SETTING THE PERFORMANCE STANDARD

We use the latest computer aided techniques for the research and development of our router cutters.

The highest quality micro-granular grades of Tungsten Carbide are used in their manufacture and this quality ensures that Trend cutters maintain their edges under the most arduous conditions.

Controlled allow the router's power consumption to be measured. The low level the ability of our tooling to maintain sharp cutting edges.



### SUITABLE FOR:



Softwoods



**Hardwoods** 



Man-made boards



**Plastics** 

LEADING THE WAY IN **TECHNOLOGY** AND INNOVATION

You will see this symbol throughout the catalogue guiding you to over 70 online Trend videos.



Examples:

YouTube





### **ASSOCIATIONS**

Trend are members of the







### **QUALITY CONTROL**

Consistently high standards are guaranteed by strict quality control

procedures and inspection by our quality controllers. Our quality system is BS EN ISO 9001: 2015 registered to comply with international standards. Items described bsi. ISO in this catalogue may not necessarily be manufactured under a registered ISO 9001: 2015 management system.



### SAFETY INFORMATION

Before using Trend products, read our comprehensive Safety Information online or see page 119.







### PROFESSIONAL ROUTER CUTTERS



The most popular range of Tungsten Carbide Tipped Router Cutters in the UK. For the most demanding applications in the manufacturing and woodworking trades.

- Specially developed micro-granular Tungsten Carbide Tips from the world's leading carbide manufacturer.
   Designed to withstand the most abrasive of materials giving a longer life.
- Highly ground tip face ensures perfect sharpness and gives a cleaner cut on softwoods, hardwoods, MDF, plywood and chipboard.
- Advanced automated grinding improves the carbide's resistance to wear and gives longer life when cutting abrasive materials.
- Straight cutters feature radial ground clearance for greater support to the cutting edge. TCT plunge centre tips are on straight cutters over 9.5mm in diameter.
- Production is fully automated on custom designed and built machines to give the highest level of accuracy and precision.
- Continuous laboratory testing of tools during the production process ensures all our tooling meets the safety standards set by EN847.

# PROFESSIONAL ROUTER CUTTERS

NOUTEN COTTENS	
STRAIGHT FLUTED & KITCHEN FITTERS PACKS	10-13
SPIRALS & PCD TOOLING	14-15
ROTA-TIP	16-19
TRIMMERS & PROFILERS	20-25
REBATE & RECESSER	26-27
JOINTING CUTTERS	28-29
CHAMFER & 'V' GROOVE	30-31
DOVETAIL	32-33
OVOLO & ROUNDING OVER, JOINTERS & SCRIBERS	34-37
BEAD & REED	38-40
EDGE MOULDING, CAPILLARY & DRAWER PULL	40-43
RADIUS, COVE & CAVETTO	44-45
OGEE & CLASSIC MOULD	46-47
PROFILE SCRIBING	48-49
PANEL MOULDING	50-53
MINIATURE BEARING	54
SLOTTING & GROOVING	<i>55-59</i>
WEATHERSEAL CUTTERS & INTUMESCENT RECESSING	60-62
ROUTER DRILLING	63
SOLID SURFACE	64-65
COMPOSITES	66
SPECIAL APPLICATIONS	67-69

### **SUITABLE FOR:**



TWO FLUTE



• Tungsten Carbide Tipped for abrasive materials such as chipboard, MDF, plywood, hardwoods and hard plastics.

STRAIGHT FLUTED

- Two flutes give a clean finish to the cut edges.
- All cutters are suitable for plunge routers unless stated.
- Cutters above and including 9.5mmØ have TCT plunge centre tip.
- For cutters with extra long shanks, see 'Pocket Cutters' on page 8.

### **KEY TO PRODUCT REFERENCES**

Prefix S = Solid Tungsten Carbide (STC).

Suffix D = Especially suited for drilling.

Suffix M = Short shank for Makita 3600B & 3612BR, Ryobi & Hitachi routers.

Suffix C = Conventional ground for additional clearance.

- ★ Solid Carbide insert. Handle small diameter cutters with care, take shallow passes.
- No centre TC tip, so not suitable for plunging abrasive materials.
- C For hollow board worktop only. Use on a router with 80mm plunge and one-piece multi-slit collet.
- w For use with Trend Worktop Jigs.
- For use with Trend Hinge Jigs.
- For use with Trend Lock Jigs.

TC Shank Diameter

Note Diameter dimensions shown in bold denote exact size.

D	D	С			Overall L		Product		TC Shank I			
inch	mm	mm	1/4"	8mm	3/8"	1/2"	Ref.	1/4"	8mm	3/8"	1/2"	
5/64	2.0	5.0	43.0	50.0	-	-	3/06	★£25.79	★£25.79	-	-	
-	2.5	8.0	48.0	00.0	-	-	3/04	★£22.23	-	-	-	
-	3.0	11.0	51.0	-	-	-	3/05	★£22.37	-	-	-	
1/8	3.2	11.0	51.0	-	-	56.0	3/10	★ £22.23		-	★£22.23	
-	3.4	11.0	51.0		-	-	3/11	★£20.90	-	-	-	
5/32	4.0	11.0	51.0	51.0	-	63.0	3/01	★ <u>£22.23</u>	★£17.26 +	-	★£21.57	
5/32	4.0	15.9	56.0	-	-	-	3/07	★£20.90	-	-	-	
-	4.5	11.0	51.0	-	-	-	3/03	★£23.69	-	-	-	
3/16	4.7	11.0	51.0	-	-	56.0	3/0	★£22.23	-	-	★£22.23	
13/64	5.0	16.0	56.0	56.0	-	63.0	3/1	<b>★</b> £25.79	-	-	£25.79	
7/32	5.5	19.0	51.0	-	-	-	3/13	£27.13	-	-	-	
15/64	6.0	16.0	48.0	54.0	56.0	61.0	3/2	£27.68	£21.07 +	-	★£30.56	
15/64	6.0	25.0	57.0	-	-	65.0	3/24	£25.82	-	-	£37.32	
414	0.0	44.0	44.0				0/40	004.57				
1/4	6.3	11.0	44.0	-	-	-	3/12	£21.57		-		
1/4	6.3	16.0	47.0	-	57.0	69.0	3/20	£23.69	•	-	★£33.34	
1/4	6.3	19.0	51.0	-	-	64.0	3/02	£24.34	-	-	★£32.38	
1/4	6.3	25.0	56.0	-	62.0	70.0	3/22	£26.47	-	-	£38.24	
1/4	6.3	25.0	50.0	-	-	-	S3/22	£33.34	-	-	-	
1/4	6.3	28.0	63.0	-	-	-	S3/21	£39.70	-	-	-	
_	6.5	25.0	57.0	_	_	_	3/23	£27.79	-	_	_	
9/32	7.0	19.0	50.0	56.0	-	63.0	3/3	£26.47		-	£26.47	
9/32	7.0	25.0	-	-	-	63.0	3/31	-			£27.13	
19/64	7.5	19.0	51.0	-	_	-	3/30	£27.13	_	_	-	
5/16	7.9	25.0	70.0	70.0	-	-	3/42	£27.13	£21.07 +	-	-	11/14/
5/16	8.0	19.0	52.0	57.0	-	65.0	3/4	£27.13	£26.34 +	-	£29.90	
5/16	8.0	25.0	57.0	-	-	69.0	3/41	£30.56	-		£31.36	
5/16	8.0	25.0	70.0	70.0		-	3/43	£27.13	£27.13		-	
J/10 -	8.1	25.0	70.0	70.0	-	-	3/44	£27.13	£21.07 <b>+</b>	-	-	
-	8.9	25.0	70.0	70.0	-	-	3/45	£27.13	£21.07 +		_	
23/64	9.0	19.0	51.0	-	-	68.0	3/5	£27.13	LZ1.01 T		£28.58	
23/64	9.0	25.0	- 31.0			70.0	3/52	<u>LZ1.13</u>	-	-	£27.10	
23/04	9.0	25.0	-	-	-	70.0	3/32	-	•	-	227.10	William Control of the Control of th
3/8	9.5	19.0	-	-	-	65.0	3/54	-	-	-	£22.45 +	
3/8	9.5	25.0	58.0	-	63.0	71.0	3/50	£29.24	-	£30.56	£27.13	
3/8	9.5	25.0	-	-	63.0	-	S3/50	-	-	£45.94 +	-	
3/8	9.5	32.0	64.0	-	-	76.0	3/51	£33.34		-	£33.34	
25/64	10.0	19.0	51.0	51.0	55.0	63.0	3/6	£27.79	-	-	£27.79	
25/64	10.0	25.0	57.0	-	-	69.0	3/61	£27.13	-	-	£27.13	
25/64	10.0	25.0	-	-	-	69.0	3/61DC	-	-	-	£26.34	
25/64	10.0	30.0	-	-	-	74.0	3/62	-	-	-	£36.14	
25/64	10.0	35.0	-	-	-	81.0	3/60	-	-	-	£41.69	

D inch	D mm	C mm	Approxima	ate Overall L 8mm	ength OL 1/2"	Product Ref.	TC 1/4"	Shank Diameter	1/2"
7/16 15/32 15/32 15/32	11.0 12.0 12.0 12.0	25.0 19.0 19.0 25.0	57.0 51.0 66.0	- 51.0 -	69.0 61.0 - 68.0	3/7 3/8 3/8L 3/71	£30.56 £30.30 <b>H</b> £30.30	£23.22 +	£29.90 £30.30 - £27.79
15/32 15/32 15/32 15/32 15/32	12.0 12.0 12.0 12.0 12.0	32.0 38.0 50.0 50.0 50.0	65.0 - - - -	-	73.0 80.0 84.0 109.0 109.0	3/74 3/72 3/73DM 3/73 3/73D	£32.68 - - - -	-	£32.68 £32.68 £42.09 £39.70 £43.15
15/32 15/32 31/64	12.0 12.0 12.55	63.0 63.0 25.4	67.0	-	114.0 100.0 -	3/75 3/75M 3/76	<u>-</u> <u>£32.68</u>	-	£45.25 £47.27
1/2 1/2 1/2 1/2 1/2	12.7 12.7 12.7 12.7 12.7	19.0 25.0 32.0 32.0 32.0	51.0 55.0 64.0 -	- - - -	68.0 74.0 73.0 77.0	3/80 3/08 3/81 3/81DC S3/81	£27.13 £27.79 £34.14 -	- - - -	£27.79 £27.79 £27.79 £85.49
1/2 1/2 1/2 1/2 1/2 1/2	12.7 12.7 12.7 12.7 12.7 12.7	37.0 50.0 50.0 48.0 50.0 63.0	-	-	79.0 108.0 99.0 99.0 99.0 115.0	3/82 3/83 3/83D 3/83DU 3/83DC 3/85	-	- \ - \	£38.24 £35.73 N £38.36 N £38.62 N £38.36 E47.27
33/64	12.7	75.0	52.0		133.0	3/86C 3/9	£30.56		c £52.12
33/64 35/64 35/64 35/64 <b>9/16</b>	13.0 14.0 14.0 14.0 14.3	26.0 20.0 25.0 50.0 25.0	57.0 58.0 56.0 - 58.0	57.0 - - -	72.0 - 67.0 95.0 69.0	4/0 4/05 4/01 4/03 4/02	£43.15 £31.90 £32.68 - £28.07 +	- - - -	£43.15 £32.68 £61.92 £36.14
19/32 19/32 19/32	15.0 15.0 15.0	25.0 25.0 35.0 63.0	57.0 - -	57.0 -	67.0 76.0 115.0	4/02 4/1 4/04 4/09	£47.49 - -	- - -	£47.49 £47.49 £56.96
5/8 5/8 5/8 5/8 5/8 5/8	15.9 15.9 15.9 15.9 15.9 16.0	25.0 32.0 37.0 50.0 63.0	57.0 - - - - 52.0	- - - - 52.0	66.0 74.0 79.0 96.0 105.0 60.0	4/26 4/20 4/21 4/22 4/24 4/2	£43.81 - - - - £29.90	- - - -	£43.81 £36.92 £48.04 £52.80 £59.81 £35.46
5/8 5/8 43/64	16.0 16.0 17.0	25.0 35.0 25.0	54.0	-	67.0 67.0	4/27 4/28 4/25	£41.02	-	£42.73 £40.02 £41.02
45/64 45/64 23/32 23/32	18.0 18.0 18.2 18.2	25.0 50.0 21.0 32.0	57.0 - 53.0	- - -	67.0 92.0 62.0 74.0	4/29 4/30 4/4 4/40	£41.69 - £33.34	- - -	£41.69 £58.35 £37.57 £50.00
3/4 3/4 3/4 3/4	19.1 19.1 19.1 19.1	25.0 37.0 50.0 63.0	58.0 - - -	58.0 - - -	67.0 79.0 92.0 105.0	4/5 4/50 4/51 4/52	£40.37 - - -	- - -	£40.37 £48.71 £53.60 £71.32
25/32 25/32 53/64 55/64 55/64	20.0 20.0 21.0 22.0 22.0	20.0 25.0 19.0 19.0 25.0	53.0 57.0 50.0 50.0	57.0 50.0	- 66.0 59.0 57.0 66.0	4/63 4/6 4/62 4/60 4/66	£44.15 £45.25 £47.27 £33.34	- - - -	£45.25 £47.27 £33.34 £37.55
7/8 7/8	22.2 22.2	19.0 31.0	51.0	-	73.0	4/07 4/7	£36.14	-	- £47.27
29/32 61/64 63/64	23.0 24.0 25.0	19.0 19.0 25.0	50.0 50.0 56.0	50.0 56.0	57.0 59.0 65.0	4/71 4/72 4/70	£45.92 £47.27 £46.58	£36.71 + £36.18 +	£45.92 £47.27 £46.58
1 1 1	25.4 25.4 25.4	19.0 25.0 37.0	51.0 - -	-	60.0 68.0 79.0	4/08 4/8 4/80	£43.81 - -		£43.81 £48.04 £59.81
1-1/32 1-1/16 1-7/64 1-1/8 1-3/16 1-1/4 1-3/8	26.0 27.0 28.0 28.6 30.0 31.8 35.0	25.0 32.0 25.0 25.0 25.0 25.0 25.0	- - - - -	-	65.0 72.0 66.0 67.0 67.0 67.0	4/82 4/83 4/85 4/9 4/91 4/90 4/10	-	- - - - - -	£60.48 £63.24 £66.03 £66.03 £67.49 £67.49 £70.93
1-1/2 1-37/64 1-5/8 1-3/4 1-31/32 2	38.1 <b>40.0</b> 41.3 44.5 <b>50.0</b> 50.8	25.0 25.0 25.0 32.0 25.0 25.0	- - - -	- - - - -	66.0 66.0 66.0 73.0 63.0 66.0	4/12 4/92 4/93 4/94 4/96 4/15	-	: : :	£68.91 £72.05 + £74.21 £74.21 £74.21

### HOW TO ORDER

### Please state:

- Product Ref.
- Shank Dia. Grade, eg. TC



Imperial Metric 3.2mm 1/4" 6.3mm 3/8" 9.5mm 12.7mm

Cans of Trendicote are available to prevent resin build-up on cutters and sawblades. See p.234 for full details. Product Ref.

# **TRENDICOTE**

### **KITCHEN** FITTERS PACK

- Gives a clean finish to abrasive materials such as chipboard, MDF, plywood and certain hardwoods.
- Includes 2 x 1/2" Worktop Cutters, 10 x No.20 Biscuits & 6 x 150mm Panel Bolt Connectors.



WRef. 3/83, 3/83D, 3/83M, 3/83DC & 3/85 - 1/2" shank 12.7mmØ cutters suitable for use with Trend Kitchen Worktop Jigs. For Worktop Jigs see pages 158-162.

Ref. 3/86C - 1/2" shank 12.7mmØ extra long TCT cutter. Only for use on lightweight honeycomb worktops with a professional router with 80mm deep plunge & suitable one-piece multi-slit collet, to ensure safe cutter retraction into base.

### THREE PIECE **KITCHEN** FITTERS PACK

- For kitchen worktops.
- Tungsten Carbide Tipped.
- Two flutes give a clean finish to cut edges.
- Supplied in a storage case.

D mm C mm 12.7 50.0

3 Piece Product Ref. Price 1/2" shank KFP/1 £64.06

### **FIVE PIECE KITCHEN FITTERS PACK**

- · For kitchen worktop routing.
- Tungsten Carbide centre tips.
- Superior quality for long life on natural & man-made boards.






D mm C mm Product Ref. \*5 x 12.7 50.0 3/83DX1/2TC






### SINGLE FLUTE

- · Eccentric single flute cutters.
- Cutters are chosen for fast free cutting, when cutting speed takes preference over finish.
- Cutters with prefix S are Solid Carbide.
- ▲ Cutters of 2.0mm diameter and below should have a maximum of 1.0mm depth of cut per pass.
- ▲ Small diameter tools must be handled with care to avoid breakage.
- ▲ Single flute cutters should not be used in eccentric chucks.
- These cutters have Solid Carbide inserts rather than brazed tips.



trend



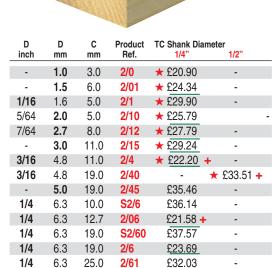


### **STC SOLID TUNGSTEN CARBIDE**

- These cutters are turned, milled and ground from a solid piece of Tungsten Carbide and provide the greatest durability when used under stress load conditions.
- They offer better plunge cutting characteristics than TCT.
- Many more re-sharpenings can be obtained from STC tools.
- A harder grade of carbide is used as the tool is not brazed.


Single flute -

- Two flute finer finish.
- Single flute fast feed rate.
- Single flute cutters should not be used in eccentric chucks.



£85.49

Ref. S2/60



S	SINGLE	FLUTE					
	D	D	С	Product		Shank Dian	
_	inch	mm	mm	Ref.	1/4"	3/8"	1/2"
	1/4	6.3	10.0	S2/6	£36.14	-	-
	1/4	6.3	19.0	S2/60	£37.57	-	-
Т	WO FL	UTE					
	D	D	С	Product		Shank Dian	
_	D inch	D mm	C mm	Product Ref.	STC 1/4"	Shank Dian 3/8"	neter 1/2"
i	_	-	•				
i	inch	mm	mm	Ref.	1/4"	3/8"	1/2"
	inch 1/4	mm 6.3	mm 11.0	Ref. S3/12	1/4" £32.37	3/8"	1/2"

### **POCKET CUTTER**

 Single and two flute cutters with extra long shanks.

5/16

3/8

7.9

9.5

25.0

25.0

2/63

2/7


- All the single flute tools and Refs. 3/20L, 3/55L & 3/84L have recessed shanks to allow deeper cutting.
- Deep grooving, rebating and mortising.
- Useful for template work when thickness of template restricts depth.
- Ref. 3/8L is suitable for use with Trend Hinge Jigs & Lock Jigs.
- Extra care must be taken to avoid breakage. Take more passes than usual, and only cut up to half the diameter of the cutter in one pass. This applies to cutters under 9.5mm diameter.





£24.36 +

£30.56



Tools with recessed shanks. allow deeper cuts

3/8'

TC Shank Diameter 8mm

Ref. 2/6L



SINGLE	FLUT	E					
D	D	С	C2	OL	Product		TC :
inch	mm	mm	mm	mm	Ref.	1/4"	8r
1/4	6.3	19.0	19.0	70.0	2/6L	£26.52	+

T		
	_	7
OL 		c
		C2
1	I D	<u> </u>


	IWOF	LUIE								
	1/4	6.3	19.0	19.0	70.0	3/20L	£32.03	-	-	-
	3/8	9.5	32.0	19.0	79.0	3/55L	-	£31.35 -	£27.54	+ -
	-	12.0	-	19.0	66.0	3/8L	H £30.30	) -	-	-
c	1/2	12.7	22.0	32.0	95.0	3/84L	-	-	-	£35.46
1 1	5/8	15.9	-	32.0	95.0	4/23L	-	-	-	£33.03 -
C2	3/4	19.1	-	32.0	92.0	4/5L	-	-	-	£39.98 -

### **INLAY CUTTER**

• Tungsten Carbide Tipped.

12.7 32.0 **S3/81** 

- Single and two flute cutters specifically designed for inlaying stringing lines and bands to exact specifications.
- Have Solid Carbide inserts.
- Very shallow passes must be made to avoid breakage.



SINGLE F	LUTE			D D
D inch	D mm	C mm	Product Ref.	Shank Diameter 1/4"
-	1.5	6.0	2/01	£24.34
-	1.8	6.0	2/02	£26.47
-	2.0	5.0	2/10	£25.79
7/64	2.7	8.0	2/12	£27.79
TWO FLU	TE			
D inch	D mm	C mm	Product Ref.	Shank Diameter 1/4"
1/8	3.2	11.0	3/10	£22.23
-	3.4	11.0	3/11	£20.90

3/03


£23.69

4.5

11.0

### **UP-DOWN SHEAR**

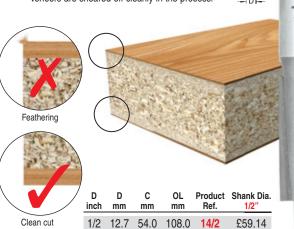- Tungsten Carbide Tipped.
- Two flute with tips sheared up & down, giving a fine finish.
- For trimming veneered & double-faced boards, plywoods & natural timbers.
- Have the action of pushing chips towards the middle of the board being cut, ensuring that the veneers are sheared off cleanly in the process.



TCT cutters with staggered cutting surfaces.

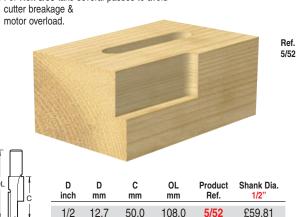
• Deep mortising & grooving gives good chip clearance.

For lock mortising, two width cuts will be needed to achieve the standard 19mm mortise.

The lock mortiser Ref. 5/53 will plunge and clear chips to a depth of 70mm in a number of passes.


Tools have extra long shanks. Adjust the cutter in the collet to achieve maximum plunge depth.

▲ For Ref. 5/53 take several passes to avoid cutter breakage &



### **DOWN-CUT** SHEAR

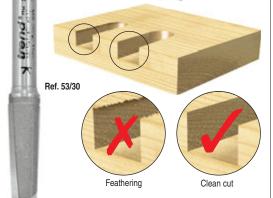- Tungsten Carbide Tipped.
- Two flute cutters with a positive shear angle (down-cut) for fast cutting and fine finish.
- · Ideal for grooving and trimming veneer finishes and laminated boards.
- · Down-cut feature stops break out on top edge.
- Ref. 53/30 & 53/82 have a 4° shear. Ref. 53/83 has a 3° shear.



TO IN

14/2/1/2TC 00.1

_			100	N.					
	D inch	D mm	C mm	1/4"	OL 8mm	1/2"	Product Ref.	Shank D 1/4"	iameter 1/2"
╁┪┰	3/8	9.5	25.0	54.0	54.0	70.0	53/30	£29.90	£32.03
C	1/2	12.7	38.0	-	-	79.0	53/82	-	£41.69
	1/2	12.7	50.0	-	-	107.0	53/83	-	£43.15

### HINGE RECESSER

16.0

50.0

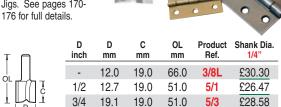
103.0

5/53

£61.92

5/8

- Two flute TC cutters giving good chip clearance.
- · Ideal for shallow lateral routing cuts such as recessing hinges.
- Corners will require final trimming square with a hand chisel or a corner chisel.
- Ref. 3/8L is suitable for Trend Hinge & Lock Jigs. See pages 170-



Ref.





### STRAIGHT FLUTED

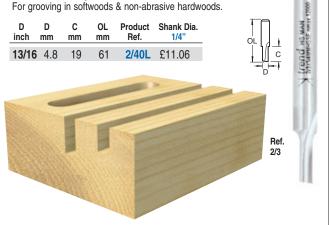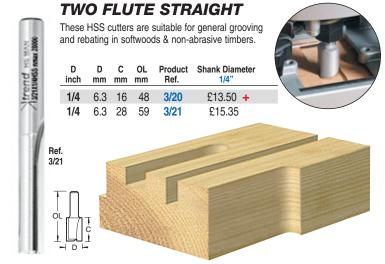- · Single piece High Speed Steel tooling.
- Ground with a very fine edge for superior cut in softwood.
- For use in softwoods and non-abrasive hardwoods.

### SINGLE FLUTE STRAIGHT

For fast free cutting, these HSS cutters have extra clearance.





### SPIRAL CUTTERS



### STC

### **UP-CUT (RIGHT HAND) SPIRAL**

- Spiral cutters are not only ideal for use in CNC machines and for fixed head routing applications, they can also be used in portable routers.
- Feed rates range from 5 10m/min with speeds of 18,000 -24,000 RPM.
- · Solid Tungsten Carbide, ideal for hardwoods and abrasive
- Produces a fine finish. Up-cut prevents burning in plunge cuts.
- Permits high feed speed and allows better chip clearance.
- Two fluted spiral.



D inch	D mm	C mm	OL mm	Product Ref.	Sh 1/4"	ank Diame 8mm	ter 1/2"
1/8	3.2	12.7	50.8	S55/02	£24.34	-	-
5/32	3.96	15.9	63.5	S55/03	£26.47	-	-
3/16	4.76	19.1	63.5	S55/04	£29.24	-	-
1/4	6.35	25.4	63.0	S55/2	£32.68	-	-
-	8.0	25.0	63.0	S55/06	-	£30.56	-
3/8	9.5	31.8	76.0	S55/3	-	-	£75.04
1/2	12.7	31.8	76.0	S55/4	-	-	£77.80

S55/5

101.0 **S55/6** 

### STC

1/2

1/2

12.7

12.7

38.0

50.8

89.0

Ref. S55/4

### DOWN-CUT (LEFT HAND) SPIRAL

· Down-cut spirals are ideal for routing small workpieces or for holding workpieces securely in vacuum jigs.

Down-cut pushes wood chips below the work.





D	D	С	OL	Product	Sha	ank Diam	eter
inch	mm	mm	mm	Ref.	1/4"	8mm	1/2"
1/8	3.2	12.7	50.8	S55/02LH	£24.34	-	-
5/32	3.96	15.9	63.5	S55/03LH	£26.47	-	-
3/16	4.76	19.1	63.5	S55/04LH	£29.24	-	-
1/4	6.35	25.4	63.0	S55/2LH	£32.68	-	-
5/16	7.9	25.4	76.0	S55/05LH	-	-	£63.98 +
-	8.0	25.0	63.0	S55/06LH	-	£30.56	-
3/8	9.5	31.8	76.0	S55/3LH	-	-	£75.04
1/2	12.7	31.8	76.0	S55/4LH	-	-	£77.80
1/2	12.7	38.0	89.0	S55/5LH	-	-	£86.93
1/2	12.7	50.8	101.0	S55/6LH	-	-	£121.72

### STC

### **UP-DOWN CUT** (COMBINED)

- Fine finish on both sides of solid timber.
- · Ideal for edge trimming.
- For use on 16mm boards.
- Single fluted compression spiral.



Ī	
$ \mathcal{M} $	
	D
(Ŋ ¢	inch
1 1	1/4
D	., .

D inch	D mm	C mm	OL mm	Product Ref.	Shank Diameter 1/4"
1/4	6.35	19.0	64.0	S57/01	£72.53

### HSS

£86.93

£121.72

### **UP-CUT (RIGHT HAND) SPIRAL**

- Ideal for softwoods where a fine finish is required.
- Up-cut prevents burning in plunge cuts.
- Two fluted spiral.




D	D	С	OL	Product	Sh	ank Diame	ter
inch	mm	mm	mm	Ref.	1/4"	8mm	1/2"
-	8.0	19.0	80.0	55/08	£39.70	£37.57	-
3/8	9.5	37.0	87.0	55/09	-	-	£43.81

### **BALL END UP-CUT SPIRAL**

- Solid Carbide long reach with superior performance in 3-D carving.
- Ball end to give clean transition between depths.

· Two fluted up-cut spiral.





D	С	OL	Product	Shank I	Diameter
mm	mm	mm	Ref.	3mm	6mm
3.0	25.0	65.0	S59/3	£57.67	-
6.0	25.0	75.0	S59/6	-	£82.05

Ref. S55/4LH





### PCD/DP

### **POLYCRYSTALLINE DIAMOND TIPPED CUTTERS**

Polycrystalline Diamond (PCD) tipped cutters give a significant increase in tool life compared to TC tooling due to their high wear resistance.

PCD also gives an accuracy of cut throughout the tool life and faster feed rates as well as reduced downtime.

For use in fixed head, NC or CNC routers only. For fixed head with auto feed, CNC or NC only. Not for use in hand routers (except Ref. PCD/GEM01).

Applications: Use on MDF, HDF, hard natural timber, veneered and laminated particle board, plywood, hardboard and solid laminate.

### **SUITABLE FOR:**


Man-made Boards Hardwoods





### **DISPOSABLE PCD FOR MDF** • Single flute with TC plunge tip. • For MDF, hardboard & solid laminate.


- Single flute prevents edge lines.
- · High wear resistance.
- Longer tool life and therefore reduced
- · Cannot be resharpened.



D inch	D mm	C mm	OL mm	Product Ref.	Shank Diameter 1/2"
1/2	12.7	25.4	68.0	PCD/10	£146.31
5/8	15.9	25.4	68.0	PCD/11	£170.90

### **SERVICEABLE** PCD FOR MDF

- Single flute with TC plunge tip.
- For MDF, hardboard & solid laminate.
- Single flute prevents edge lines.
- Can be serviced for extended life.
- · High wear resistance.



inch	mm	mm	mm	Ref.	1/2"
1/2	12.7	25.4	68.0	PCD/20	£244.67
5/8	15.9	25.4	68.0	PCD/21	£244.67
3/4	19.1	25.4	68.0	PCD/22	£244.67

### **PCD FOR GEMSTONE WORKTOPS**




- Specifically designed for Gemstone worktop which has 6mm solid material bonded to a chipboard core.
- For use with a hand held router and jig. Please see website for more information.

D	D	C	OL	Product	Shank Dia.
inch	mm	mm	mm	Ref.	1/2"
1/2	12.7	39.0	89.0	PCD/GEM01	£171.99

### SERVICEABLE **PCD FOR CHIPBOARD**

- Segmented tip with TC plunge tip.
- For laminated/veneered chipboard and plywood.
- Up-cut and down-cut shear to prevent breakout for veneers and laminates.
- Can be serviced for extended life.
- High wear resistance.







Ref. PCD/32

	D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/2"
	1/2	12.7	25.4	68.0	PCD/30	£220.07
}  ) c	5/8	15.9	25.4	68.0	PCD/31	£232.37
	3/4	19.1	25.4	68.0	PCD/32	£232.37

### SERVICEABLE T-SLOT · Segmented tip for MDF. · High wear resistance. Slat wall cutter to accept a plastic extrusion. Can be serviced for extended life.

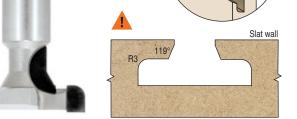



### ROTA-TIP REPLACEABLE TIPS



- Solid Carbide replaceable blades.
- . Tool body remains in place when changing blades, reducing down-time.
- . Straight cutters have blades with two or four cutting edges, allowing them to be rotated and locked in identical positions.
- 1/2" shank tools are ideal for use in production applications.
- Clear economical advantage over conventional brazed tip tooling.

### SINGLE REPLACEABLE BLADE

- The single blade can be rotated 180° to give double the life of a conventional tool.
- Ref. RT/12M has a shorter shank, designed for use with Makita 3600B and 3612BR, Ryobi and Hitachi
- Ref. RT/11\* & RT/11M\* have a single 29.5mm blade with relieved neck, giving 50mm length of cut capacity when taking a series of passes.

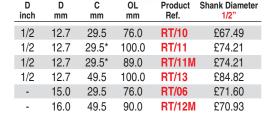




Ref. RT/10











### **COMBI JIG SINGLE** FLUTE REPLACEABLE **BLADE WORKTOP CUTTER**





- Relieved neck tool, giving 50mm length of cut capability when taking a series of passes.
- Ref. RT/11/PK1 includes three extra carbide blades Ref. RB/A.
- for use with Makita 360013 and 3612BR, Ryobi and Hitachi routers.

T	]
OL_	] -
	50mm C
D	-

SPARE BLADES	Product Ref.	Price
Straight blade (1 off)	RB/A	£7.67
Straight blades (10 off)	RB/A/10	£67.49



### Ref. RT/11M has a shorter shank designed С OL Product Shank Dia. inch mm mm mm Ref. 1/2" 12.7 29.5 100.0 **RT/11** £74.21 1/2 1/2 12.7 29.5 89.0 **RT/11M** £74.21 1/2 12.7 29.5 100.0 RT/11/PK1 £84.82

### ASSOCIATED PRODUCTS

### **COMBI WORKTOP JIGS**

See page 159 for full details.

Product Refs. **COMBI1002** 



### KWJ SINGLE FLUTE REPLACEABLE TIP **WORKTOP CUTTER**

- Single blade can be rotated 180° to give double the life of a conventional tool.
- · Ideally suited for use with the Trend KWJ worktop jigs.

To be used on chipboard only.





inch	mm	mm	mm	Ref.	1/2"
1/2	12.7	49.5	100.0	RT/13	£84.82
CDVDE	BI AD	EG		Product Pof	Drico

SPARE BLADES	Product Ref.	Price
Straight blade (1 off)	RB/H	£9.14
Straight blades (10 off)	RB/H/10	£75.04

### TRADESMAN KWJ WORKTOP JIGS

See pages 158, 160-162 for full details

Product Refs.

**KWJ650 KWJ700** KWJ700S **KWJ900** 



### TWO REPLACEABLE BLADES

- Blades can be rotated 180° to give double the life of a conventional tool. Not recommended for plunge cutting unless ramped into workpiece.
- · Used for rough cutting only & have staggered blades.





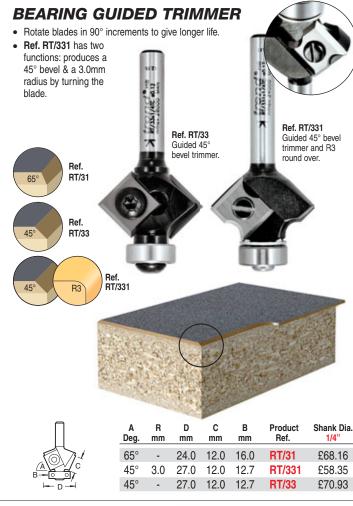
Can be ramped down into workpiece when grooving.



D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/2"
3/4	19 1	50.0	107.0	RT/23	£74 48













19.1

19.1

29.5

50.0

19.05

19.05

RT/71 £92.83

RT/72 £108.99

90° 3/4

90°

3/4

### **BEARING GUIDED** TRIMMER

- Blades of cutters Refs. 46/01 & 46/03 can be rotated through 180° to give one new cutting
- Blades for Ref. 46/010 can be rotated by exchanging blades over.
- Ref. 46/02 has blades that can be rotated in 90° increments giving three extra new edges.

















### 'V' GROOVER **ENGRAVER**

- · Single blade.
- Blades can be rotated in  $90^{\circ}$ increments, giving three new edges.
- Ref. RT/80 is specifically designed for CNC machines.



Ref. RT/80 sign engraving in a ČNC machine.








	OL	
A P	<u>c</u>	

Α	D	С	OL	Product	Shank I	Diameter
Deg.	mm	mm	mm	Ref.	1/4"	1/2"
45°	17.0	8.0	49.5	RT/81	£58.35	-
45°	17.0	8.0	60.0	RT/80	-	£72.24

### STAIR HOUSING

- Designed for stair housing router machines and jigs. Please state LH or RH when ordering.
- Ref. RT/323 RH can be used for 32mm tread thickness in conjunction with Trend Stair Jig Ref. STAIR/A.







	1 †	
	1 0	
	To I	
CAL)		
<b>⊢</b> -D		

A Deg.	D mm	C mm	OL mm	Product Ref.	Rotation	Shank Dia.
95°	22.0	28.0	80.0	RT/323	LH	£106.27 +

### **BEARING GUIDED REBATER** Two blades. Ideal for rebating straight and shaped workpieces. · Low profile bearing fixing screw. D С E В Product Shank Dia. mm mm mm Ref.

13.25

9.5

9.5

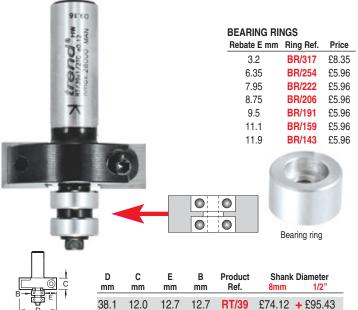
28.6

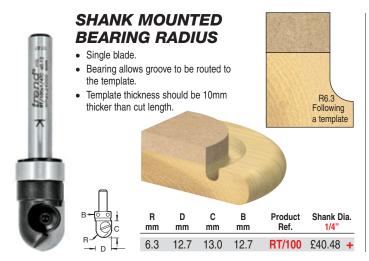
### **DOUBLE BEARING GUIDED REBATER**

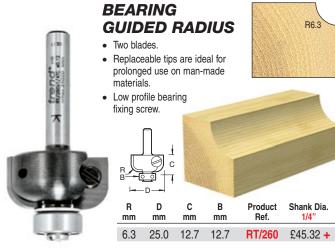
- Fitted with two blades that can be rotated giving three new edges.
- Fitted with a double bearing.
- · Bearing ring accessories can be fitted to give different rebate sizes. Rings are secured between the two bearings.

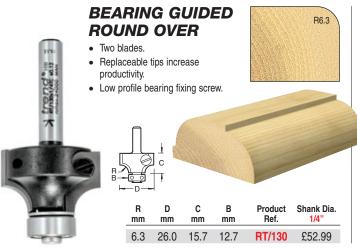


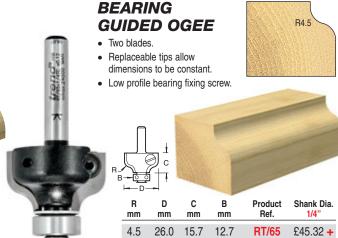
RT/391 £44.00 +

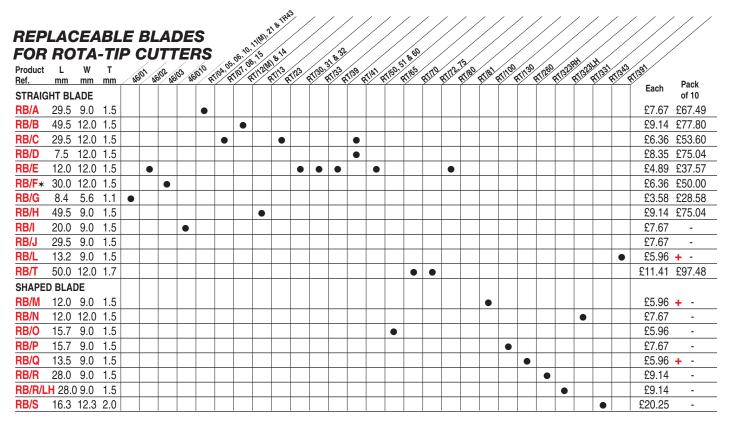















\* Blade **Ref. RB/F** does not have bevelled ends for clearance.








### ROTA-TIP REPLACEABLE TIPS

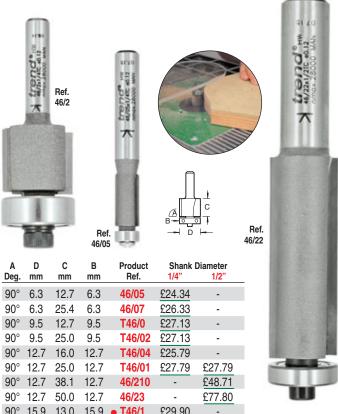Blades are fitted directly onto the tool body without removing the cutter from the router, reducing downtime to a minimum. When replacing blades, please ensure they are placed into the correct seating of the tool body. Ensure the body or slot is free of debris and/or burrs, as this may cause fracture of the blade. Do not overtighten fixing screws. Run test cuts prior to production to ensure blades are aligned correctly.




### **BEARING GUIDED 90° TRIMMER**

- · Self-guiding trimmers with bearings mounted on nose of cutters.
- For trimming plastic or plywood overlay.
- For copy profiling, use the bearing to follow a template or base edge of board.
- · A max. 3mm overlap should be left before copy profiling.
- Refs.T46/1, 46/2 and 46/20 are down-cut with 5° shear to prevent breakout on veneer.
- Ref. 46/211 has a sleeved bearing to allow for regrinds in case of re-sharpening.
- When using plastic laminate always allow laminate adhesive to dry before trimming. This avoids clogging the guide bearing.
- Tool diameters are 0.2mm smaller than bearing diameter.



90°	12.7	38.1	12.7	46/210	-	£48.71
90°	12.7	50.0	12.7	46/23	-	£77.80
90°	15.9	13.0	15.9	• T46/1	£29.90	-
90°	18.2	14.0	18.2	46/211	£31.36	-
90°	18.2	50.0	18.2	46/22	-	£77.80
90°	19.1	14.0	19.1	<ul><li>46/2</li></ul>	£39.70	-
90°	19.1	25.0	19.1	<ul><li>46/20</li></ul>	£48.04	£49.38
90°	19.1	50.0	19.1	46/212	-	£73.05
				_		

REPLACEMENT BEARINGS	Product Ref.	Price
For 46/05 & 46/07	B63B	£6.48
For T46/1	B16	£4.64
For T46/0, T46/02	B95A	£6.48
For T46/01, T46/04, 46/23 & 46/210	B127A	£5.18
For 46/22 & 46/211	B182	£9.80
For 46/2, 46/20 & 46/212	B19	£5.18




VIDEO

trend-uk.com/video





### **BEARING GUIDED** 90° LOW PROFILE **TRIMMER**



• For use in restrictive applications or within rebates of minimum 8mm height.

 Down-cut to prevent breakout on veneers.






Ref.

			D	-	
A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
90°	19.1	16.0	19.1	46/200	£42.49
90°	19.1	25.0	19.1	46/201	£49.38
REPLACEMENT BEARING					
For 46	6/200 & 4	46/201		B19A	£8.35

### **BEARING GUIDED MINIATURE FLUSH TRIMMER**

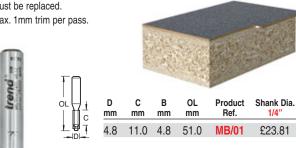- Ideal for sign-making, musical instrument building and other small intricate projects.
- Can be used on wood and plastic.
- Small bearing allows access into tight corners.
- A miniature bearing is fitted which has a limited life of approx. 100 linear metres, after which this consumable must be replaced.

Max. 1mm trim per pass.





Limited life miniature bearings.

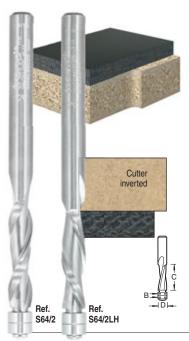












### **STC SOLID CARBIDE GUIDED SPIRAL TRIMMER**

- Two flute spiral with nose mounted bearing guide.
- Ideal for routing in tight corners.
- Down-cut ideal for veneered material with super fine finish.
- Twin bearings for stability by increasing bearing surface.

### **UP-CUT (RIGHT HAND) SPIRAL**

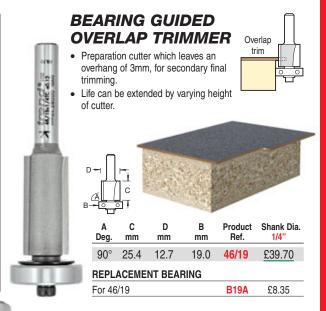
D	C	B	Product	Shank Dia.
mm	mm	mm	Ref.	1/4"
6.35	25.4	6.3	S64/2	£53.96 +

### DOWN-CUT (LEFT HAND) SPIRAL

D	С	В	Product	Shank Dia.
mm	mm	mm	Ref.	1/4"
6.35	25.4	6.3	S64/2LH	£69.47

REPLACEMENT BEARING

£6.48 For S64 (1off) **B63B** 



### **BEARING GUIDED 90°** TRIMMER & 'V'

**GROOVE** 




- · For trimming of laminate and solid lipping.
- 1.6mm deep 'v' groove to hide glue line.





To reduce 'v' groove depth to 1.0mm




	Π		
B-		C	
- -	D2 D	- 	

7

D mm	D2 mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"			
16.0	12.7	25.4	12.7	46/85	£29.90			
REPLAC	CEMENT	BEARIN	Product Ref.	Price				
Bearing	12.7mm(	Ø	B127A	£5.18				
ΔI TERN	VATIVE F	BEARING	Product Ref.	Price				

### **BEARING GUIDED 90° TRIPLE FLUTE**

- Self-guiding triple flute cutters.
- Extra fine trimming and longer life.
- For trimming of laminate or plywood overlay etc.
- Ref. 46/82 has twin bearings for stability by increasing the bearing surface and is an industrial profiling tool for longer runs of work.
- Ref. 46/84 2mm maximum trim per pass.



D	С	В	Product	Shank Diameter	
mm	mm	mm	Ref.	1/4"	1/2"
12.7	25.4	12.7	46/80	£32.03	-
12.7	38.1	12.7	46/82	-	£67.49
12.7	51.0	12.7	46/84	-	£75.04

REPLACEMENT BEARING	Product Ref.	Price
Bearing 12.7mmØ	B127A	£5.18





### 90° DOUBLE BEARING **GUIDED TRIMMER**


- Ball bearings fitted to both nose and shank.
- Allows templates to be placed either on the top or bottom of the material, for ease of routing.

pue

Ref. 46/82

> Ref. 46/80

- Allows for irregular grained timber to be profiled easily, by turning component other way up.
- Ref. 46/501 has four flutes for extra fine trimming.



B-00
→ D
B - G - C - C - C - C - C - C - C - C - C
B-00
→ D

TWO F	LUTE				
D mm	C mm	B mm	Product Ref.	Shank Dia 12mm	meter 1/2"
19.1	25.4	19.1	46/300	£58.89 + £	75.82
19.1	51.0	19.1	46/301	£63.73 + £	82.05

F	OUR	FLUTE	•				
	D mm	C mm	B mm	Product Ref.	Shank Dia 1/2"		
-	19.1	50.0	19.1	46/501	£84.84		
R	EPLA	CEME	NT BE	EARINGS	Product Ref.	Price	
F	or cut	ters ab	ove - c	B19	£5.18		

For cutters above - on shank


trend

**B19C** 

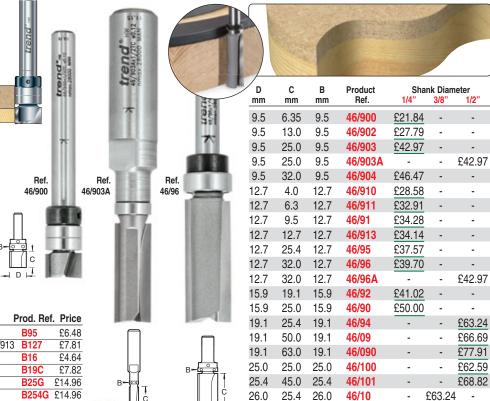£7.82

### SHANK MOUNTED **BEARING GUIDED 90°** TEMPLATE PROFILER

- · Profilers with shank mounted bearing guides to follow a template.
- For use with router mounted above or below a table.
- For profiling and rebating applications only. Not for plunge cutting/grooving.
- · A 3mm maximum overlap should be left before trimming.
- Refs. 46/900, 46/902, 46/910, 46/913 and 46/91 have a shorter cutter length for use on thin boards. They are ideal for template making.
- Refs. 46/900 and 46/902 have twin bearings.
- Refs. 46/903A and 46/96A have a threaded head and shank allowing a bearing to be fitted.



REPLACEMENT BEARINGS For 46/900, 46/902, 46/903, 46/903A & 46/904 For 46/91, 46/95, 46/96, 46/96A, 46/910, 46/911 & 46/913 For 46/90 & 46/92 For 46/09, 46/090 & 46/94 For 46/100 For 46/101 B254G £14.96 For 46/10 **B26E** £16.67



Specially designed tools with a threaded head and shank, allowing the bearing to be fitted.

· Ideal for access into tight corners.


Max. 1mm trim per pass.








124




For replacement collars, see Spare Parts on pages 120-121.

£6.48 Bearing 4.8mmØ (1 off) **B48J** Bearing 4.8mmØ (10 pack) B48J/10 £51.63 £6.48 Bearing 6.3mmØ (1 off) **B63B** Bearing 6.3mmØ (10 pack) B63B/10 £39.70 Limited life miniature bearings

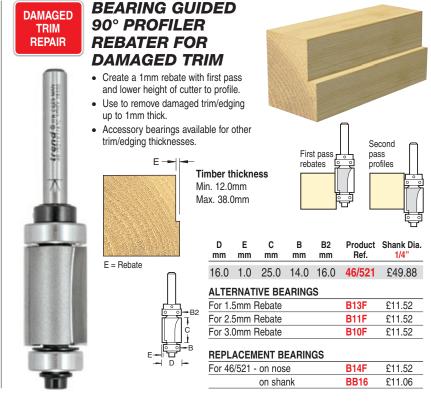corners SHANK MOUNTED trend & HK toos **BEARING GUIDED 90°** TEMPLATE OVERSIZE Oversize profiler allows component to be routed oversize to template. Useful when making jigs, templates & patterns. Ref. Can be used for trenching operations 26/3 in shallow passes. Ref. 26/4 is for Porter-Cable® Latch Template (59370). D С Е В Ref. mm mm mm mm 12.7





12.7

For 26/2

For 26/3

For 26/4

### LAMINATE TRIMMERS





### **STC GUIDED ECONOMY TRIMMER**

- Solid Tungsten Carbide economy trimmer.
- Ref. S48/39 & S48/40 for selfguiding 90° trimming only.
- Ref. S48/41 self-guiding at 83°.
- Ref. S48/42 is for trimming on a rebate. The guide length is
- Ref. S48/39 is a shorter version of Ref. S48/40.







Refs. S48/39 & S48/40



Ref. S48/41





Ref. S48/42






A Deg.	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
90°	6.3	10.0	38.0	S48/39	£26.47
90°	6.3	10.0	52.0	S48/40	£30.56
83°	6.3	6.0	38.0	S48/41	£26.47
90°	6.3	6.0	35.0	S48/42	£26.47

### **STC ECONOMY TRIMMER**


- Solid Tungsten Carbide economy trimmer.
- For use on short runs.
- Ref. S47/72 trims 90° or 45°.
- Ref. S47/70 trims 90° or 60°.
- Ref. S47/71 trims 90° or 83°.
- Will trim and bevel by changing cutter height.
- · Requires a side-fence or a copy follower guide on the router.

















A Deg.	A2 Deg.	D mm	C mm	C2 mm	OL mm	Product Ref.	Shank Dia.
45°	90°	6.3	6.3	3.2	38.0	S47/72	£26.47
60°	90°	6.3	6.0	6.0	32.0	S47/70	£29.24
83°	90°	6.3	5.0	4.5	38.0	S47/71	£26.47

### **COMBI TRIMMER**

- For trimming top & lip.
- Economical cutter, performs 3 functions:
- 1. To top trim the overlay at 90°.
- 2. To trim the overlay at 60°.
- 3. The base of the cutter can trim the vertical lipping at 90°.
- Requires side-fence or roller bearing.

D

mm

12.7





A2

Deg.

90°

Deg.

60°



С

mm

12.7

Product

Ref.

47/7
















### **BEARING GUIDED COMBI TRIMMER**

- Self-guided combination trimmer.
- A 90° trim is obtained by engaging the bottom half.
- A 45° trim is obtained by lowering the cutter.
- A fine height adjuster is recommended when using this cutter.
- A larger 20mm bearing will spread the wear to the cutting edges when 45° trimming.



Prod.

Shank Dia. 1/4

	Deg.	Deg.	mm	mm	mm	mm	mm	Ref.	1/4"
П	90°	45°	25.0	6.0	5.0	6.0	18.0	46/06	£52.80
A2 C3	REPL	ACEN	IENT E	BEAR	ING				
# \$ <b>1</b>	Bearin	ng 18.2	2mmØ					B182	£12.17
ALTERNATIVE BEARING									
○ ○ <del>-</del> B	Bearin	ng 20.0	OmmØ	to spr	read v	vear		B20	£11.06

C2 C3 В

A2

### **BEARING GUIDED** CHAMFER TRIMMER Cut a wider edge line, at 45° angle. · Two flutes for clean finish. D Α D С В Prod. Shank Dia. Deg. mm mm mm Ref. **46/6B** £48.71 45° 28.5 8.5 16.0 REPLACEMENT BEARING £4.64 Bearing 16.0mmØ **B16 ALTERNATIVE BEARING**

Bearing 19.0mmØ


### **BEARING GUIDED BEVEL TRIMMER**


• Five self-guided trimmers.

• Cut a wider edge line, at angles between 30° & 80°.

· Two flutes for clean finish.

A larger 19mm diameter bearing will spread the wear of the cutting edges for cutter Refs. 46/3 & 46/6A - 46/6C.





### REPLACEMENT BEARINGS

7.0


-	For 46/3, 46/6A-6C 16.0mmØ	B16	£4.64
Ī	For 46/6E-F 12.7mmØ	B127A	£5.18

16.0

46/6C £45.25

### **ALTERNATIVE BEARING**

For 46/3, 46/6A-6C 19.0mmØ	<b>B19</b>	£5.18




30° 28.0

### BEARING GUIDED DOUBLE TRIM

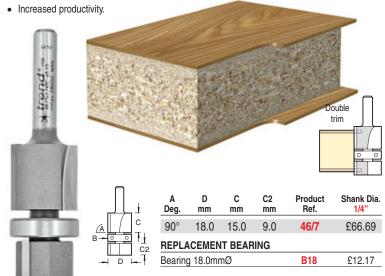· For trimming top and bottom surfaces simultaneously with bearing following the core.

· Two fluted.



### 90° TRIMMER

- Ref. 37/1 has three flutes and bevelled corners to prevent scoring. Ideal for flush trimming of hardwood or plastic edge strip to obtain fine finish. Use with a side-fence.
- Ref. 47/2 is for trimming the lipping of plastic overlay and for rebating and machining wood, Duralium and plastics.

A Deg.	D mm	C mm	Product Ref.	Shank Dia. 1/4"
90°	25.0	12.0	37/1	£58.35
90°	18.0	12.0	47/2	£43.03



B19

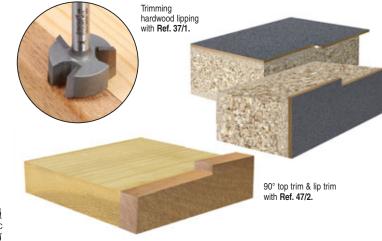
Ref. 37/1

with triple

flute


£5.18






# MILLING TOOLS TUNGSTEN CARRIED TUNGSTEN CARRIED TUNGSTEN CARRIED TUNGSTEN CARRIED

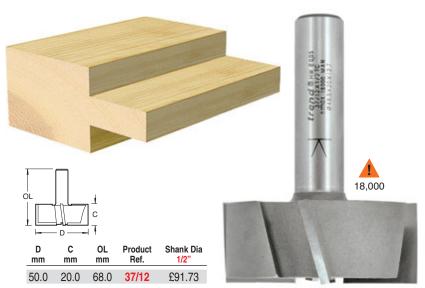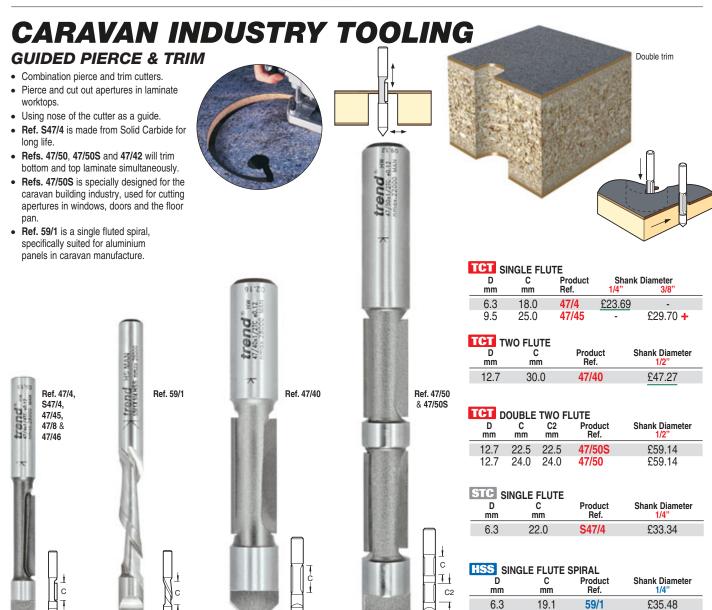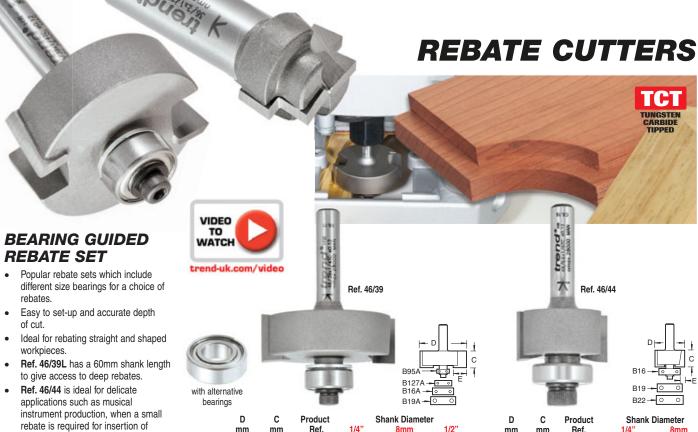
- Four fluted for a clean finish.
- Two down-shear blades for the shoulder and two up-shear for the face of the tenon.
- For abrasive materials, timber and manmade board.
- Improved finish on interlocking grain.











instrument production, when a small	D	С	Product	,	Shank Diameto	er	
rebate is required for insertion of	mm	mm	Ref.	1/4"	8mm	1/2"	
purfling.	35.0	12.7	46/39	£71.60	£71.60	£77.15	
When using bearing Ref. B95A, make		12.7	46/39L		271.00		
two passes if a full depth of cut is	35.0	12.7	46/39L	-	-	£86.93	
required by using a larger bearing first.							

### SUPPLIED WITH FOUR BEARINGS BELOW

Rebate E mm	Bearing Dia. mm	Product Ref.	Price	
7.9	19.0	B19A	£8.35	
9.5	16.0	B16A	£6.62	
11.1	12.7	B127A	£5.18	
12.7	9.5	B95A	£6.48	

### **ALTERNATIVE BEARINGS**

 bate E mm	Bearing Dia. mm	Product Ref.	Price	
2.5	30.0	B300A	£11.92	
5.0	25.0	B25A	£11.92	
6.0	23.0	B23A	£11.06	
7.0	21.0	B21A	£11.06	

### SUPPLIED WITH THREE BEARINGS BELOW

£66.03

£66.03

46/44

	Rebate E mm	Bearing Dia. mm	Product Ref.	Price
	1.0	22.0	B22	£11.06
	2.5	19.0	B19	£5.18
Ī	4.0	16.0	B16	£4.64

### **ALTERNATIVE BEARINGS**

12.7

mm 24.0

	Rebate E mm	Bearing Dia. mm	Product Ref.	Price
	2.0	20.0	B20	£11.06
	3.0	18.0	B18	£12.17
	3.5	17.0	B17	£11.92
	4.5	15.0	B15	£11.92
	5.0	14.0	B14	£11.92
	5.6	12.7	B127	£7.81
_				

MINIATURE BEARING

**GUIDED REBATER** 

### BEARING GUIDED LARGE REBATER

- Bearing guided for straight or curved work for portable Wand stationary routers.
- Supplied as standard with Ref. BR/191 fitted.

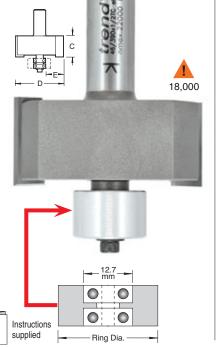
> Instructions supplied


· A variety of alloy bearing rings are available as accessories to give various rebate sizes. Rings are secured between the two bearings.

D	C	E	Product	Shank Dia.
mm	mm	mm	Ref.	1/2"
50.8	22.5	19.1 & 15.9	46/390	£89.71

### Alternative size rebates using alloy bearing rings below

Rebate E mm	Ring Dia. mm	Product Ref.	Price
3.2	44.4	BR/444	£8.35
4.75	41.3	BR/413	£8.35
6.35	38.1	BR/381	£8.35
9.5	31.7	BR/317	£8.35
12.7	25.4	BR/254	£5.96
14.3	22.2	BR/222	£5.96
15.1	20.6	BR/206	£5.96
15.9	19.1	BR/191	£5.96
17.45	15.9	BR/159	£5.96
18.25	14.3	BR/143	£5.96











# RECESSERS
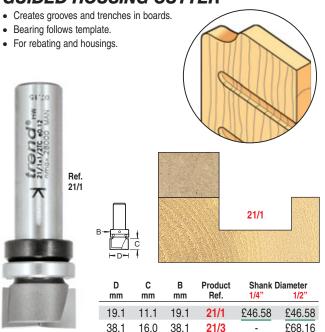
## SHANK MOUNTED BEARING GUIDED HOUSING CUTTER



# SHANK MOUNTED GUIDED MULTI-POINT LOCK SYSTEM RECESSER

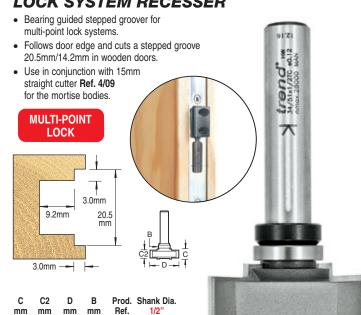


### STRIP RECESSER


- Four sizes of recessing cutters for producing double rebates.
- For producing recesses with a lower rebate.
- Designed to accept library/bookcase shelving strip.
   Ref. 36/19 is specifically designed for Tonk Strip.

D mm	D2 mm	C mm	C2 mm	Product Ref.	Shank D	iameter 1/2"
9.5	19.0	13.0	6.0	36/19	£55.58	£55.58
12.0	18.0	10.0	6.0	36/1	£45.94 +	-
13.0	19.0	10.0	6.0	36/10	£61.13 +	-






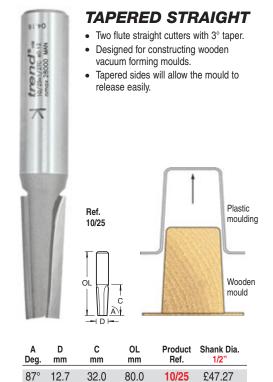20.5 14.2 43.4 19.0 **34/51** £84.82







### **JOINTING CUTTERS**



### BEARING GUID-ED FINGER JOINTER SET



Ref. 866 Finger Jointer combines an assembly of five TCT slotting cutters with an abutting-edge cutter to produce a profile that extends the glue line threefold, resulting in an extremely strong joint. It fits into any portable or stationary router with a 1/2" collet.

### Performing the cut

Timber must be machined square. The cutters should be assembled to match the spindle rotation, and be stacked at 90° to one another to ease stress on the tool.



### Timber thickness Min. 11.0mm (7/16") Max. 36.0mm (1-3/8")





Fitted with 5 cutters







В.	D mm	E mm	B mm	OL mm	Product Ref.	Shank Diameter 1/2"
	40.0	6.0	28.0	96.0	866	£106.04

# BEARING GUIDED COMB



This Comb Jointing Set can be fitted to all heavy duty routers mounted in a fixed head position. It comprises a set of five 4mm kerf, TCT groovers, mounted on an arbor and three ball bearings. These offer alternative cutting depths and provide a self-guiding facility.

The Comb Jointer is ideally suited for producing small boxes, instrument cases etc.

Please note, timber ends must be cut square.





_	C B	OL mm	Product Ref.	Shank Diameter 1/2"			
47.6 4	.0 28.0	96.0	876	£134.02			
Timber Thickness							
Bearing 34r	nmØ up t	o 6.5mm	BB34	£14.96			
Bearing 29r	nmØ 6.6n	nm to 9.0mm	BB29	£14.96			
Bearing 28r	nmØ 9.1r	nm to 9.5mm	BB28	£14.96			
Spacer 8mr	n bore x 5.3	mm thick	SPAC/8/53	£1.84 (each)			

### BEARING GUID-ED FINGER JOINTER SET 865

A bearing guided reversible finger jointer, to increase the gluing area for edge to edge joints.

**Timber thickness** 








mm	mm	mm	Ref.	1/4"
24.6	18.5	12.7	865	£66.03

### OFFSET TONGUE & GROOVER

A heavy duty reversible finger jointer, to increase the gluing area for edge to edge joints.

Timber










mm_	mm	mm	Product Ref.	Shank Dia.
47.5	37.0	30.0	87/01	£77.03 +





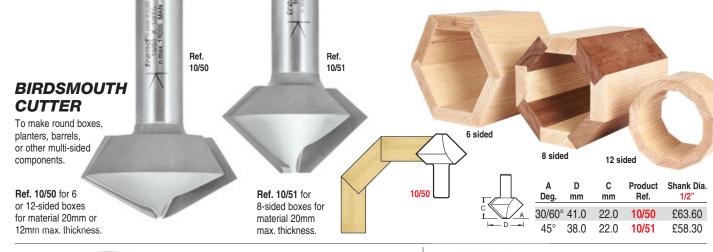

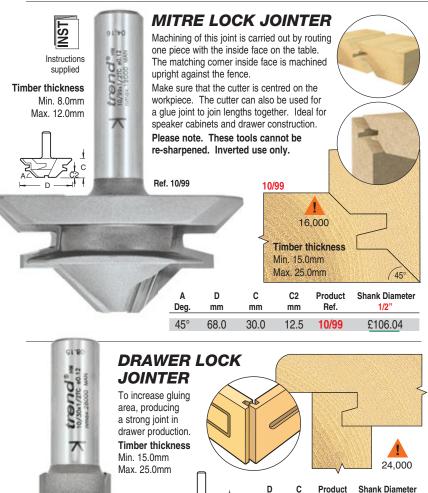

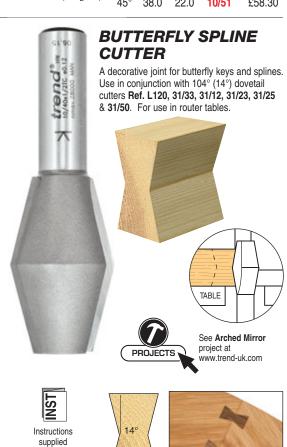



24,000

Cutters to create knuckle joints for gate leg tables. The cutter should be used in a router table. Hand tools will be required to finish the joint.

mm


25.4

mm

12.7


### Timber thickness:

**Ref. 9/41** For 14.0mm to 15.0mm. **Ref. 9/42** For 19.0mm.



9/42

R9.5



	₽ B						
A Deg.	R mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"	
45°	7.14	23.8	17.0	9.5	9/41	£35.66 +	

Ref.

10/30

1/2

£41.02



С

mm

44.0

D

mm

28.5

Dea

104°

Product Shank Dia.

1/2

£68.82

Ref.

10/40





## **CHAMFER & 'V' GROOVE**



# THREE FLUTE ENGRAVER

Cuts cleanly without feather edging. Solid Carbide for long life. Cuts to a fine 'V' groove point. Ideal for sign writing.





A	D	C	C2	Product	Shan	k Diameter	
Deg.	mm	mm	mm	Ref.	1/4"	8mm	
60°	14.5	12.5	14.5	S11/11	£59.81	£59.81	

### STC ENGRAVER

Solid Carbide for long life. Ideal for engraving and veining work.



82.5°

S11/01

Ref. S11/01

П	
C <sub>2</sub> C	
TVAL	1

A Deg.	D mm	C mm	C2 mm	Product Ref.	Shani 3mm	k Diameter 1/4"
60°	6.3	6.0	6.0	S47/70		£29.24
82.5°	5.0	15.0	16.0	S11/01	-	£43.15

S47/70


(60°

### CHAMFER 'V' GROOVE

Use for bevelling, chamfering and for producing mortar grooves.

Approx. 1.0mm flat will be found on nose.

Ref. 11/3 is ideal for imitating 'V' jointed






'V' jointed

Ref.

11/20

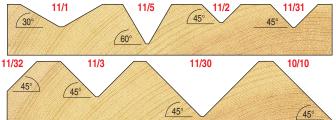В





A Deg.	D mm	C mm	C2 mm	Product Ref.	1/4"	hank Diamete 8mm	er 1/2"
Dcg.		111111	111111	1101.	1/1	Ollilli	1/2
30°	22.0	6.0	12.0	11/1	£37.57	-	£37.57
60°	12.7	10.3	11.9	11/5	£29.24		£29.24
45°	11.0	5.0	7.0	11/2	£36.14	-	£34.39
45°	12.7	6.5	9.0	11/31	£26.47	-	£26.47
45°	16.5	8.0	11.0	11/32	£28.37	-	£28.37
45°	19.1	9.2	13.0	11/3	£31.36	£31.36	£31.36
45°	27.0	13	18.0	11/30	£59.55	-	£56.70
45°	32.0	15.0	21.5	10/10	-	-	£57.03
45°	38.0	19.0	26.5	10/11	-	-	£54.24
45°	51.0	25.0	35.0	10/12	-	-	£95.43

### SHANK MOUNTED BALL BEARING CUTTER

Follows template mounted on board surface.

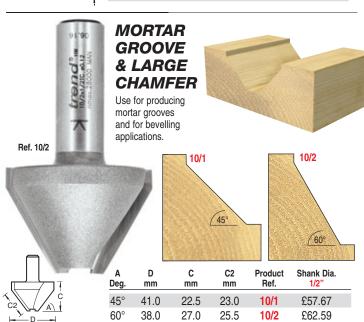
Template should be at least 5mm thicker than cutter cut length. Approx. 1.0mm flat will be found on nose.



Decorative fluting following a template.


11, 60°	/20	45	11/40		11/41	
Α.			В	Duaduat	Chank Diameter	

П	Deg.	mm	mm	mm	Ref.	1/4"	1/2"
-   -	60°	12.7	16.0	12.7	11/20	£40.37	-
- <u></u>	45°	12.7	12.7	12.7	11/40 11/41	£35.46	-
AV_C	45°	19.1	16.0	19.1	11/41	-	£37.83 +
ī							



### **BEARING GUIDED 45° CHAMFER**

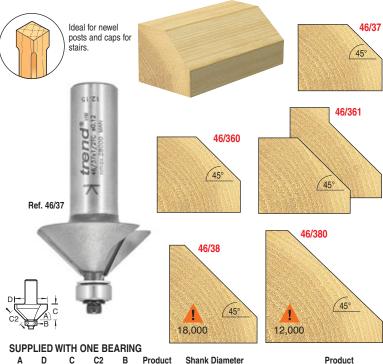A range of guided chamfering cutters. Ref. 46/361 is supplied with a nylon sleeved bearing and can be used on solid surface material to give a 14.3mm chamfer width. A smaller bearing accessory can be fitted to increase chamfer width.



A Deg.	D mm	C mm	C2 mm	B mm	Product Ref.	Shank I	Diameter 1/2"	
45°	31.8	12.0	16.0	9.5	46/37	£63.24	£63.24	
45°	35.1	12.0	16.0	12.7	46/360	£75.82	£75.82	
45°	41.3	20.0	19.0	12.7	46/361	-	£76.02	
$45^{\circ}$	50.0	19.0	26.0	12.7	46/38	-	£82.05	
45°	76.2	25.4	35.0	25.4	46/380	-	£129.47	

D



### 45° С В OL Product Shank Dia. mm mm mm mm £27.79 14.3 6.35 4.8 47.0 MB/05 Miniature bearing has limited life.

### **PIN GUIDED** CHAMFER/BEVEL

Deg.


**BEARING** 

**CHAMFER** 

**GUIDED 45°** 

For a neat chamfered edge.






A	C	C2	P	Product	Shank Dia.
Deg.	mm	mm	mm	Ref.	1/4"
45°	10.0	14.0	5.5	10H/1	£45.25

### **BEARING GUIDED** 45° 3 FLUTE **CHAMFER** For use on wood





() 新新元					
A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
45°	34.0	11.0	12.7	41/5	£54.24

# BEARING **GUIDED BEVEL** This guided tool is supplied with two bearings. The larger bearing removes the flat. 25° with alternative bearing

### SUPPLIED WITH TWO BEARINGS

A Deg.	D mm	C mm	C1 mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"	
25°	41.0	13.0	5.0	13.0	12.7&19.0	46/34	£60.48	


### **BEVEL CUTTER**


Useful for bevelling thick timbers. Certain sizes can be used for jointing, boxes, pilasters and carcassing. Ref. 11/17 is ideal for use by wood turners with smaller routers to create staves on 25mm stock. For full bevels a template should be fitted to component.




08 08










75°

design



70°

	ט
C2 C A	8 7 6
	U

A Deg.	D mm	D2 mm	C mm	C2 mm	B mm	Product Ref.	Shank Dia. 1/2"
80°	26.0	12.7	35.0	36.0	12.7	46/103	£75.82
75°	30.0	12.7	35.0	36.0	12.7	46/104	£82.05
70°	35.0	12.7	35.0	38.0	12.7	46/105	£82.05
60°	53.0	12.7	35.0	40.0	12.7	46/106	£109.84
67.5°	42.0	12.7	35.0	38.5	12.7	46/107	£82.05

	WITHOUT	BEARING
	Α	D
\\ //:	Dea	mm

11	WITHOUT BEATING							
	A Deg.	D mm	C mm	Product Ref.	Shank Dia. 1/4"			
<u>A</u> <u></u> □ ⊢	67.5°	28.0	28.0	11/17	£58.35			

### **DOVETAIL CUTTERS**





Pugit K

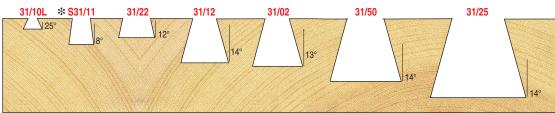
### **DOVETAIL CUTTER**

For dovetail joints and sliding dovetails. To suit user preference, the table shows angles from the horizontal and the profiles show angles from the vertical.

For use with Trend Dovetail Jig DJ300.



Α	D	D	С	OL	Product	Shank	Diameter
Deg.	mm	inch	mm	mm	Ref.	1/4"	1/2"
115°	5.0	-	3.0	61.0	31/10L	£35.46	-
98°	6.0	-	6.9	63.0	S31/11 *	£26.52	+
102°	9.5	3/8	8.5	54.0	31/22	£36.18	+
104°	12.7	1/2	10.0	60.0	31/12	-	£29.12
103°	13.2	-	13.0	55.0	31/02	£34.14	-
104°	19.1	3/4	19.1	66.0	31/50	-	£36.40
104°	25.4	1	25.4	69.0	31/25	-	£38.36 4





## STAIR HOUSING DOVETAIL CUTTER

Purpose made for stair housing jigs. Ensures tight fit of tread in string on face edge.


Refs. 32/11 and 32/13 are available in left hand (LH) and right hand (RH) rotation. RH cutters are also used with Trend Stair Jins

Please state LH or RH when ordering.

### Trend Stair Jig Ref. STAIR/A

Recommended cutters for tread thickness: 22mm (7/8") Ref. 32/10X1/2TC 25.4mm (1") Ref. 32/11X1/2TC 28.5mm (1-1/8") Ref. 32/12X1/2TC 32mm (1-1/4") Ref. 32/13X1/2TC

	Deg.	mm	inch	mm	mm	Ref.	Rotation	1/2"
Π	95°	14.0	-	20.0	65.0	32/10	RH	£57.67
Щт	95°	16.0	5/8			32/11	RH	£57.67
,     c	95°	19.0	3/4	25.5	65.0	32/12	RH	£59.81
(A   _ 1   1   1   1   1   1   1   1   1	95°	22.0	7/8	25.5	65.0	32/13	LH	£69.47
	95°	22.0	7/8	25.5	65.0	32/13	RH	£59.81
	95°	25.4	1	25.4	65.0	32/14	RH	£53.96 +









32/10		32/11		32/12	
	5°		5°	A CONTRACTOR OF THE CONTRACTOR	5°



### **DC400 JIG DOVETAIL CUTTER**

Cutters for use with the **Trend DC400 Dovetail Jig** (now discontinued). These cutters have extra long shanks.

A Deg.	mm	mm	mm	Product Ref.	1/4" 8mm
110°	11.3	6.35	56.0	31/34	£21.07 + £21.07 +
104°	11.3	9.5	59.0	31/33	£21.07 + £21.07
101°	11.3	13.0	63.0	31/32	£22.20 + £22.20 +
99°	11.3	16.0	66.0	31/31	£22.20 + £22.20 +
97°	11.3	19.0	59.0	31/30	£22.20 + £22.20 +

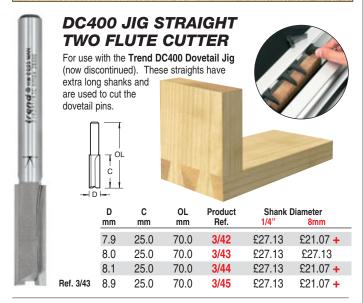
### **SET OF SEVEN CUTTERS**

31/30


Comprising 31/30, 31/31, 31/32, 31/33, 31/34 and two 3/43.

			Diameter	
_	Product Ref.	1/4"	8mm	
	SET/DC1	£74.12 +	£74.12 +	
_	31/34		31/33	Decree of the later of the late
		\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		
			14°	
l D				
	31/31		31/30	





### **BROOKMAN™ CUTTER**

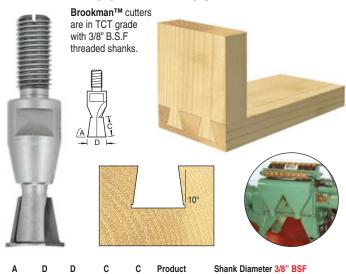

Ref

1 off

15 off


£50.82 £732.26 £1,210.86

### LEIGH™ JIG DOVETAIL CUTTER

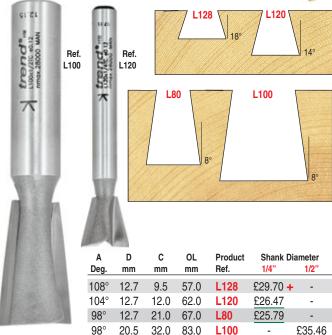Cutters for use with the **Leigh Dovetail Jig.** These cutters have extra long shanks.

Ref. L120 can also be used with Trend Jig DJ300 (now discontinued) and DeWalt DE6251 jigs.









mm

11.9

inch

15/32

Deg.

inch


100° 9/16 14.3

mm

25 off

### **OVOLO & ROUNDING OVER**



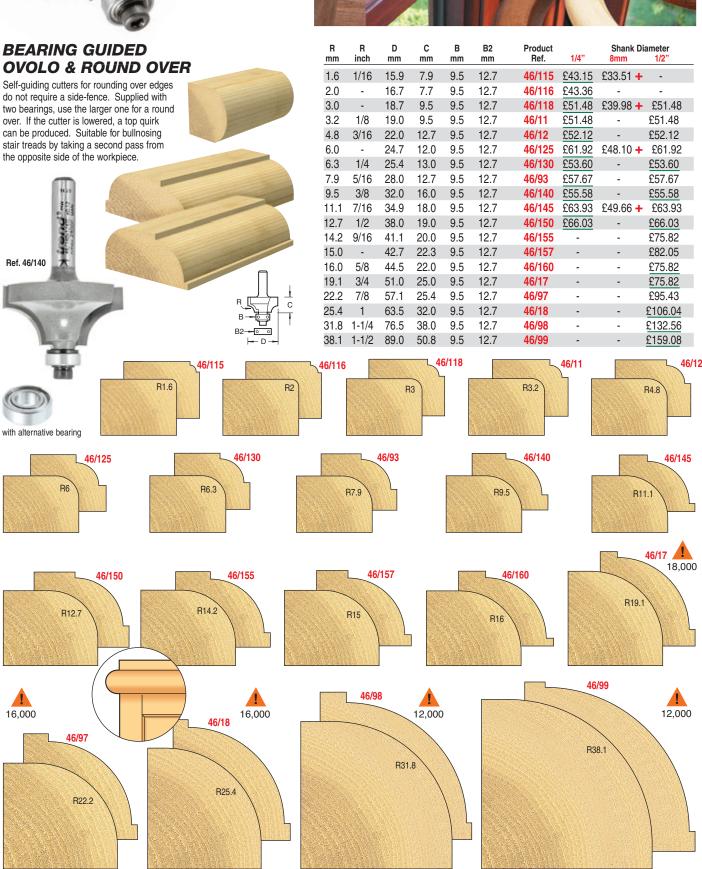

### **BEARING GUIDED** LARGE STEP OVOLO & ROUNDING OVER


Supplied with alternative bearings to produce a rounding over and two sizes of ovolo moulding. The smaller bearing gives a 3.2mm quirk.




R mm	R inch	D mm	C mm	B mm	B2 mm	B3 mm	Product Ref.	Shank E	Diameter 1/2"
6.3	1/4	28.7	13.0	9.5	12.7	16.0	40/13	£56.37	£56.37
9.5	3/8	35.0	16.0	9.5	12.7	16.0	40/14	£57.67	£57.67
12.7	1/2	44.0	19.0	9.5	12.7	16.0	40/15	-	£66.03
15.9	5/8	48.0	22.0	9.5	12.7	16.0	40/16	-	£75.82


**3 BEARINGS** 








£47.27





# **FLAT OVOLO** Ref. 46/41


## The bearing guided flat ovolo gives an attractive edging effect. The non-bearing version is ideally suited for false panel work.



7/01

BEARING GUIDED  R D C B Product Shank Diameter mm mm mm mm Ref. 1/4" 1/2"										
	30.0	10.0	0.5	46/41		£55.58				
12.0	30.0	10.0	9.5	40/41	100.00	100.00				
WITHO	UT BE	ARING	ì							
R D C Product Shank Dia. mm mm mm Ref. 1/4"										









### **OVOLO & ROUNDING OVER**

12.0


25.0

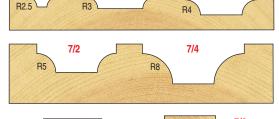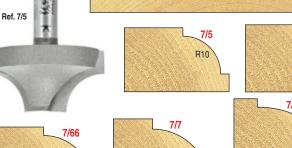Some ovolo cutters can be used with radius cutters, to make rule joints. Ref. 7/01 has an extra long shank of 40.0mm.








	7.5	7/8 16,000
7/66	7/7	R20
R12.7	R15	





R	R	D	С	Product	Shank D	
mm	inch	mm	mm	Ref.	1/4"	1/2"
2.5	3/32	9.5	9.0	7/01	£27.79	-
3.0	-	18.0	10.0	7/1	£39.70	-
4.0	-	19.0	11.0	7/10	£39.70	-
5.0	-	22.0	12.0	7/2	£53.60	£53.59
8.0	5/16	28.0	15.0	7/4	-	£59.81
10.0	-	31.0	16.0	7/5	£65.36	£66.69
12.0	-	35.0	17.0	7/6	-	£66.69
12.7	1/2	38.0	18.0	7/66	-	£66.03
15.0	-	41.0	20.0	7/7	-	£71.60
20.0	-	60.0	27.0	7/8	-	£79.52

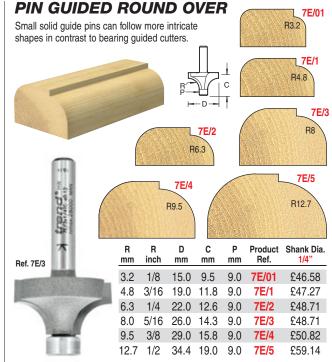


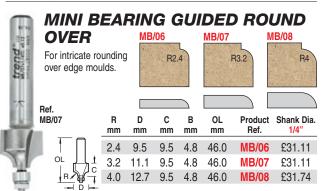


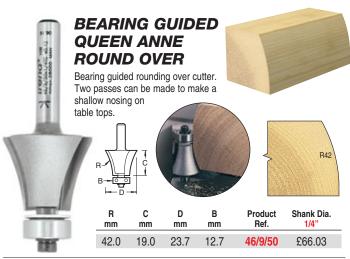


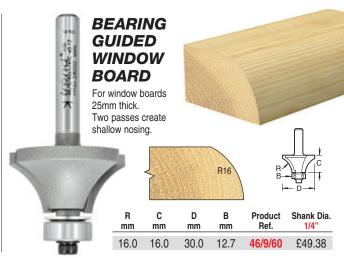

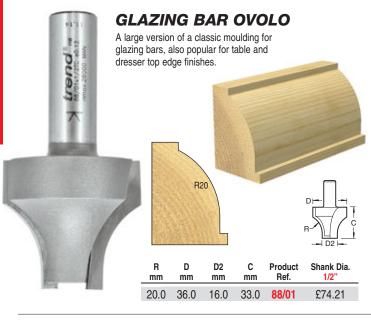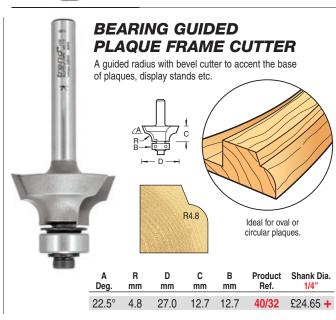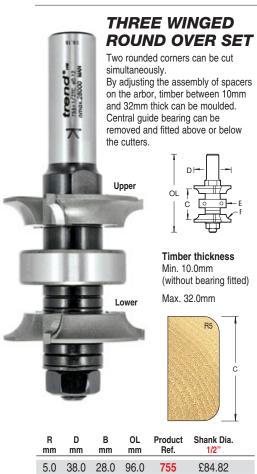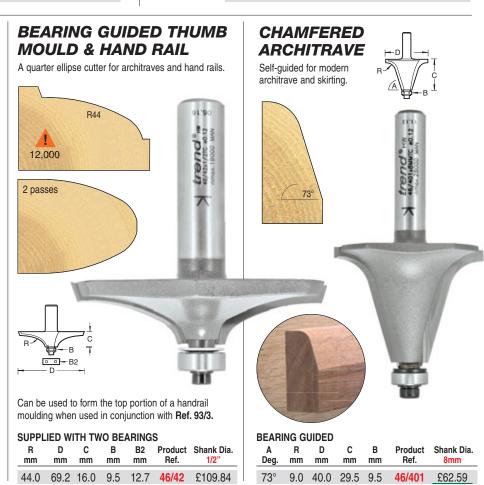









### OVOLO SHOULDER SCRIBE & PROFILE SET

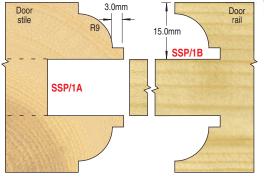
For door and window construction, decorative panelling and many other joinery applications. All these cutters have 1/4" (6.35mm) shanks and are available as sets.





Ref. SSP/1B

Ref. SSP/1A



R

mm

9.0

9.0

n

mm

33.5

36.7

Set comprising above

	D		sets below
C mm	B mm	Product Ref.	Shank Dia. 1/4"
9.0	9.5	SSP/1A	-
9.0	12.7	SSP/1B	-

Instructions supplied for

all cutter


Above suitable for 44.0mm timber thickness.


Set c	omprisi	ng abo	SSP/3	£122.00		
6.0	30.7	6.0	12.7	SSP/3B	£61.80 +	
6.0	27.5	6.0	9.5	SSP/3A	£61.80 +	•

Above suitable for 35.0mm timber thickness.

### **GLAZING BAR SET**

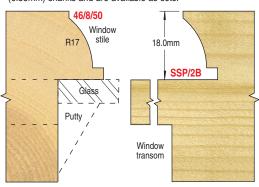For door and window construction, decorative panelling and many other joinery applications. All these cutters have 1/4" (6.35mm) shanks and are available as sets.









R mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
17.0	27.0	17.0	9.5	46/8/50	£75.82
17.0	31.0	13.0	12.7	SSP/2B	-
Set	compris	ing abo	SSP/2	£122.00	

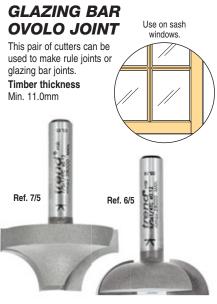Above suitable for 44.0mm timber thickness.






10.0


30.0


10.0


6/5

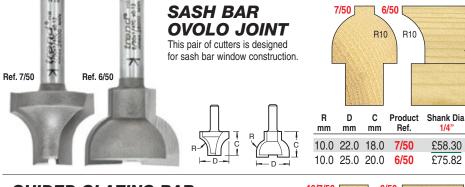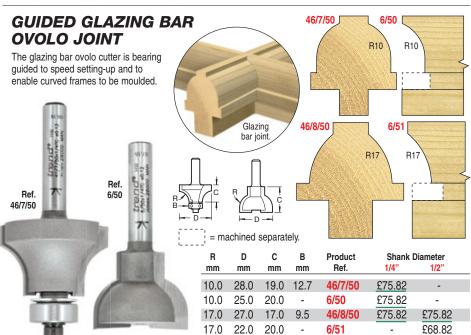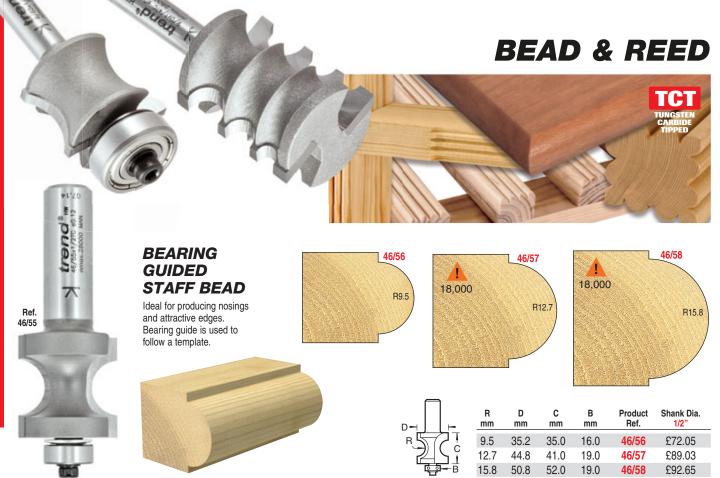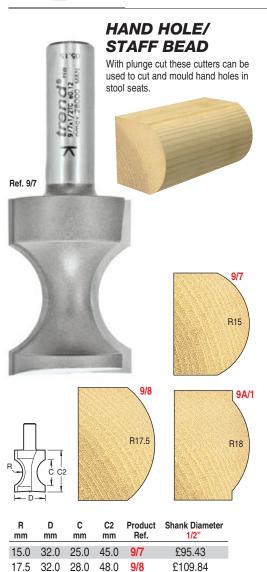£66.17










9A/1

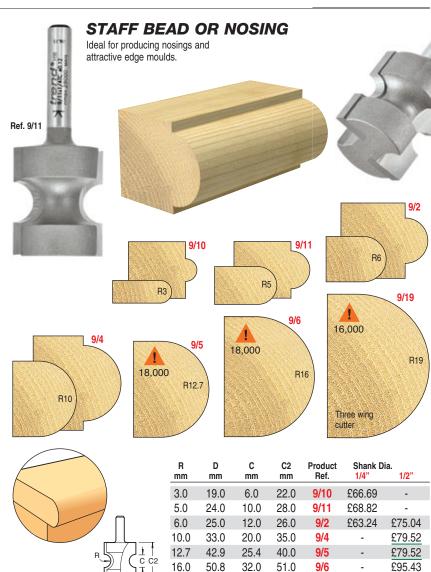£76.49



19.0

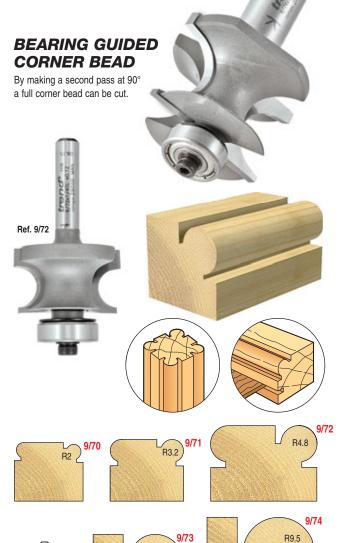
60.2

50.8


9/19


£126.25


38.0




R	R	D	D2	В	Product	Shank I	Diameter
mm	inch	mm	mm	mm	Ref.	1/4"	1/2"
2.0	5/64	23.0	20.0	16.0	9/70	£57.67	-
3.2	1/8	22.0	18.9	12.7	9/71	£57.67	-
4.8	3/16	28.0	25.7	16.0	9/72	£70.93	£70.93
7.0	-	31.9	28.6	16.0	9/73	£78.60	£78.60
9.5	3/8	38.1	34.7	16.0	9/74	-	£83.35

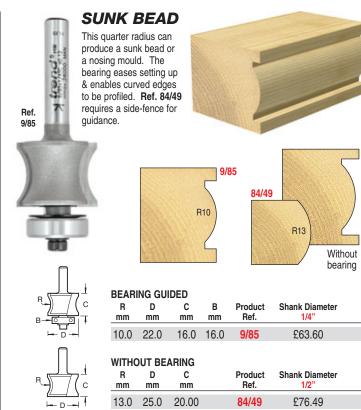

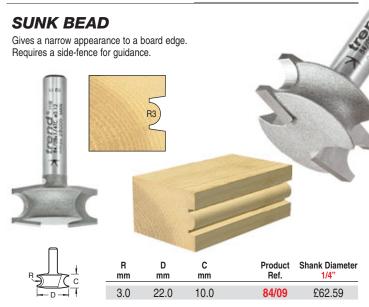

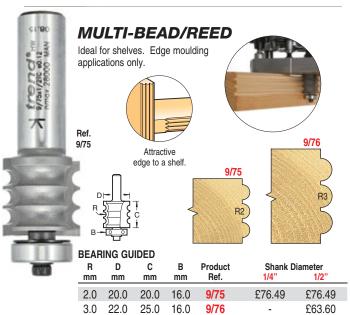

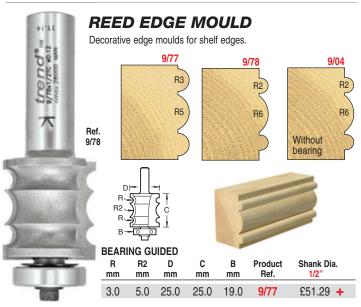














					Ref.	1/2"	a. 
25.5	2.5	25.4	22.0	16.0	9/88	£49.40	+
10.5	5.0	25.4	22.0	16.0	9/87	£49.40	+

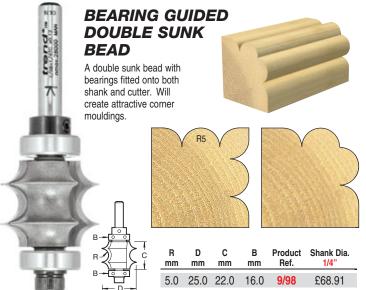

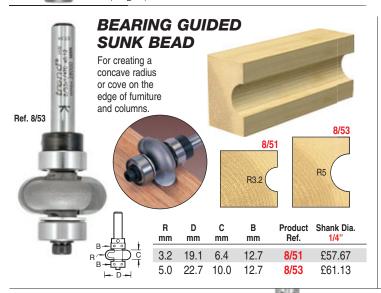

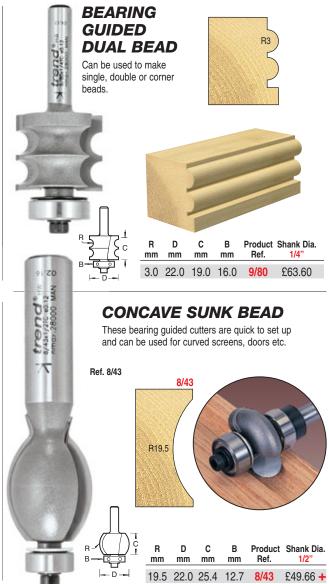



	R	D	C	Product	Shank Dia.
	mm	mm	mm	Ref.	1/2"
R C C	5.0	30.0	10.0	86/05	£79.93


## BEARING GUIDED RADIUS SUNK BEAD

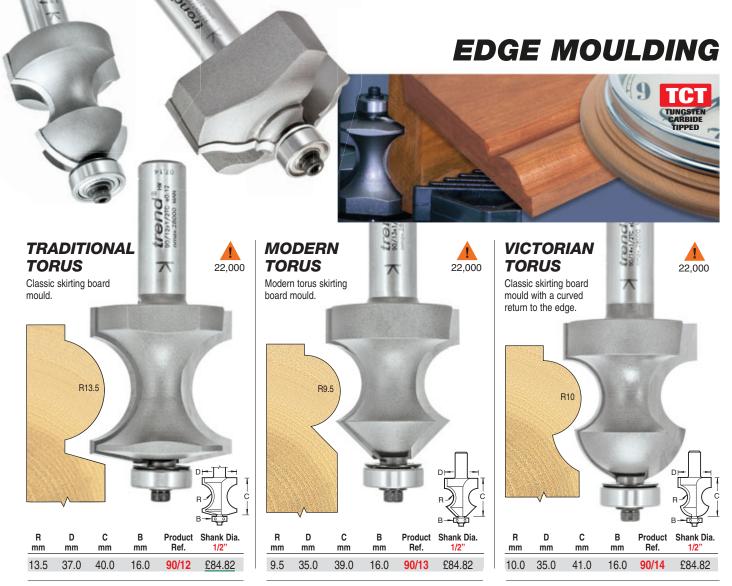
Cutters with guide bearing reduce setting up time for curved workpieces.

R mm	D mm	B mm	Product Ref.	Shank Dia. 1/4"
4.0	20.7	12.7	8/20	£62.59
6.0	24.7	12.7	8/21	£68.82










### **CORNICE CUTTER**

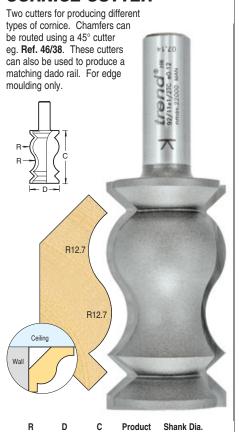

mm

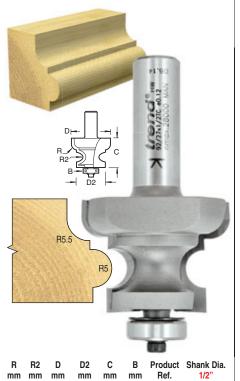
58.0

Ref.

92/11



Classic cutters for bolection moulds, used on panelled doors or heavy cornice work. Also for architraves, framing as well as edge moulding.



5.5 5.0 40.0 26.0 30.0 16.0 **92/27** £65.88 +

### ROMAN OGEE **EDGE MOULD**

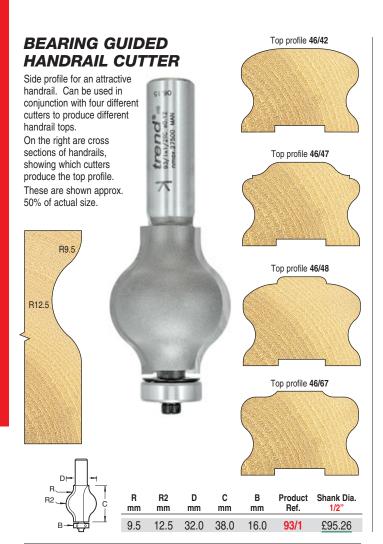
Ideal for edging traditional picture frames, mirrors, clocks and plaques.

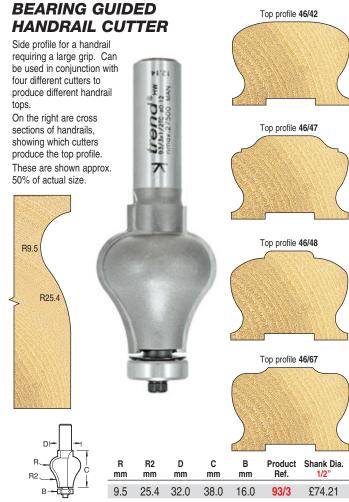


mm

12.7

£63.60







### BEARING GUIDED MULTI-MOULD

The whole profile edge of the cutter can be used for skirting boards and period style finishes in furniture.

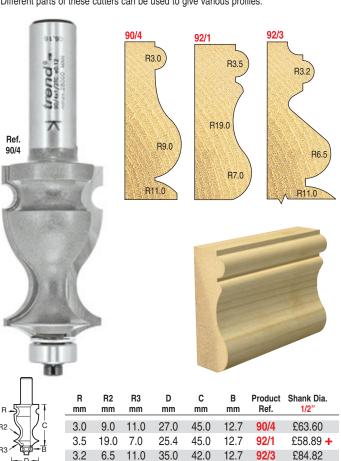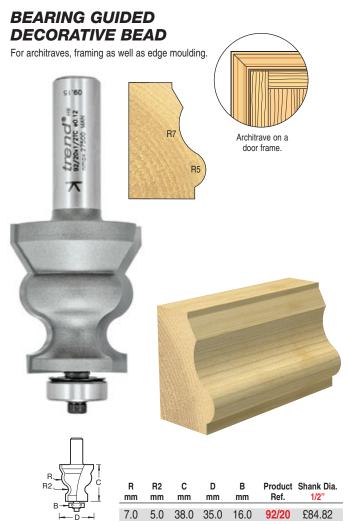Different parts of these cutters can be used to give various profiles.








### SHANK MOUNTED BEARING **WATER CHANNEL**

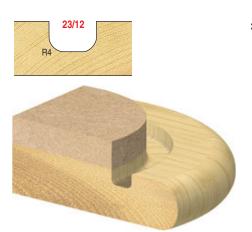
These water channel cutters produce radiused rebates and grooves. Suitable for plunge cutting. Self guiding.







С







### **DRAWER PULL RADIUS**

The long cut depth of these cutters allows them to produce under-cut finger grooves.









	mm	mm	mm	Ref.	1/2"
( / J ¢	11.1	22.2	31.7	13/4	£83.35
-D-I	12.5	25.0	32.0	84/83	£74.21


### DRAWER PULL CUTTER


An initial cut with a straight cutter is required to produce the effect shown.


For Ref. 84/96 use in two passes from left and right to cut a protruding grip handle.















	mm	mm	mm
П	1.5	2.0	22.0
	4.0	-	19.0
	5.0	2.0	45.0
R2-C C	6.0	-	38.0
⊢-D  ' ├ D2	8.0	2.0	44.8


R mm	R2 mm	D mm	D2 mm	C mm	Product Ref.	Shan 1/4"	k Dia. 1/2"
1.5	2.0	22.0	-	17.0	84/96	-	£84.82
4.0	-	19.0	-	13.0	84/94	£84.82	-
5.0	2.0	45.0	24.0	17.0	84/93	-	£116.65
6.0	-	38.0	22.0	17.0	84/95	-	£95.43
8.0	20	44 8	24.0	25.4	84/92	-	£106.04

## **RADIUS & COVE**





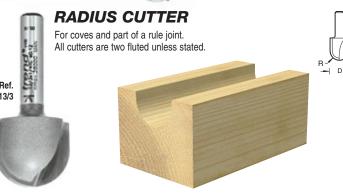





### **COMPLETE ROUTING BOOK**

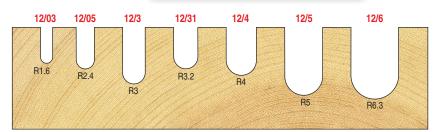
An essential read for all router users. Written by Alan Holtham. See page 182 for full details.

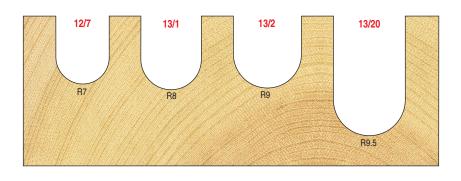
Product Ref. **BOOK/CR** 

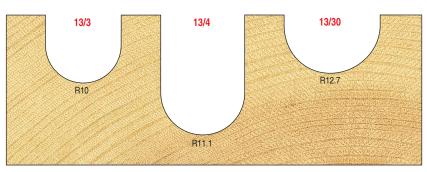


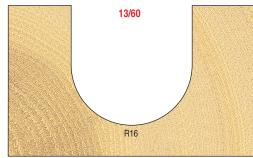
R mm	R inch	D mm	C mm	Product Ref.	1/4"	Shank Diam 3/8"	eter 1/2"
1.6	1/16	3.2	9.5	12/03	★£29.90	-	-
2.4	3/32	4.8	11.0	12/05	★£32.03	-	-
3.0	-	6.0	15.0	12/3	£33.81	-	-
3.2	1/8	6.4	11.0	12/31	★£34.14	-	-
4.0	-	8.0	12.7	12/4	£35.46	-	-
5.0	-	10.0	18.0	12/5	£37.57	◆£29.70	+
6.3	1/4	12.7	19.0	12/6	£50.82	-	£48.04
7.0	-	14.0	18.0	12/7	£45.92	-	£45.92
8.0	5/16	16.0	19.5	13/1	£53.60	-	£53.60
9.0	-	18.0	19.0	13/2	£56.37	-	£56.37
9.5	3/8	19.1	31.7	13/20	-	-	£72.24
10.0	-	20.0	18.0	13/3	£61.13	-	£61.13
11.1	7/16	22.2	31.7	13/4	-	-	£83.35
12.7	1/2	25.4	15.9	13/30	-	-	£66.03
16.0	5/8	32.0	31.7	13/60	-	-	£84.16
19.1	3/4	38.1	31.7	15/1	-	-	£84.82
25.4	1	50.8	31.7	15/2	-	-	£95.43

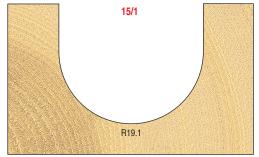
★ Solid Carbide insert ◆ Single flute

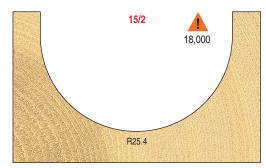


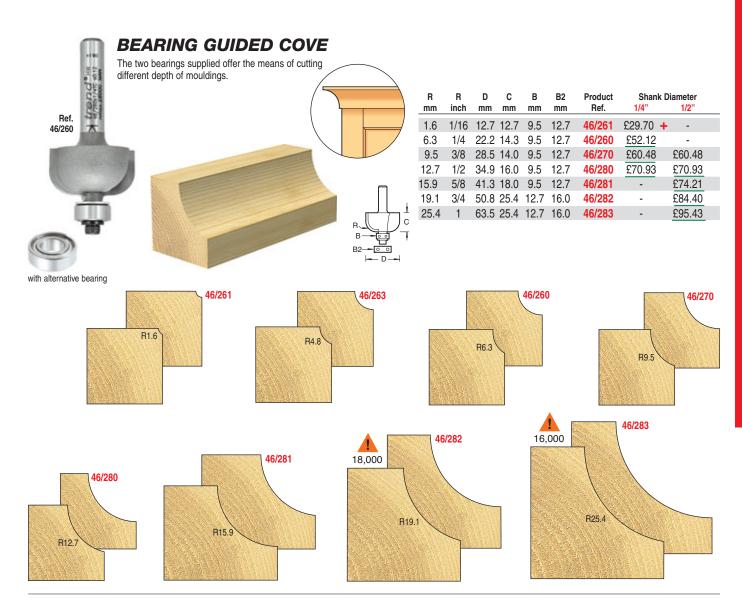


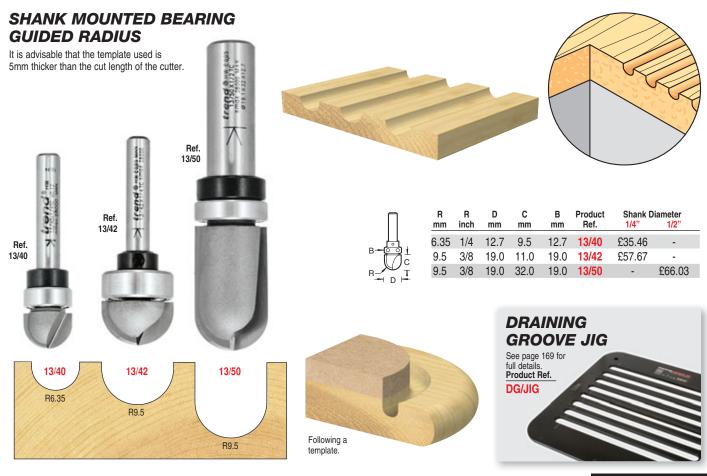













45

## **OGEE & CLASSIC MOULD**



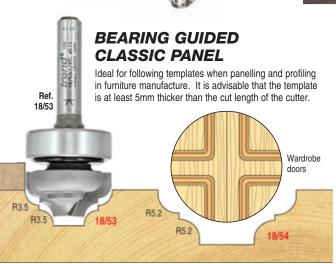
**BEARING** 


**GUIDED OGEE** 





P. Buen

	R mm	D mm	C mm	B mm	Product Ref.	Shank 1/4"	Diameter 1/2"
B	3.5	22.0	10.0	22.0	18/53	£59.81	-
RC C	5.2	35.0	14.0	35.0	18/54	-	£77.80

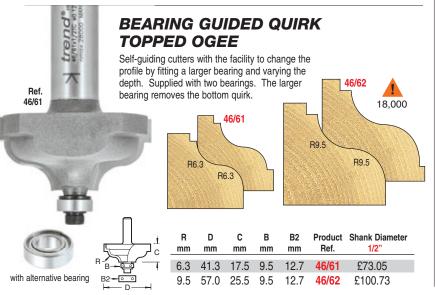


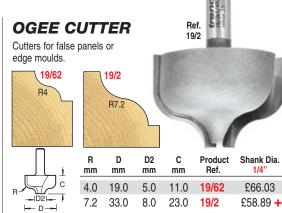


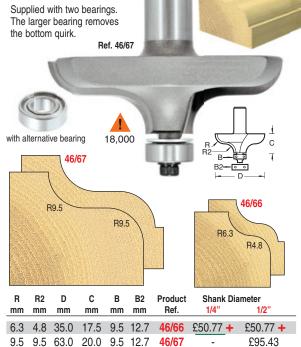

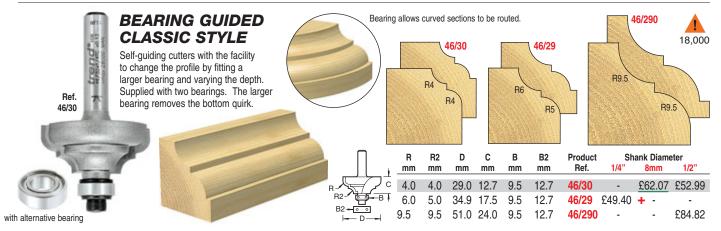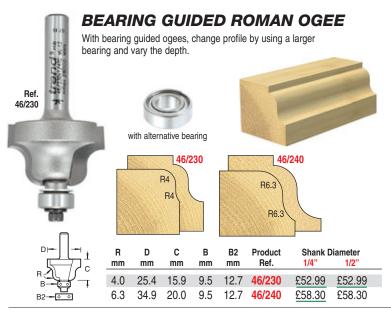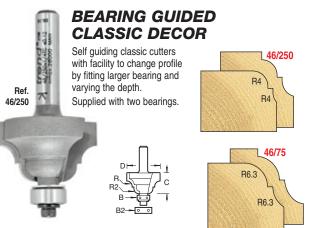











R mm	R2 mm	D mm	C mm	B mm	B2 mm	Product Ref.	Shank 1/4"	Diameter 1/2"
4.0	4.0	25.4	16.0	9.5	12.7	46/250	-	£41.16 +
6.3	6.3	35.0	22.0	9.5	12.7	46/75	£45.28 +	£58.30

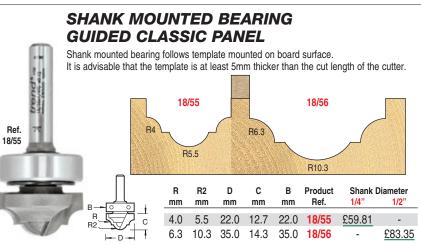

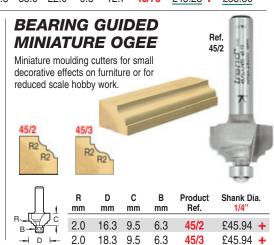


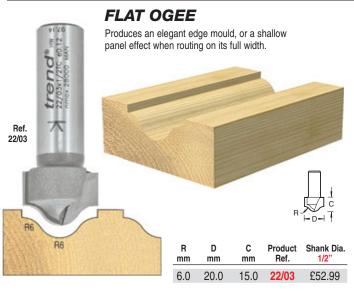


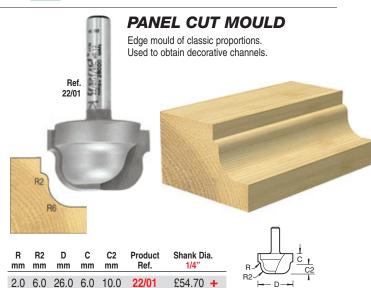













	R mm	R2 mm	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/2"
Ī	10.5	6.5	63.0	20.0	12.7	46/47	£102.95
	7.5	6.1	58.0	23.0	12.7	46/49	£102.95 +

# **PROFILE SCRIBING** VIDEO TO


### COMBINATION


- The classic method of producing cabinet panelled door and drawer fronts is made easy with these Profile Scriber sets.
- With the combination type, components are re-arranged on the arbor to cut the profile or the scribe.
- The Easyset system works by altering the height of the cutter. See opposite page for full details.
- For a range of complimentary panel mould cutters please see pages 50-51 for Raised Panel Moulding.





The Scribe






NST


Instructions supplied

**BEARING GUIDED CLASSIC** SET Ref. PSC/2 Set-up for scribing.



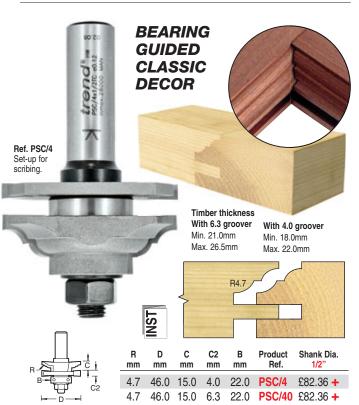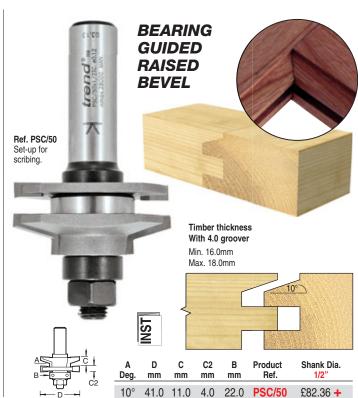INST В C C2 Product Shank Dia. Ref. mm mm mm mm mm 46.0 15.0 4.0 22.0 £82.36





### **EASYSET**

All in one system for quick setting.

- These tools produce the same type of joint and use the same components as the combination PSC sets.
- Both parts of the joint are cut by only changing the cutter height.
- No re-assembly of parts is required to convert the tool from scribing mode to profiling mode and vice-versa.

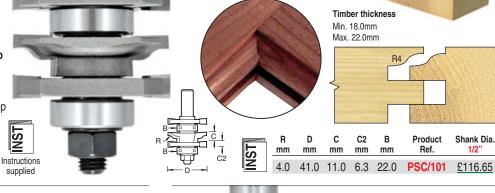


When using PSC sets at the minimum material thickness, the height of the top quirk may be reduced.




Router table use only.








**BEARING GUIDED** 

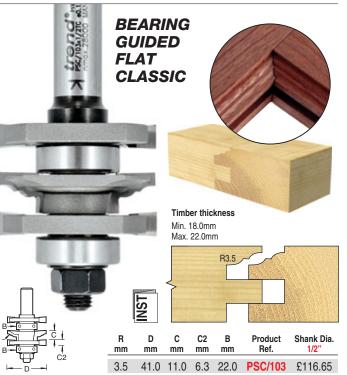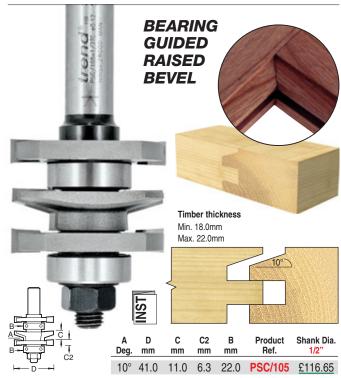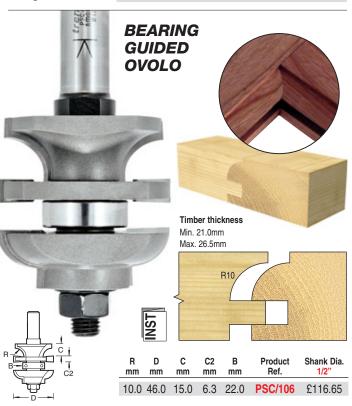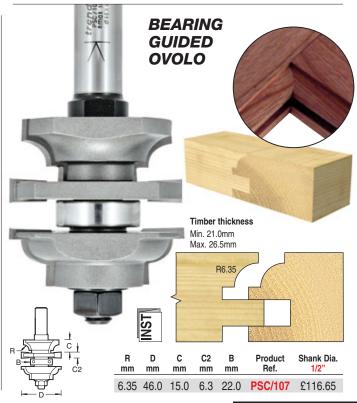**CLASSIC SET** 












## RAISED PANEL MOULDING VIDEO TO WATCH trend-uk.com/video • Traditional panels and frame doors, formerly machined on spindle moulders, can now be produced using heavy duty routers mounted in fixed positions, either overhead or inverted. • These raised panel cutters run best at lower speeds and match our range of profile scribers. · All suitable for use on natural timber and MDF. Router table or overhead router use only.

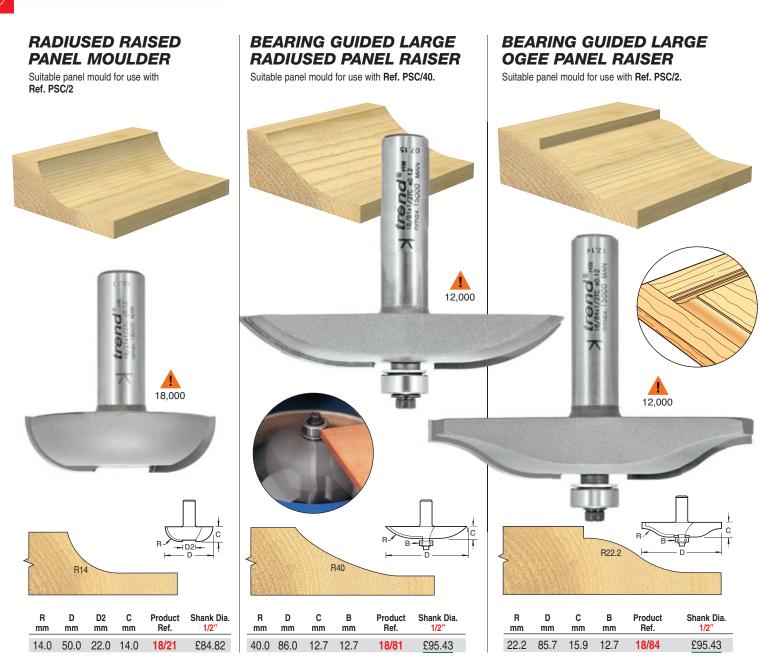

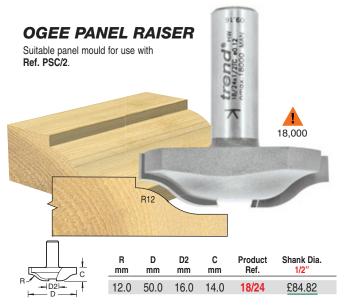


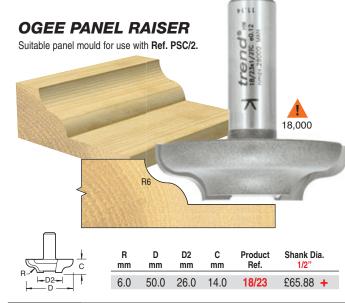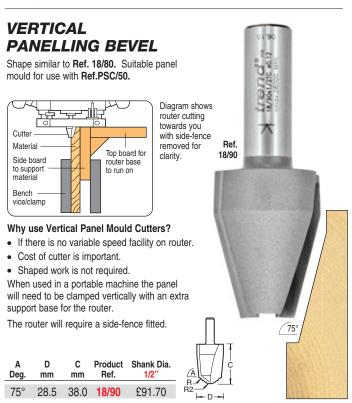







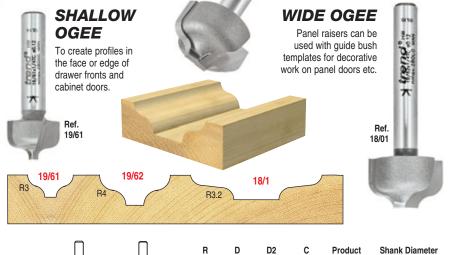


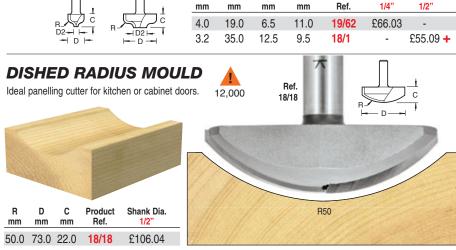


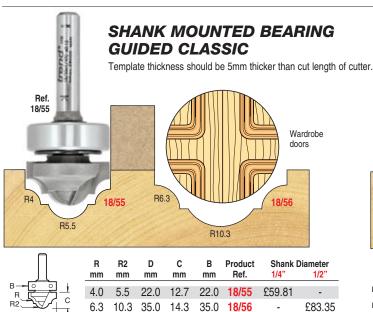


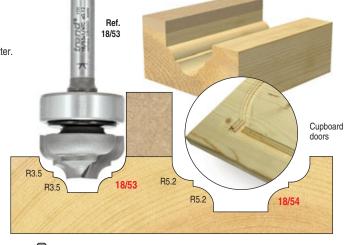













	R mm	D mm	C mm	B mm	Product Ref.	Shank D	iameter 1/2"
B-EFF L	3.5	22.0	10.0	22.0	18/53	£59.81	-
R _ D _ I	5.2	35.0	14.0	35.0	18/54	-	£77.80



Flat roman ogees, for raised panelling or edge moulding. Used for decorative capping on hand rails.




18,000

Ref.

22/1

R mm	R2 mm	D mm	C mm	C2 mm		Shank Dia. 1/2"
19.0	11.0	41.5	8.0	8.0	22/08	£84.84
20.0	12.0	50.0	6.5	11.5	22/1	£84.84



,	R mm	D mm	C mm	Product Ref.	Shank Dia.
ĺ	12.0	25.0	8.0	7/06	£47 27

SHANK MOUNTED BEARING


**GUIDED HOUSING** 


Template thickness should be 5mm thicker than cut length of cutter. Can be used to rout both tenons

and housings.

### **OVOLO** Ideal for edge of drawer fronts and N. W. S. P. cabinet doors. D

R mm	D mm	D2 mm	C mm	Product Ref.	Shank Dia.
4.0	13.0	1.2	12.0	11/50	£31.78





	R mm	D mm	D2 mm	C mm	Product Ref.	Shank Di 1/4"	ameter 1/2"
	2.5	9.5	3.2	9.0	7/01	£27.79	-
	3.0	18.0	12.0	10.0	7/1	£39.70	-
l	5.0	22.0	12.0	12.0	7/2	£53.60	£53.59




### PANEL & **VEINING**

A range of small sized panelling cutters. Ideal for veining and fluting applications.

Ref.


16/2



R mm	D mm	C mm	Product Ref.	Shank Dia. 1/4"
4.8	9.5	7.5	16/2	£42.38
6.0	13.0	12.5	16/3	£45.57
7.5	14.5	19.5	16/4	£48.75



## SHANK MOUNTED **BEARING GUIDED**



A Deg.	D mm	C mm	B mm	Product Ref.	Shank 1/4"	Diameter 1/2"
60°	12.7	16.0	12.7	11/20	£40.37	-
45°	12.7	12.7	12.7	11/40	£35.46	-
45°	19.1	16.0	19.1	11/41	-	£37.83

21/3

### С D В Product **Shank Diameter** Ref. mm mm mm 19.1 11.1 19.1 21/1 £46.58 £46.58 25.4 11.1 25.4 21/2 £48.71 38.1 16.0 38.1 21/3 £68.16

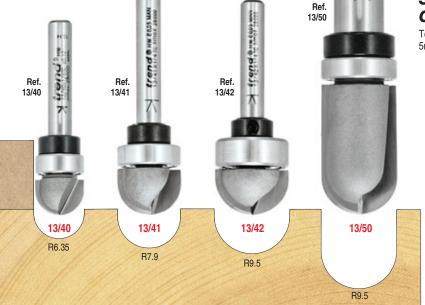
### SHANK MOUNTED BEARING **GUIDED RADIUS**

Template thickness should be 5mm thicker than cut length of cutter.



200
11
в 🗐
7
$_{\rm B}$
D ⊢

	Draining	g board				D 1
R mm	D mm	C mm	B mm	Product Ref.	Shank D	iameter 1/2"
6.35	12.7	9.5	12.7	13/40	£35.46	-
7.9	15.9	11.0	16.0	13/41	£47.94	-
9.5	19.0	11.0	19.0	13/42	£57.67	-
9.5	19.0	32.0	19.0	13/50	-	£66.03





С


## MINIATURE BEARING CUTTERS



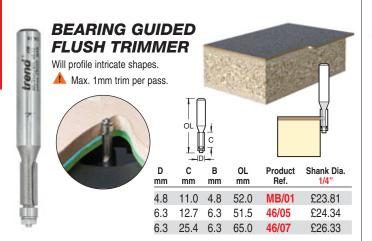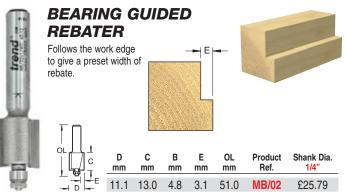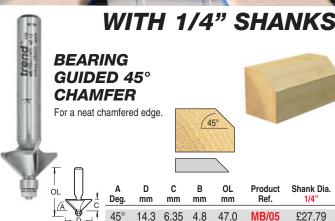- . Ideal for sign-making, musical instrument making and other small intricate projects.
- Can be used on wood and plastic.
- · A selection of profiles to give access into tight corners.
- Unique, small design eliminates the need for hand sanding or filing.
- ▲ Please note: These tools have miniature bearings fitted which have a limited life of approx. 100 linear metres, after which these consumables will need to be replaced.















Dia.

$\top$	Н mm	mm	mm	mm B	OL mm	Product Ref.	Shank Dia. 1/4"
OL C	2.4	9.5	9.5	4.8	46.0	MB/06	£31.11
I Z Č	3.2	11.1	9.5	4.8	46.0	MB/07	£31.11
—— B ⊢ —— B	4.0	12.7	9.5	4.8	46.0	MB/08	£31.74


### SHANK MOUNTED BEARING GUIDED STRAIGHT PLUNGE TEMPLATE PROFILER



Refs. 46/900 & 46/902 have two 9.5mm (3/8") diameter bearings which give added stability. Refs. MB/09 & MB/10 have

miniature limited life bearings fitted.

Max. 1mm trim per pass for Refs. MB/09 & MB/12.



TN	D mm	C mm	B mm	OL mm	Product Ref.	Shank Dia.
아 🚉 🖈	9.5	6.35	9.5	65.0	46/900	£21.84
/ c	9.5	13.0	9.5	51.0	46/902	£27.79
	4.8	6.3	4.8	47.0	MB/09	£34.82
TA	4.8	12.0	4.8	51.0	MB/10	£34.82
	6.3	6.3	6.3	47.0	MB/11	£34.82
or []	6.3	19.0	6.3	62.0	MB/12	£38.31
B B	REPL	ACEMEN	IT BEAR	INGS	Product Ref.	Price
<u> </u>	Boorin	g 4.8mm	α		B48J	£6.48
$D \rightarrow \vdash \uparrow$	Dealli	y 4.011111	NO.		D400	20.40

	Product Ref.	Price
Bearing 4.8mmØ	B48J	£6.48
Bearing 6.3mmØ	B63B	£6.48
Bearing 9.5mmØ	B95	£6.48



SPARE NOSE **MOUNTED** 

		Product Ret.	Price
í	Bearing 4.8mmØ (1 off)	B48J	£6.48
Í,	Bearing 4.8mmØ (10 pack	) <b>B48J/10</b>	£51.63

Miniature bearings have limited life.



## **SLOTTING & GROOVING**






### **BEARING GUIDED BISCUIT JOINTER SET**


For biscuit jointing of timber, man-made fibre and particle board with the router. The set includes three sizes of bearing which set the correct depth of cut for the three sizes of biscuit available.

A slightly longer cut than the length of the biscuit is required, to allow some lateral play for easy alignment during assembly. A water based glue (PVA) is used with the biscuits which will expand

as the moisture is absorbed. Boards are simply clamped together until glue is cured.

For larger boards, biscuits can be doubled up by making two passes. Profiles showing cross section of biscuit joints.





Biscuit dimensions shown below. All sizes shown are nominal.

No. 0 47.5mm x 15.5mm x 4mm Suitable for 8 -12mm board



No. 20

**Shank Diameter** 

8mm

£65.36 £65.36 £65.36

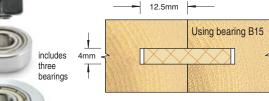
Timber thickness Min. 15.0mm May 10 0m


### WOODEN **BISCUITS**

See page 196 for a variety









D

mm

40.0

Instructions supplied

С

mm

4.0

В

mm

15.0

B2

mm

19.0



В3

mm

23.0

Product


Ref.

342



A complete cutter set for producing matchlining. Jointing parts are interchanged on the arbor to change the mode of the cutter. A 6.0mm tongue is obtained.

Includes two bearings and two groovers.










end



1.1	Max. 19.0mm
A C C C C C C C C C C C C C C C C C C C	45° 338

A	D	D2	C	C2	B	B2	Product	Shank Dia.
Deg.	mm	mm	mm	mm	mm	mm	Ref.	1/2"
45°	47.0	-	11.0	6.0	34.0	22.0	338	

**BEARING GUIDED** INFINITELY VARIABLE 'QUAD' GROOVER SET

This versatile 1/2" shank groover set offers grooving widths of 3.2mm, 4.0mm, 4.8mm and 6.3mm. It is also infinitely variable from 6.6mm to 18mm in 0.1mm increments.

A jointing facility using the bearing is also possible.

Set comprises of four 2 wing groovers with 7.94mm (5/16") bore and an arbor which may be used singly or together to produce a wide range of groove widths. One ball bearing supplied as standard.

This set can also be used to tongue and groove 9mm to 22mm board.



Description	E mm	C2 mm	D mm	B mm	Product Ref.	Shank Dia. 1/2"
Quad Groover Set	12.8	3.2 to 18.0	47.6	22.0	QUAD	£95.43
COMPRISES	E mm	C mm	D mm	B mm	Product Ref.	Price
Groover A	12.8	3.2	47.6	-	SP-QUAD/18	£28.58
Groover B	12.8	4.0	47.6	-	SP-QUAD/532	£28.58
Groover C	12.8	4.8	47.6	-	SP-QUAD/316	£28.58
Groover D	12.8	6.3	47.6	-	SP-QUAD/14	£28.58
Standard bearing	12.8	7.0	-	22.0	BB22	£11.11
Arbor	-	-	-	-	33/30	£9.80


ACCESSORIES (not included in set)

	E mm	C mm	D mm	B mm	Product Ref.	Price
Groover	12.8	1.6	47.6	-	SP-QUAD/116	£16.23 +
Groover	12.8	2.0	47.6	-	SP-QUAD/564	£16.23 +
Bearing 19.0mmØ	14.3	6.0	-	19.0	BB19	£11.06
Bearing 24.0mmØ	11.8	8.0	-	24.0	BB24	£10.85
Bearing 25.0mmØ	11.3	8.0	-	25.0	BB25	£14.96
Bearing 26.0mmØ	10.8	6.0	-	26.0	BB26	£14.96
Bearing 28.0mmØ	9.8	8.9	-	28.0	BB28	£14.96
Bearing 29.0mmØ	9.2	8.0	-	29.0	BB29	£14.96
Bearing 30.0mmØ	8.8	8.0	-	30.0	BB30	£14.96
Bearing 34.0mmØ	6.8	8.0	-	34.0	BB34	£14.96



### **BEARING GUIDED** VARIABLE KERF GROOVER

To adjust the groove width, these tools can be re-assembled with the supplied shims and spacers inserted between the groovers, giving a 0.1mm increment in thickness.



C mm	E mm	D mm	B mm	Product Ref.	Shank Dia. 1/2"
3.0 to 5.0	11.0	50.0	28.0	27/35	£63.60
5.0 to 9.0	11.0	50.0	28.0	27/59	£68.91



### SPECIALIST GROOVER

Two wing groovers have 6.35mm (1/4") bore. For use with Ref. 33/60 arbor. Allows decorative cuts in panels and frames to disguise glue lines & for fluting effects.

With arbor Ref. 33/60X1/4, the max. distance from the edge is approx. 25mm. With arbor Ref. 33/60X1/2, the max. distance from the edge is approx. 35mm.





Deg.	mm	mm	mm	mm	Ref.	1/4"
45°	-	6.0	36.0	6.35	34/200	£36.75 +
-	3.0	6.0	36.0	6.35	34/220	£47.32

### **ARBOR & BEARINGS**

Arbor with 1/4", 8mm or 1/2" shank	33/60	£17.08
Bearing 30.0mmØ for 3.0mm depth	B300	£11.06
Bearing 29.0mmØ for 3.5mm depth	B290	£10.48
Bearing 28.0mmØ for 4.0mm depth	B280	£10.48
Bearing 26.0mmØ for 5.0mm depth	B260	£10.48

### SHIMS & SPACER SET

### SHIM SETS

Set of twelve shims for fine adjustment of slotters and groovers on arbors. Each set comprises two shims of each thickness



0.1mm 0.3mm 0.4mm 0.6mm 0.8mm 1.0mm

### SHIM PACKS

Spare shim packs for adjusting profile scribe sets. Supplied in packs of 10, either 0.05mm or 0.1mm thick.



0.05mm or 0.1mm

### SPACER SET Ref. SPACER/63

A set of six spacers. Comprises three of each size.





### SPACER SET Ref. SPACER/8

A set of thirteen 8mm spacers & shims. Comprises two spacer/shims of each thickness & one extra 0.05mm shim.



0.05mm 0.1mm 0.5mm 1.0mm 3.0mm

### SPACER SET Ref. SPACER/12

A set of six 12mm bore spacers.

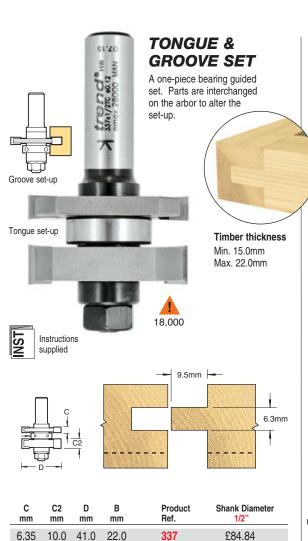


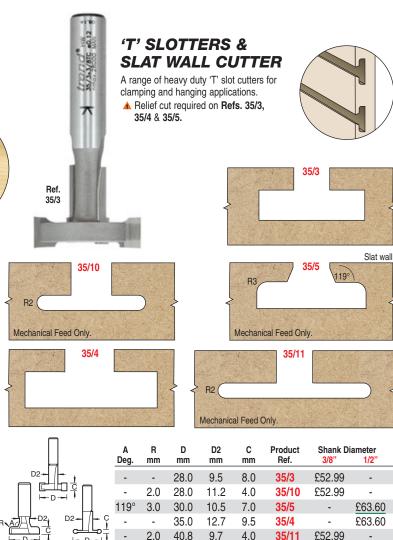
1.0mm 2.0mm 3.0mm 4.0mm 6.3mm

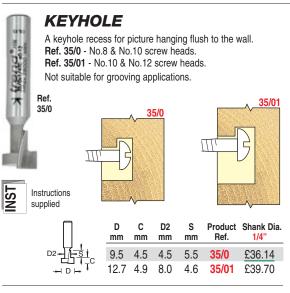
Bore Size mm (ID)	Outside Dia. mm (OD)	Thick mm	Product Ref.	Price
6.3	11.5	-	SHIM/63	£8.35
8.0	14.0	-	SHIM/8	£8.35
12.0	18.0	-	SHIM/12	£8.35
8.0	16.0	0.05	SHIM/PACK/1	£5.30
8.0	16.0	0.1	SHIM/PACK/2	£5.30
6.3	12.6	-	SPACER/63	£4.89
8.0	16.0	-	SPACER/8	£8.35

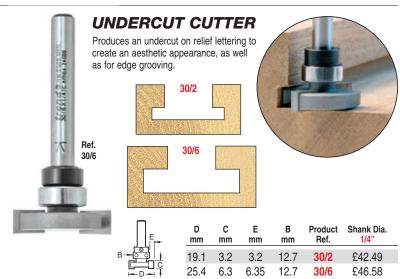
56

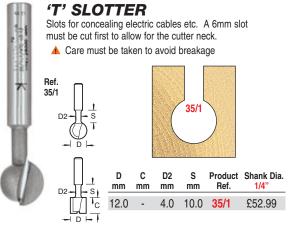
Ref. 34/220

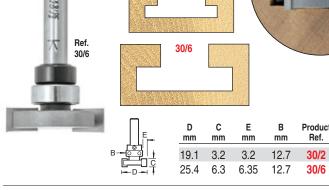


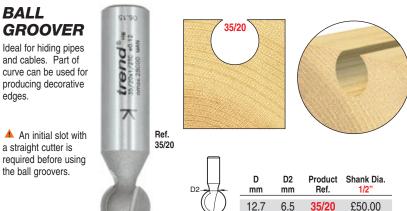












edges.

## **ARBORS & SLOTTERS**



- . Applications for these tools include grooving for biscuit jointing, matchlining, tongue and grooving and cutting slots for weather proofing frames and doors.
- All slotters are precision made in TCT grade for long life when cutting the most abrasive materials.

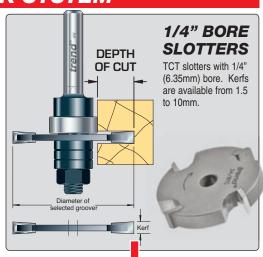
### ARBORS, SLOTTERS & BEARINGS TO **CREATE CUSTOMISED SLOTTING & GROOVING TOOLS**



Ensure slotters are fitted the correct way onto the arbor with respect to the direction of rotation. Bearings and slotters should be fitted as near to the shank as possible to avoid vibration.

### 1/4" STACK SYSTEM





### 1/4" BORE **BEARINGS**

Use of a bearing will govern the depth of cut without the need of a side-fence. The smaller the bearing, the deeper the cut. The chart below shows the depths of cut possible with each size of bearing.



			USE C	HART	BELOW	TO FIN	ID DEP	TH OF	CUT		7	7						Ш	1/4"	•
Kerf	1.5	1.5	2	2	2.5	2.5	2.5	3	3	4	4	5	5.5	6	7	8	10	] [		
Ref.	SL/A	SL/AA	SL/B	SL/E	SL/C	SL/CC	SL/F	SL/D	SL/DD	SL/G	SL/GG	SL/K	SL/H	34/20	34/8	34/33	34/41			
Price	£27.79	£26.47	£27.79	£27.79	£27.79	£26.47	£31.36	£27.79	£26.47	£31.36	£29.90	£34.14	£34.14	£39.70	£47.27	£47.27	£51.48	l ♥ ˈ		
Dia.	36	40	36	40	36	40	50	36	40	36	40	40	36	41.3	40	41.3	41.3	Ref.	Dia. ₄	Price
Teeth	_2_	2	2	2	2	2	2	2	2	2	2	2	2	2	4	2	2	~~		<u>~</u>
	11.6	13.6	11.6	13.6	11.6	13.6	18.6	11.6	13.6	11.6	13.6	13.6	11.6	14.3	13.6	14.3	14.3	B127	12.7	£7.81
	11	13	-11	13	11	13	18	11	13	11	13	13	11	13.6	13	13.6	13.6	B14	14 5	£11.92
	10.5	12.5	10.5	12.5	10.5	12.5	17.5	10.5	12.5	10.5	12.5	12.5	10.5	13.1	12.5	13.1	13.1	B15		£11.92
	10	12	10	12	10	12	17	10	12	10	12	12	10	12.6	12	12.6	12.6	B16		£4.64
	9.5	11.5	9.5	11.5	9.5	11.5	16.5	9.5	11.5	9.5	11.5	11.5	9.5	12.1	11.5	12.1	12.1	B17		£11.92
	9	11	9	11	9	11	16	9	11	9	11	-11	9	11.6	11	11.6	11.6	B18		£12.17
	8.5	10.5	8.5	10.5	8.5	10.5	15.5	8.5	10.5	8.5	10.5	10.5	8.5	11.1	10.5	11.1	11.1	B19	19	£5.18
Ħ	8	10	8	10	8	10	15	8	10	8	10	10	8	10.6	10	10.6	10.6	B20		£11.06
of	7.5	9.5	7.5	9.5	7.5	9.5	14.5	7.5	9.5	7.5	9.5	9.5	7.5	10.1	9.5	10.1	10.1	B21		£11.06
Depth of Cut	7	9	7	9	7	9	14	7	9	7	9	9	7	9.6	9	9.6	9.6	B22	_	£11.06
Δ	6.5	8.5	6.5	8.5	6.5	8.5	13.5	6.5	8.5	6.5	8.5	8.5	6.5	9.1	8.5	9.1	9.1	<b>B23</b>		£11.06
	6	8	6	8	6	8	13	6	8	6	8	8	6	8.6	8	8.6	8.6	B24		£11.11
	5.5	7.5	5.5	7.5	5.5	7.5	12.5	5.5	7.5	5.5	7.5	7.5	5.5	8.1	7.5	8.1	8.1	B25	25 5	£11.06
	5	7	5	7	5	7	12	5	7	5	7	7	5	7.6	7	7.6	7.6	B260		£10.48
	4.5	6.5	4.5	6.5	4.5	6.5	11.5	4.5	6.5	4.5	6.5	6.5	4.5	7.1	6.5	7.1	7.1	B270	27 9	£10.48
	4	6	4	6	4	6	11	4	6	4	6	6	4	6.6	6	6.6	6.6	B280		£10.48
	3.5	5.5	3.5	5.5	3.5	5.5	10.5	3.5	5.5	3.5	5.5	5.5	3.5	6.1	5.5	6.1	6.1	B290		£10.48
	3	5	3	5	3	5	10	3	5	3	5	5	3	5.6	5	5.6	5.6	B300	30 9	£11.06

These slotters have a 12mm clear bore to

enable them to be mounted at any position

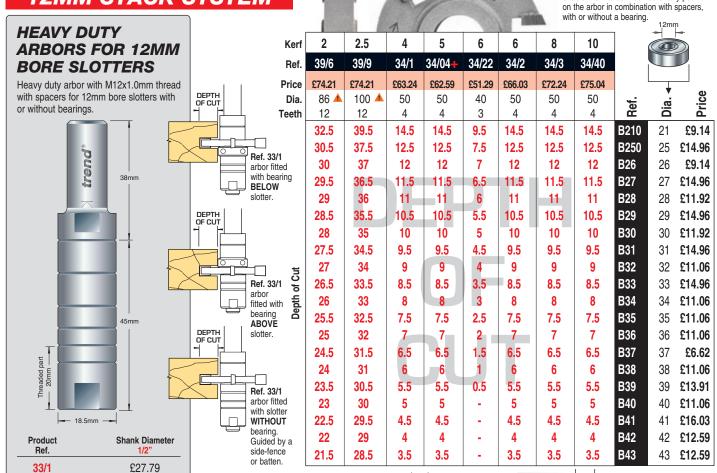
Ref. 33/10 guided

12mm

by side-fence or

batten guide.

### 12MM STACK SYSTEM




Kerf

### M12 THREADED SYSTEM
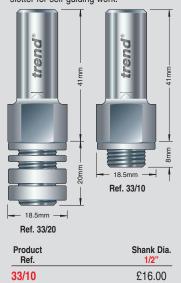
### HEAVY DUTY ARBORS FOR M12 BORE SLOTTERS

Slotters with M12x1.0mm threaded bore enables flush recessing in the corner for weather proofing. Spacers are supplied where applicable to ensure the minimal threaded arbor protrudes below the slotter. Arbor Ref. 33/20 enables 12mm bore guide bearings to be fitted above slotter for self-guiding work.



33/20

33/21 (for Ref. 34/16TC only)

These slotters have a M12 threaded boss to enable them to be threaded onto the arbor without the need for a securing nut.

2.5

Kerf	2	2.5	3	4	5	6	7	8	9.5	10	11	15			
Ref.	34/03	34/9	34/10	34/11	34/110	34/12	34/7	34/13	34/5	34/15	34/14	34/16*			
Price	£68.82	£69.47	£69.47	£68.82	£70.93	£70.93	£77.15	£73.05	£86.93	£63.60	£79.26	£63.60		L	¥a>
Dia.	50	50	50	50	50	50	50	50	50	40	50	40	Ref.	Dia.	Price*
Teeth	_4	4	4	4	4	4	4	4	4	2	4	2	œ	۵	
	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	9.5	14.5	9.5	B210	21	£9.14
	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	12.5	7.5	12.5	7.5	B250	25	£14.96
	12	12	12	12	12	12	12	12	12	7	12	7	B26	26	£9.14
	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	6.5	11.5	6.5	B27	27	£14.96
	11	11	11	-11	11	11	11	11	11	6	11	6	B28	28	£11.92
	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	10.5	5.5	10.5	5.5	B29	29	£14.96
	10	10	10	10	10	10	10	10	10	5	10	5	B30	30	£11.92
	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	9.5	4.5	9.5	4.5	B31	31	£14.96
Ħ	9	9	9	9	9	9	9	9	9	4	9	4	B32	32	£11.06
Depth of Cut	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5	8.5	3.5	8.5	3.5	B33	33	£14.96
pth	8	8	8	8	8	8	8	8	8	3	8	3	B34	34	£11.06
De	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	2.5	7.5	2.5	B35	35	£11.06
	7	7	7	7	7	7	7	7	7	2	7	2	B36	36	£11.06
	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	6.5	1.5	6.5	1.5	B37	37	£6.62
	6	6	6	6	6	6	6	6	6	1	6	1	B38	38	£11.06
	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	5.5	0.5	5.5	0.5	B39	39	£13.91
	5	5	5	5	5	5	5	5	5	-	5	-	B40	40	£11.06
	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	-	4.5	-	B41	41	£16.03
	4	4	4	4	4	4	4	4	4	-	4	-	B42	42	£12.59

Ref. 33/20

fitted with

Q

0.5

DEPTH OF CUT guide bearing.

DEPTH OF CUT

10

3.5

3.5

Above Bearings for use with **Ref. 33/20** Arbor.

43 £12.59



3.5

**B43** 

£16.00

£16.00

3.5

3.5

3.5

3.5

3.5

3.5

<sup>\*</sup> These groovers must be used with different arbors - see left.

### **WEATHERSEAL** RECESSING & SEALS



# BEARING GUIDED AQUAMAC 21 & AQUATEX A10 STYLE RECESSER Ref. 334 and 34/56 recessing cutters will

Ref. 334 and 34/56 recessing cutters will accommodate the Schlegel® Aquamac 21 and Exitex® Aquatex A10 seal.


These cutters are designed for use with the seal in a wiping mode and come complete with a guide bearing to reduce setting-up time and simplify machining operations.


Ref. 34/56 can be used in a smaller medium duty router.

C C2

mm mm

W. BUSH K






9.3 2.7 33.8 21.8 16.0 70.0 34/56 £74.53 28.6 £95.43 10.3 2.7 46.3 34.3 90.0 334

### **AQUA 21 & A10 STYLE STRIP**

Strip is fitted into the frame rebate (head and jambs) as three cut pieces forming a compression or wiping seal. The seal is butt joined at the corners. To seal the door bottom, weather bar is mounted into the threshold section. It is important that the seal does not abut the weather bar but runs to the threshold section in front (weatherside) of it, to maximise water permeability resistance.

See page 196 for prices.




Colour	Approximate Length	Product Ref.
White	10 metres	AQ21/W/10
White	25 metres	AQ21/W/25
Brown	10 metres	AQ21/B/10
Brown	25 metres	AQ21/B/25


# BEARING GUIDED AQUAMAC 63 & AQUATEX P6 STYLE RECESSER Ref. 331 and 34/55 are designed to

Ref. 331 and 34/55 are designed to accommodate the popular Schlegel® Aquamac 63 and Exitex® Aquatex P6 weather strip system and allows for a particularly small gap between sash and frame. The slot can be positioned part way down the side of the rebate or at the bottom of the rebate. Tools come complete with a guide bearing to reduce setting-up time.

Ref. 34/55 can be used in a smaller medium duty router.



# HAND MITRE SHEARS For perfect snipping & mitre cuts of weatherseal, mouldings & beading. See page 198 for full details. Product Ref. HM/SHEAR

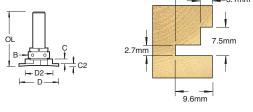


•	C2 mm	D mm	D2 mm	B mm	OL mm	Product Ref.	Shank D 8mm	iameter 1/2"
4.8	2.7	35.2	22.2	16.0	70.0	34/55	£68.79	-
4.8	2.7	41.3	28.3	22.0	67.0	331	-	£95.43

### AQUA 63 & P6 STYLE STRIP

Strip is fitted into the frame aperture using four cut lengths. It is important to create tight butt or notched joints to ensure high levels of window performance. Joints can be enhanced by the application of a small amount of silicone mastic. When fitted, it is necessary to notch the seal end.

See page 196 for prices.



Colour	Approximate Length	Product Ref.
White	10 metres	AQ63/W/10
White	25 metres	AQ63/W/25
Brown	10 metres	AQ63/B/10
Brown	25 metres	AQ63/B/25

HM/SHEAR/A




Ref. 331

### **BEARING GUIDED WEATHER PILE RECESSER** - OFFSET LEG CARRIER

with a guide bearing to reduce setting-up time and is particularly useful for the meeting rails on sliding box






### **BEARING GUIDED WEATHER PILE RECESSER - CENTRAL LEG CARRIER**

SASAT,

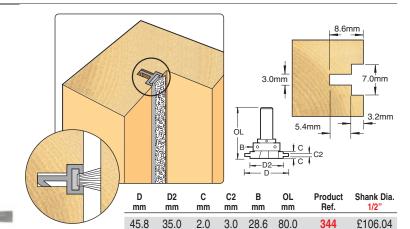Ref. 344 recessing cutter is designed to accommodate the Central Leg Carrier weather pile. It comes complete with a guide bearing to reduce setting-up time. Can be used for compression or sliding applications. Previously known as Carripile II.



D

mm

45.8

D2

mm

35.0


### **FITTING** WEATHERSEAL

Barbed weatherseals can be fitted to window and door frames if a groove can be machined in the frame. This groove accepts the barb of the weatherseal. The router is fitted with a threaded arbor on to which a groover, with an internal M12 thread, has been mounted.




Stepped groove using a bearing auide.

Slotter: Ref. 34/03 Bearing: Ref. B38



- · Bearing allows ease of set-up.
- Grooves can be routed near to the bottom of a rebate.
- · Arbor supplied with spacers.



GROOVERS	3	
Kerf mm	Dia. mm	I

Kert mm	Dia. mm	Bore	Product Ret.	Price
2.0	50.0	M12	34/03	£68.82
2.5	50.0	M12	34/9	£69.47
3.0	50.0	M12	34/10	£69.47
	2.5	2.0 50.0 2.5 50.0	2.0 50.0 M12 2.5 50.0 M12	2.0 50.0 M12 <b>34/03</b> 2.5 50.0 M12 <b>34/9</b>

ARBORS	Product Ref.	Shank Dia. 1/2"
For use with side-fence	33/10	£16.00
For use with bearing guide	33/20	£16.00

BEARINGS	Groove Depth mm	Product Ref.	Price
This chart matches	6.0	B38	£11.06
the ball bearing with the relevant groove	6.5	<b>B37</b>	£6.62
depth when used	7.0	B36	£11.06
with arbor Ref. 33/20	7.5	B35	£11.06
and the groovers	8.0	B34	£11.06
above.	8.5	B33	£14.96

## Arbor: Ref. 33/20

### ROUTASEAL CUTTER

- Cuts groove for Trend Routaseal.
- Position seal into apex of jamb and stop.
- More economic to use than more complex seals.
- Use with a small 1/4" shank hand router.






OL	A	C	D	OL	Product	<b>TCT</b> 1/4"
C	Deg.	mm	mm	mm	Ref.	
<u>A</u> )( <u>+</u>	115°	3.0	5.0	61.0	31/10L	£35.46


### ROUTASEAL STRIP

- · High grade silicon rubber weatherseal.
- Will withstand temperatures of -30° to +200°C.
- Recessed using a small 1/4" shank hand router.
- Can be slid or tucked in from the top face. Compresses to approximately 3.5mm.

• Groove depth should be 3mm.

See page 196 for prices.






Not shown actual size



Colour

White

Brown



Ref. 34/61

# INTUMESCENT & SMOKESEAL RECESSING





(Fixed for 4.0mm thick strip)

D

mm

27.05

27.05

D

mm

40.0

40.0

40.0

40.0

C

mm

10.0

15.0

С

mm

10.0

15.0

20.0

25.0

INTUMESCENT STRIP RECESSING CUTTERS

mm

4.0

4.0

INTUMESCENT RECESSING CUTTER SETS (Threaded System for 4.0mm thick strip. See below for other thicknesses).

Ε

mm

4.0

4.0

4.0

4.0

mm

75.0

80.0

mm

41.0

41.0

41.0

41.0

В

mm

19.05

19.05

В

mm

32.0

32.0


32.0

32.0

### **BEARING GUIDED** INTUMESCENT RECESSER

- For either frame or door applications, with standard or Intumescent Strip.
- · Neatly cuts grooves on doors or frames to accept Intumescent Strip which enables the formation of effective barriers to both fire and smoke.
- Two types of tool available: - 4mm fixed depth tool
- Refs. 34/60 & 34/61.
- 4mm threaded system tool Refs. 345, 346, 348 & 356.
- For the threaded system, tools can also be used with alternative bearing diameters to allow for other strip thicknesses.

For 4.0mm thick intumescent strip. Refs. 34/60 & 346 for 10mm width. Refs. 34/61 & 348 for 15mm width. Ref. 345 for 20mm width. Ref. 356 for 25mm width.



## THREADED SYSTEM TOOL ALTERNATIVE BEARINGS

(For other strip thicknesses) *							
Bearing mmØ	Strip Thickness mm	Product Ref.	Price				
36.0	2.0	B36	£11.06				
34.0	3.0	B34	£11.06				
30.0	5.0	B30	£11.92				
28.0	6.0	B28	£11.92				
26.0	7.0	B26	£9.14				

\* A spacer set Ref. SPACER/12 may be required for some bearings.

Product Shank Dia.

£49.50

£49.50

Shank Dia.

£84.82

£84.82

£84.82

£90.13

Ref

34/60

34/61

Product

Ref.

346

348

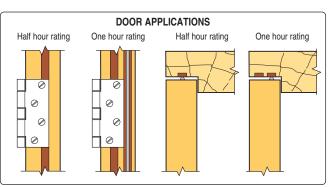
345


356






supplied with threaded system.






4.0mm




### **BEARING GUIDED SMOKESEAL** RECESSER


Refs. 332 and 333 are designed to accommodate quick fit smokeseal brush strips. The groove is cut in the door edge rather than the frame. Ref. 332 must be used with a side-fence, whereas Ref. 333 comes complete with a guide bearing to

reduce setting-up time.



OL _
B-0 0 1 C
D2





C mm	C2 mm	D mm	D2 mm	B mm	OL mm	Product Ref.	Shank Dia. 1/2"
8.0	2.5	45.0	34.0	-	58.0	332	£74.12 +
8.0	2.5	45.0	34.0	28.0	58.0	333	£74.12 +

0000 1/210 0012

Ref. 333

Ref. 105/35

## **DRILLING** WITH PORTABLE & STATIONARY ROUTERS



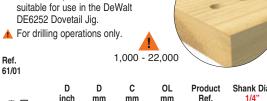




### ROUTER DOWEL DRILL

- Two flute lip and spur.
- · For drilling blind holes.
- These slow spiral TCT drills can be used in drilling machines or portable routers.
- Refs. 61/01, 61/06 and 61/08 are suitable for use in the DeWalt DE6252 Dovetail Jig.





т О	D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
i	3/16	4.8	27.0	57.0	61/80	£16.75 +
~ HT	-	5.0	35.0	57.0	61/05	£24.34
TW c	-	6.0	35.0	70.0	61/06	£18.90 +
I M ĭ	-	8.0	35.0	70.0	61/08	£24.34
<u> </u>	-	10.0	35.0	70.0	61/01	£24.34

### ROUTER HINGE BIT

- These router hinge bits have a specially designed form of scriber to allow use at high speeds.
- For recessing circular hinges.

For accurate repetitive routing, a template and guide bush fitted to the router base should be used.

For drilling operations only.






D	OL	Product	Shank D	
mm	mm	Ref.	8mm	1/2"
35.0	60.0	105/35	£60.48	£65.36
40.0	60.0	105/40	-	£68.82

### ROUTER DRILL COUNTERSINK / **COUNTERBORE**

- · For abrasive materials.
- Tools will drill, countersink and finally counterbore a parallel hole.
- Designed to receive plug produced by plug maker Ref. 24 group shown on the right.
- The drill diameter sizes are for a clearance hole only.








Ref.

Wood Screw Size	D C/B mm	D2 Drill inch	D2 Drill mm	C mm	Product Ref.	Shank Dia. 1/4"
No.8	9.5	3/16	4.8	20.0	62/80	£58.35
No.10	12.0	7/32	5.5	20.0	62/10	£58.35
No.12	16.0	1/4	6.3	20.0	62/12	£45.32 +

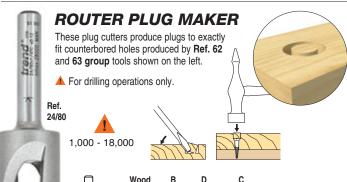




В	Wood Screw Size	B Body mm	D Plug mm	C Plug depth max.	Product Ref.	Shank Dia.
	No.8	16.0	9.5	16.0	24/80	£52.12
	No.10	19.0	12.0	16.0	24/10	£52.12
	No.12	22.0	16.0	16.0	24/12	£52.12

### ROUTER THROUGH HOLE DRILL

- · Two flute spiral 'V' point.
- TCT for abrasive wood based materials.
- Drills allow holes to be drilled right through material.
- Can be used in drilling machines or portable routers.
- ▲ For drilling operations only.
- ▲ For router drilling a guide bush and template are required.
- For use in a professional router with a suitable plunge depth to ensure a safe cutter retraction into base.

D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
5.0	37.0	69.0	64/05	£23.54
6.0	37.0	69.0	64/06	£23.54 +
8.0	39.0	69.0	64/08	£21.96+
10.0	39.0	69.0	64/10	£35.40






### ROUTER PIP CUTTER


- For decorative use on carvings and ornate work.
- Material around pips can be removed with a straight flute cutter or with a chisel.
- · Smaller pip sizes should be used with close grain timber.
- · Cutters have small diameters to allow closer pips.
- For drilling operations only.

SECURITY OF WEDER OF SECOND

Ref. 28/3




R mm	D mm	C mm	Product Ref.	Shank Dia. 1/4"	
2.0	8.0	9.0	28/2	£25.38 +	
2.5	9.0	9.0	28/25	£29.90 +	
3.0	10.0	8.5	28/3	£29.18 +	
4.0	12.0	9.0	28/4	£31.86 +	
5.0	14.0	9.0	28/5	£35.14 +	






### CUTTERS FOR SOLID SURFACES INC. CORIAN® SINGLE FLUTE . Especially designed for routing solid surface material, including Corian® and similar luxury solid surface Eccentric single flute material which is used in many bathrooms and kitchens. cutter. For fast free cutting, when cutting speed takes . Cutters range from simple straights to preference over finish. elaborate edge moulding cutters. Most bearing guided cutters have plastic Ref. sleeves fitted to protect the workpiece. 7/96 **BEARING GUIDED ROMAN OGEE** For finishing undermount bowl. 7/97 16.000 Plastic sleeved bearing R D C Product Shank Dia. 1/2 Deg. mm mm mm Ref. D С Product Shank Dia. 75° 12.7 54.0 25.0 7/96 £74.12 + £95.43 mm mm Ref 1/2 75° 14.0 57.0 32.0 7/97 £95.43 9.5 25.4 2/7 £30.56 **BEARING GUIDED** TRIMMER Self guided tools for trimming inlay or overlaps. Ref.




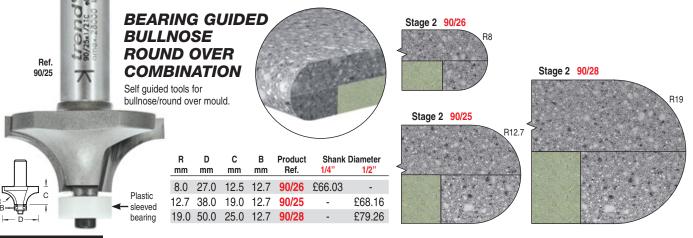





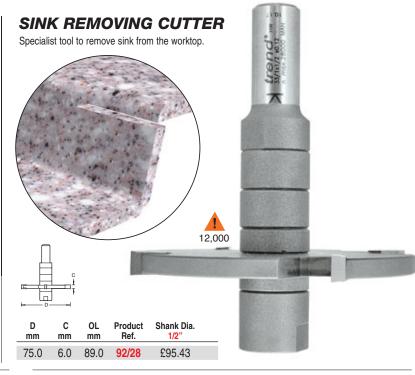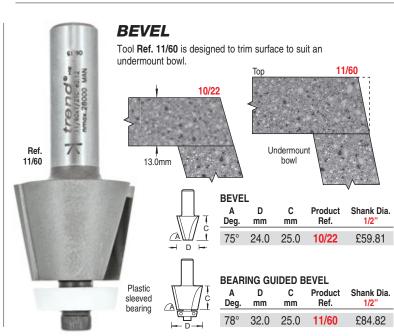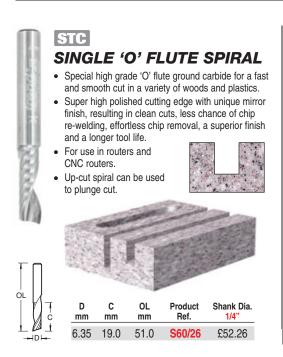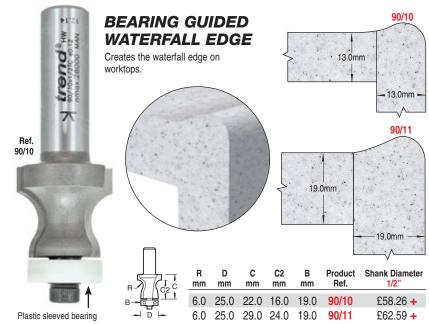










## RASPS, BURRS & COMPOSITE CUTTERS





## **SOLID CARBIDE** ROUTER RASPS

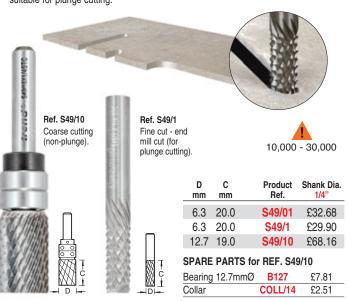- Solid Carbide coarse and fine cut router rasps.
- For grinding, carving and shaping of glass reinforced plastics (GRP).
- Ref. S49/10 with twin bearing guides is ideal for following a template but is not suitable for plunge cutting.




### **COMPOSITES** ALUCOBOND® ROUTER CUTTERS

- Tungsten Carbide Tipped 'V' groove cutters.
- Use at 12,000 to 15,000 RPM and feed speed of 400 600mm/min.

Specially designed tools for aluminium composite cladding material such as Alucobond® and Dibond® which comprises of an aluminium cover with a polyethylene core.

67.5°

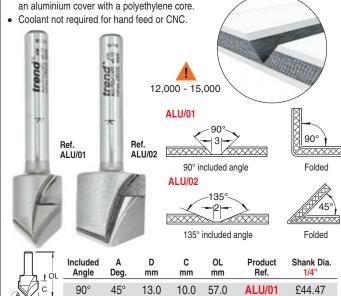18.0





### **COMPOSITES** ROUGHING SPIRAL ROUTER CUTTERS

- Solid carbide spiral roughing tool to rout composite materials including phenolics, carbon fibre, fibreglass and Trespa®.
- Unique grinding and multi-flute design.
- Suitable for roughing cuts in hard and abrasive material. Roughing cuts are for bulk removal and require separate finishing cutter for clean up.
- Special grade carbide for maximum durability.
- Down-cut for better clamping when machining small workpieces and improved finish on the tops of the board.
- For use in routers and CNC machines/routers.
- Not recommended for plunge cutting unless ramped into workpiece.
- Please note separate machining of the rough cut edge is required.

SHOW .		•				
	D mm	C mm		Product Ref.		
2	6.3	25.4	62	S49/30	£43.37	+
	127	42 N	ΩΩ	C/10/32	_	£02 \3



### **BURRS** & RASPS

### For grinding and carving

- Range of various tooling for metal, glass reinforced plastic (GRP), plastic and wood.
- Solid Carbide head
- Carving and drilled hole enlarging.
- For removing welds and burrs in metal, also hand engraving and sculpting wood and metal.
- Mini burrs and rasps also ideal for modelling.
- Refs. S49/2 & S49/20 have no bottom cut.



Mini burrs and rasps are ideal for intricate



	D mm	C mm	Product Ref.	Shank Diameter 3mm
	3.0	12.0	S49/20	£15.35
	6.0	12.0	S49/21	£21.57
	6.0	12.0	S49/22	£23.69
	3.0	12.0	S49/23	£13.23
	6.0	6.0	S49/24	£22.23
_	3.0	13.0	S49/25	£15.35



13.0

57.0

ALU/02

£54.24 Ref. S49/2 - Cylinder













		468	9
RIIDDS	/ DA	202	

S	STANDARD BURRS / RASPS								
	A Deg.	D mm	C mm	Product Ref.	Shank D 6mm	iameter 1/4"			
	-	10.0	20.0	S49/2	£27.79	£27.79			
	-	10.0	20.0	S49/3	£29.24	£29.24			
	-	10.0	20.0	S49/4	£31.36	£31.36			
-	45°	16.0	10.0	S49/5	£37.57	£37.57			
	-	10.0	10.0	S49/6	£27.13	£27.13			

Ref.



## ALUMINIUM / NON-FERROUS METAL







## TCT

### **SURFACE MILLING** TWO FLUTE

- · For aluminium and plastics.
- Tungsten Carbide Tipped.
- Can be used on aluminium windows.
- A coolant should be used when routing aluminium.





Ref. 47/2



D mm	C mm	OL mm	Product Ref.	Shank Diameter 1/4"
18.0	12.0	45.0	47/2	£43.03





Ref. S55/10

S55/22

Up-cut



D mm	C mm	OL mm	Product Ref.	Shank D	iameter 8mm	
6.3	20.0	63.0	S55/10	£45.92	-	
8.0	20.0	63.0	S55/08	-	£59.14	


MIRROR FINISH



### **GUIDED TWO FLUTE SPIRAL**


- Solid Carbide bearing guided router cutters for trimming aluminium sheet with a template.
- Specially designed carbide with two flutes for clean finish.
- Maximum trim of 3mm thick aluminium.
- Twin bearings for stability by increasing bearing surface.
- · Down-cut (left-hand) spiral prevents material lift.





Ref.

Up-cut



Down-cut

D mm	C mm	B mm	OL mm	Product Ref.	Shank Dia 1/4"
6.35	12.7	6.3	72.0	S64/30	£63.55
6.35	12.7	6.3	72.0	S64/30LH	£63.55

### STC

### 'O' FLUTE SPIRAL

- Special high grade Solid Carbide with very high tolerance grinding for smooth clean cut in aluminium, brass, copper and other non-ferrous metals.
- Single 'O' flute design for fast cutting. Increased feed rates allowing for more linear metres in less time.
- Super high polished cutting edge with unique mirror finish, resulting in clean cuts, less chance for chip re-welding, effortless chip removal, a superior finish and a longer tool life.
- For use in routers and CNC routers.
- Up-cut spiral can be used to plunge cut.
- Can be used on Alupanel® and Dibond®.
- Use a lubricant or coolant to prolong tool life.



cutting.







С OL **Shank Diameter** Product mm mm Ref. £42.91 S55/22 15.9 51.0 Routing phenolic plastic

Routing carbon fibre

All prices are exclusive of VAT

## PLASTICS & ENGRAVING TOOLING

### **ACRYLIC CUTTER**

- · Single flute for fast cutting.
- · Two flute for fine finish.
- · Cutters with prefix ACR are specially ground for cutting acrylic. Other two flute cutters can be polished for acrylic. Please refer to Trend Technical Department.
- Cutters with prefix S are Solid Carbide and are long lasting for a super fine finish.
- Cutters Ref. ACR2/80 & ACR3/81 can be used on phenolic resin.

### **TRENDICOTE**

Dry lubricant PTFE spray to enhance cutter life and prevent weld back of material to the

See page 234 for full details.

Product Ref. **TRENDICOTE** 







fast cutting.



Refs. ACRS3/22

Refs. 46/05 & 07 Two flute minitrim with guide bearing will profile intricate shapes Max. 2.0mm trimming.

& S60/1 Up-cut helical gives long lasting super

Ref. S60/03 - 06 Ref. S60/1LH Down-cut helical gives long lasting super fine finish on fine acrylics. fine finish. Prevents

### **ONE FLUTE**

	D	С	OL	Product	Shan	k Dia.
Grade	mm	mm	mm	Ref.	1/4"	1/2"
STC	6.3	10.0	51.0	ACRS2/6	£28.65+	
TCT	12.7	32.0	76.0	ACR2/80	-	£32.38+

### **TWO FLUTE**

6.3

STC

TCT	12.7	32.0	76.0	ACR3/81	-	£41.69	
BEARING GUIDED							
TCT	6.3	12.7	51.0	46/05	£24.34	-	
TCT	6.3	25.4	65.0	46/07	£26.33	-	

20.0 63.0 ACRS3/22 £39.70

### TWO FLUTE SPIRAL UP-CUT

Grade	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
STC	3.0	12.0	58.0	S60/03	£39.70
STC	4.0	14.0	59.0	S60/04	£39.70
STC	5.0	19.0	58.0	S60/05	£39.70
STC	6.0	19.0	59.0	S60/06	£39.70
STC	6.3	19.0	57.5	S60/1	£43.15

### TWO FLUTE SPIRAL DOWN-CUT

STC	6.3	19.0	57.5	S60/1LH	£45.25

**FOUR FLUTE** 

### STC ABS/PVC STRAIGHT

- · Used to slot and trim low melting point plastics such as ABS, Styrene and PVC
- For maximum life these cutters are Solid Carbide.
- Ref. ABSS2/61 is single flute for fast cutting.
- Ref. ABSS3/22 is two flute for fine

### **WINDOW INDUSTRY TOOLING**

For drilling and slot cutting of aluminium, anodised duralium and

See pages 70-71 for full details.



Single flute for fast cutting.

Two flute gives

### **ONE FLUTE**

D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
6.3	25.0	65.0	ABSS2/61	£22.23
TWO I	HITE			

6.3 25.0 65.0 ABSS3/22 £25.79

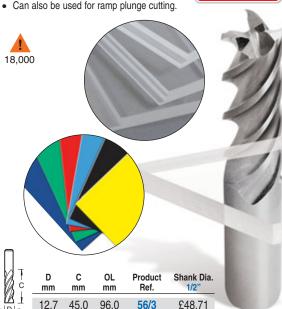
### HSS

vibration.

### FOUR FLUTE SPIRAL ACRYLIC CUTTER

- · High Speed Steel ideal for acrylic plastic.
- Four flute up-cut spiral.
- · Ideal for trimming, rebating and surfacing.

• Can also be used for ramp plunge cutting.






### STC SINGLE 'O' FLUTE SPIRAL

- Special high grade 'O' flute ground carbide for fast and smooth cuts in woods and plastics.
- Super high polished cutting edge with unique mirror finish, resulting in clean cuts, less chance of chip re-welding, effortless chip removal, a superior finish and a longer tool life.
- · For use in routers and CNC routers.
- . Up-cut spiral can be used to plunge cut.
- Designed for plastic, wood, foam board, acrylic, nylon, PVC, PVC trim boards, polycarbonate, solid surface, HDPE, ABS, UHMW, HIPS, PET, Polystyrene, Polypropylene (PP), Acetal and mechanical /engineered plastics.

OL T	D mm	C mm	OL mm	Product Ref.	Shank Dia.
L 2 1	6.35	19.0	51.0	S60/26	£52.26

### **STC** MINI UP-CUT & DOWN-CUT SPIRAL

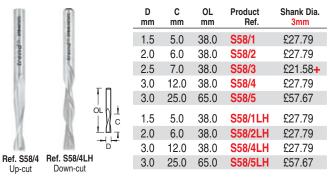- 3mm diameter shank, two fluted spiral cutters for CNC routers.
- For specialised applications including sign making & PCB machining.
- Up-cut prevents burning in plunge cuts. Down-cut (LH) prevents feathered edges.
- Can also be used on wood and plastic.





Down-cut


Up-cut

### PIN GUIDED TWO FLUTE SPIRAL



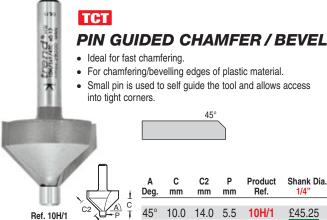
- Solid Carbide two flute solid brass pin guided spiral for trimming acrylic, wood and MDF.
- · Small pin diameter for access into tight corners.
- Ideal for cleaning up edges for sign making.
- Up-cut and down-cut versions to suit application.
- Down-cut for better clamping when machining small workpieces and improved finish on the tops of the board.


	D mm	C mm	OL mm	Product Ref.	Shank Dia.
	3.2	9.5	50.8	S64/01	£45.22 +
D	3.2	9.5	50.8	S64/01LH	£45.22 +




### STC MINI ENGRAVER FOR CNC MINI

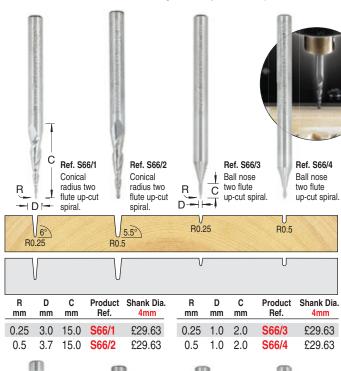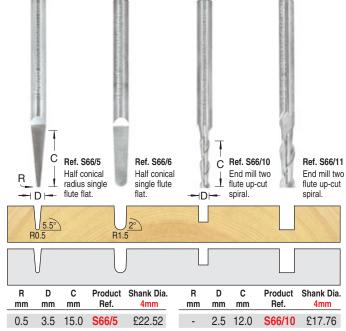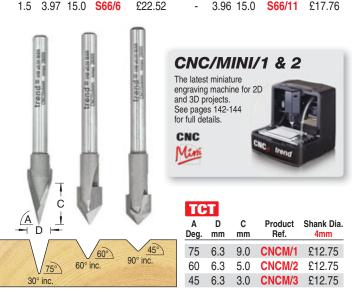- Solid Carbide for long life with 4mm shank.
- · Available to suit various material including wood, acrylic and ABS plastic.







## **WINDOW INDUSTRY CUTTERS**





SUPER HIGH SPEED STEEL

### SINGLE PIECE HIGH SPEED STEEL TOOLING FOR THE WINDOW INDUSTRY.

- Turned and milled from a single piece.
- Used to rout aluminium and extrusion.
- Super High Speed Steel.
- Cutters are designed to plunge and machine or mill lateral slots. Other tools are designed to drill, mill and countersink slots in both plastic and non-ferrous metal.
- All aluminium cutting tools should be used with a coolant, wax stick or lubricant.
- Material should be securely clamped.



### **ROUTER CUTTER GRADES**

HSS

### **High Speed Steel**

These are made from a single piece of High Speed Steel, ground with a very fine edge. They are only suitable for non-abrasive materials, but will give a superior finish.

### HSSE

### Super High Speed Steel

This is a specially developed grade of High Speed Steel, precision ground to the highest tolerances.

HSSE grade cutters are used for specialised applications, typically in the window industry for machining aluminium and uPVC extrusions.

### SUITABLE FOR:

Aluminium & uPVC Extrusion



### PLUNGE SLOTTING / ROUTING UP-CUT HELICAL FOR ALUMINIUM AND UPVC

Single flute helical for drilling and slotting, cutting aluminium, anodised duralium and uPVC plastic. Ideal for recessing and slotting extrusions. HSSE is a special grade for machining the most abrasive anodised finishes.

Refs. 50/15 to 50/23 & 50/52 have narrow necks for deep entry into second web of extrusions.



### Ref. 50/08





### HSSE

SINGLE FLUTE UP-CUT HELICAL						
D	С	OL	Product	SI		
mm	mm	mm	Ref.	1/4"	8mm	10mm
3.0	12.0	60.0	50/03	£23.69	£20.90	-
4.0	12.0	60.0	50/04	-	£21.57	-
5.0	12.0	60.0	50/05	£23.69	£19.46	-
5.0	14.0	120.0	50/50	-	£31.36	-
5.0	18.0	60.0	50/25	-	£22.23	-
5.0	35.0	80.0	50/26	-	£45.25	-
5.0	40.0	100.0	50/27	-	£49.38	-
6.0	14.0	60.0	50/06	£26.47	£21.57	-
7.0	14.0	60.0	50/07	-	£23.69	-
8.0	14.0	80.0	50/08	£23.69	£19.46	-
8.0	14.0	120.0	50/51	-	£31.96	-
9.0	14.0	80.0	50/09	-	£26.47	-
10.0	14.0	80.0	50/10	£32.03	£26.47	-
10.0	14.0	120.0	50/14	-	-	£40.10



8.0

14.0

100.0

50/20

£55.02

68.0

## HSSE

## WATER SLOT SINGLE FLUTE UP-CUT HELICAL FOR ALUMINIUM & UPVC

These tools have a single flute helical with normal necks, but long shanks for water slot. For drilling and slotting aluminium and uPVC.



Ref. 50/31



D mm	C mm	OL mm	Product Ref.	Shank Diameter 8mm
5.0	40.0	100.0	50/27	£49.38
6.0	40.0	100.0	50/31	£41 02

## HSSE

## STRAIGHT TWO FLUTE FOR ALUMINIUM & PLASTIC

For grooving and profiling of aluminium and soft plastics.







D mm	C mm	OL mm	Product Ref.	Shank Diameter 1/4"
6.3	12.7	65.0	55/1	£19.46

## HSSE

WATER SLOT STRAIGHT SINGLE FLUTE FOR UPVC PLASTIC

These single flute straight cutters are used for drilling and slotting uPVC plastic. The long shanks are ideal for water slot routing.

Ref. 50/34







_			D mm	C mm	OL mm	Product Ref.	Shank Dia. 8mm
İΙ	$\parallel$ ĭ	1	4.0	25.0	100.0	50/34	£41.89 +
ç			5.0	35.0	80.0	50/35	£44.58 +
			5.0	30.0	100.0	50/36	£45.92
나	) <del>-</del>		6.0	48.0	90.0	50/39	£44.58 +

## HSSE

## WATER SLOT TWO FLUTE UP-CUT HELICAL FOR UPVC PLASTIC

This two flute helical tool is used for drilling and slotting uPVC plastic. It has a long shank ideal for water slot routing.





50/32


£41.89 +

100.0

## HSSE
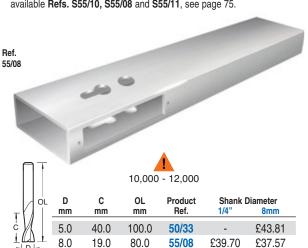
# TWO FLUTE UP-CUT HELICAL FOR NON-FERROUS METAL

Two flute helical cutters suitable for non-ferrous metals with long shank, fine finish and up-cut. Solid Carbide version available **Refs. S55/10, S55/08** and **S55/11**, see page 75.



## HSS

## THREE FLUTE 90° COUNTERSINK FOR ALLOY

5.0

40.0

This countersink can be used at high speeds for countersinking alloy.





D	OL	Product	Shank Diameter 1/4"
mm	mm	Ref.	
12.7	60.0	49/50	£41.69

## CRAFTPRO® ROUTER CUTTERS





Specially designed PTFE coated TCT tooling to meet the needs of the woodworker and tradesman for quality and performance.

- Micro-granular Tungsten Carbide Tips to ensure a perfect finish on softwoods, hardwoods, MDF, plywood and chipboard.
- Highly ground tip face to ensure it maintains its edge.
- PTFE non-stick coating on the body to minimise resin and heat build-up for longer life.
- Extra long shanks, ideal for router table use.
- Bottom cut feature on straights.

# CRAFT<mark>PRO</mark> ROUTER CUTTERS

STRAIGHT FLUTED	
& KITCHEN FITTERS PACKS	73-75
REBATERS	76
PROFILERS	77
TRIMMERS & DRAWER PULL	78-79
CHAMFER	80-81
DOVETAIL & DOWEL DRILLS	81-82
RADIUS & CAVETTO	83
OVOLO & ROUNDING OVER	84-85
HANDRAIL	85
OVOLO JOINTERS	
& SCRIBERS	86
BEADS & CORNER MOULDS	87
OGEE	88-89
PROFILE SCRIBING	90
PANEL RAISERS &	
PANEL DOOR SETS	91-93
SLOTTING & GROOVING	94-95
WEATHERSEAL CUTTERS	
& INTUMESCENT RECESSING	96-97
PLASTICS & COMPOSITES	98
JOINTING	98

## **SUITABLE FOR:**





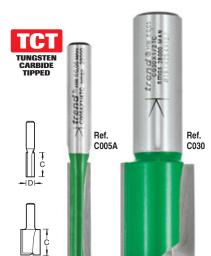


Hardwoods



Man-made Boards





STRAIGHT FLUTED

## TWO FLUTE STRAIGHT

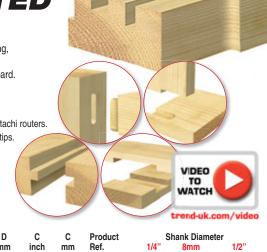
- Suitable for a wide range of applications such as engraving, grooving, rebating and shallow mortising.
- Use on softwoods, hardwoods, MDF, plywood and chipboard.
- All cutters have a bottom cut feature.

## **KEY TO PRODUCT REFERENCES**

Suffix M = Short shank for Makita 3600B & 3612BR, Ryobi & Hitachi routers.

- ★ These cutters have Solid Carbide inserts rather than brazed tips.
- Centre tip for plunge cutting in abrasive materials.
- H Extra long shank 70mm overall length for Trend Hinge Jigs.
- w For use with Trend Worktop Jigs.
- L For use with Trend Lock Jigs.
- c For compact worktop bolt recess.

Note Dimensions in **bold** denote exact size.




D	D	С	С	Product			Shank Di	ameter		D	D	С	С	Product		hank Diamet	
inch	mm	inch	mm	Ref.	1/4"	8mm	3/8"	12mm	1/2"	inch	mm	inch	mm	Ref.	1/4"	8mm	1/2"
5/64	2.0	-	5.0	C001C	★£16.03	-	-	-	-	1/2	12.7	2-1/2	63.0	C164	-	-	<b>w</b> £25.79
-	2.5	5/16	8.0	C001E	★£15.22	-	-	-	-	-	13.0	-	20.0	C164A	N £23.74	-	-
	3.0	3/8	9.5	C001A	★£12.59	★£12.59	-	-	-	9/16	14.3	3/4	19.1	C023	£18.14	-	-
-	3.0	7/16	11.1	C001D	★£16.67	-	-	-	-	-	14.0	3/4	19.0	C023A	£17.47	£16.96 +	-
1/8	3.2	3/8	9.5	C001	★£16.03	-	-	-	-	-	14.0	-	25.0	C023B	-	£18.14	-
1/8	3.2	1/2	12.7	C001B	★£16.67	-	-	-	-	-	14.0	-	50.0	C023C	-	-	£35.73
-	3.4	-	11.0	C001F	N £16.23	-	-	-	-	-	14.0	-	70.0	C023D	-	- <u>N</u>	£37.83
5/32	4.0	7/16	11.1	C002	★£15.35	-	-	-	★£15.35	9/16	14.3	1	25.4	C024	£18.14	- '	-
5/32	4.0	5/8	16.0	C002A	★£15.35	-	-	-	-	-	15.0	-	25.0	C024A	£17.08	-	£18.53
3/16	4.8	7/16	11.1	C003	★£15.35	-	-	-		19/32	15.0	1-3/8	35.0	C024B	-	-	£19.83
13/64	5.0	5/8	16.0	C004	★£15.86	★£15.86	-	-	★£17.53	19/32	15.0	2	50.0	C024C	-	-	£35.73
-	5.5	-	19.0	C004A	N £21.07	-	-	-	-	5/8	15.9	1/2	12.7	C125	£13.23	-	-
15/64	6.0	5/8	16.0	C005	£11.11	£11.11	-	-	c£13.23	5/8	15.9	3/4	19.1	C025	£18.14	- 010.01	-
-	6.0	-	20.0	C005B	£11.92	-	-	-	-	5/8	15.9	1	25.4	C026	£18.79	£18.24 🕇	
- 4/4	6.0	-	25.0	C005A	£17.55	£17.55	-	-	£21.17	5/8	15.9	1-1/4	32.0	C025C	-	-	£27.79
1/4	6.3	-	11.0	C006B	N £16.75	-	-	-	-	5/8	15.9	2-1/4	63.0	C025E	- 040.44	-	£42.35
1/4	6.3	1/2	12.7	C006	£11.92	-	-	-	-	5/8	16.0	3/4	19.0	C025A	£18.14	£18.14	£21.17
1/4	6.3	5/8	15.9	C006A	£10.48	- 040.40	-	-	-	5/8	16.0	-	25.0	C025B	-	£18.79	-
1/4	6.3	3/4	19.1	C007	£10.48	£10.48	-	-	-	5/8	16.0	2	51.0	C025D	- 040.07	-	£37.57
1/4	6.3	1	25.4	C008	£13.23	£13.23	-	-	£13.23	11/16	17.5	3/4	19.1	C027	£16.67	-	-
9/32	7.1	3/4	19.1	C009	£10.48	-	-	-	-	11/16	17.5	1	25.4	C028	£16.67	- 010.11	-
9/32	7.1	1	25.4	C010	£13.23	-	-	-	-	-	18.0	-	25.0	C028A	£18.14	£18.14	£22.51
19/64	7.5	3/4	19.1	C010A	£16.32	- 011 00	-	-	-	-	18.0	2	50.0	C028C	-	-	£39.66
5/16	7.9	3/4	19.1	C011	£11.92	£11.92	-	-	-	23/32	18.2	3/4	19.1	C028B	005.00	-	£21.94
5/16	7.9	1	25.4	C012	£13.23	£13.23	-	-	£13.23	23/32	18.2	- 0/4	21.0	C028C	£25.90	040.07	-
-	8.0	3/4	19.0	C012C	- 010.00	- 010.00	-	-	c£20.31	3/4	19.1	3/4	19.1	C029	£16.67	£16.67	- 010.14
23/64	8.0	-	25.0	CO12A	£13.23	£13.23	-	-	- 01F 00	3/4	19.1	17/16	25.4	C030	£18.14	-	£18.14
3/8	<b>9.0</b> 9.5	3/4 <b>3/4</b>	<b>19.0</b> 19.1	C012B C013	£12.59 £13.23		-	-	£15.88 £12.78	3/4	19.1 19.1	17/16 2	37.0 50.0	C030E C030B	-		£37.83 £37.05
3/8	9.5	1	25.0	C014	13.23	- N	£23.74	-	112.70	3/4	19.1	2-1/2	63.0	C030F	-	-	£57.05 £55.39
3/8	9.5	1	25.4	C014	£13.91	- IN	123.74	-	£13.44	3/4	20.0	2-1/2	20.0	C030A	£18.14	£18.14	100.09
3/8	9.5	1-1/4	31.8	C014	£15.35	£15.35		-	£13.44 £13.91	-	20.0	1	25.0	C030A	10.14	210.14	£23.81
25/64	10.0	3/4	19.1	C015	£15.35	£15.76	-		£15.76	-	20.0	17/16	37.0	C030D	-	- 1	£41.15
25/64	10.0	1	25.0	C016C	£17.87	213.70		-	£17.87	13/16	20.6	3/4	19.1	C030D	£18.14		241.15
25/64	10.0	1	30.0	C016D	£17.07	_	-	-	£17.07 N £28.07	53/64	21.0	3/4	19.0	C031B	£17.70		-
25/64	10.0	-	35.0	C016A		-			£15.35	-	22.0	3/4	19.0	C031B	£22.66		-
25/64	10.0	1-1/4	32.0	C016B	-	£15.35	-	-	-	-	22.0	1	25.0	C031C	-	- 1	£29.17
7/16	11.1	3/4	19.1	C017	£15.76	-	_	_		7/8	22.2	3/4	19.1	C032	£18.14		
7/16	11.0	1	25.0	C017A	210.70	_	_	_	N £23.22	7/8	22.2	-	31.0	C032B	210.17	- 1	£36.71
7/16	11.1	1	25.4	C018	£15.35	_	_	_	-	-	24.0	3/4	19.0	C032C	N £36.71		£32.13
7/16	11.1	1-1/4	32.0	C018A	£16.03	-	-		-	1	25.0	1	25.0	C032D	200.71	-	£31.64
15/32	12.0	3/4	19.1	C019	£15.35		-	-	£18.53		25.0	3/4	19.0	C033A	£21.57	£21.57	-
15/32	12.0	3/4	19.0	C019A	H <b>♦</b> £20.25	H <b>♦</b> £20.25	-	-	-	1	25.4	3/4	19.1	C033	£21.57	-	£21.57
15/32	12.0	1	25.0	C019B	-	-	-	-	£18.53	1	25.4	1	25.0	C033B	-	-	£29.12
15/32	12.0	1-1/4	32.0	C171	£18.14	£18.14	-	-	£20.25	1	25.4	17/16	37.0	C033C	-	-	£43.66
15/32	12.0	1-1/2	38.0	C171A	-	-	-	-	£21.17	1-1/32	26.0	1	25.0	C033E	-	-	£38.36
15/32	12.0	2	50.0	C200	-	-	-	-	£17.47	1-1/16	27.0	1-1/4	32.0	C033F	-	-	£39.70
15/32	12.0	2		C200D	-	-	-	<b>♦</b> £25.79	<b>♦</b> £25.79	1-7/64	28.0	1	25.0	C033G	-	-	£43.66
15/32	12.0	2-1/2	63.0	C172	-	-	-	£25.79	£25.79	1-1/8	28.5	1	25.0	C033H	-	-	£43.66
15/32	12.0	2-1/2	63.0	C172M	-	-	-	-	£31.36	1-3/16	30.0	1	25.0	C033J	-	-	£44.99
15/32	12.0	2-1/2		C172D	-	-	-	-	N £29.95	1-1/4	31.8	1	25.0	C033K	-	-	£44.99
31/64	12.55	1	25.4	C021A	£16.03	£16.03	-	-	-	1-3/8	35.0	1	25.0	C033N	-	-	£47.65
1/2	12.7	1/2		C124	£11.92	-	-	-	-	1-1/2	38.1	1	25.0	C033P	-	-	£55.58
1/2	12.7	3/4	19.1	C020	£15.35	-	-	-	-	1-37/64		1	25.0	C033Q	-	-	£58.24
1/2	12.7	1	25.4	C021	£16.67	£16.67	-	-	£16.67	1-5/8	41.3	1	25.0	C033R	-	-	£51.60
1/2	12.7	1-1/4	31.8	C022	£18.14	£18.14	-	-	£20.25	1-3/4	44.5	1	25.0	C033T	-	-	£59.55
1/2	12.7	1-1/2	38.0	C022A	-	-	-	-	£21.57	1-7/8	47.6	1	25.0	C033V	-	-	£59.55
1/2	12.7	2		C153	-	-	-	-	w£18.14	1-31/32		1	25.0	C033W	_	-	£60.85
1/2	12.7	2	50.0	C153D	-	-	- V	<b>v</b> ❖£28.58	<b>w</b> ❖ £28.58	2	50.8	1	25.0	C033Y		-	£60.85
1/2	12.7	2		C153M	-	-	-	-	w£18.14						_		

## SINGLE FLUTE STRAIGHT

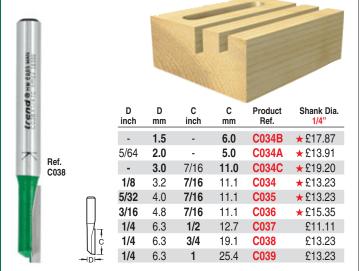- Single fluted Tungsten Carbide straight cutters for fast free cutting.
- Single flutes should be chosen where speed and clearance rates are more important than the finish.
- · Depth of cut should not exceed cutter diameter.







## **MORTISE & TENON CUTTER SETS**

- Set of five long reach straight cutters with diameters of 1/4" to 5/8".
- Suitable for use with the Trend Mortise & Tenon Jig.
- Each set comprises one of each of the individual cutters below.







Dowel joints

С Product mm Ref. 25.4 C008 25.4 C012 3/8 9.5 1-1/4 31.8 C015 1/2 12.7 1-1/4 31.8 C022 5/8 C026

25.4

Sets comprising cutters above

15.8

With 1/4" shank With 8mm shank With 1/2" shank

SET/MT1X1/4TC SET/MT1X8MMTC SET/MT1X1/2TC

See page 153 for full details.

## ASSOCIATED PRODUCTS

## **MORTISE & TENON JIG**



## COMPLETE ROUTING BOOK

An essential read for all router users. Written by Alan Holtham. See page 182 for





## KITCHEN FITTERS PACKS FOR KITCHEN WORKTOPS





)	Product Ref.	Price
	CR/KFP/1	£81.37
D mm	C mm	Product Ref.
12.7	50.0	C153DX1/2TC
12.7	63.0	C164X1/2TC
12.7	25.4	C116X1/4TC
	<b>D mm</b> 12.7 12.7	D mm         C mm           12.7         50.0           12.7         63.0



<b>PACK 3</b> - 15 p	oiece	Product Ref.	Price	
1/2" shank	CR	/KFP/3		£70.93
12mm shank	CR	/KFP/3X12	MM	£70.93
Comprises:	D mm	C mm	Pr	oduct Ref.
1x worktop cutter	12.7	50.0	C15	3DX1/2TC
1x biscuit jointer	37.2	4.0	C15	2X1/2TC
3x metal connecting	g bolts			
10x No. 20 biscuits				
Includes bearings for I	No.0, No.10	& No.20 biscu	its.	



PACK 4 - 5 piece											
(with TC centre tip)		Product Ref.	Price								
1/2" shank		CR/KFP/4	£112.61								
Comprises:	D mm	C mm	Product Ref.								
5x worktop cutter	12.7	50.0	C153DX1/2TC								



(no centre tip)		Product Ref.	Price
1/2" shank		CR/KFP/5	£78.60
Comprises:	D mm	C mm	Product Ref.
5x worktop cutter	12.7	50.0	C153X1/2TC

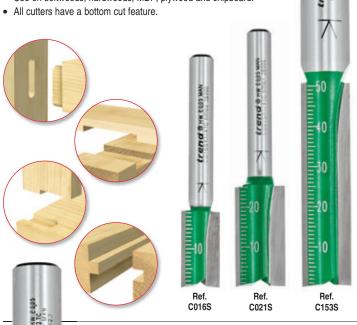






## TWO FLUTE METRIC SCALE

- Suitable for a wide range of applications such as grooving, rebating and shallow mortising.
- Etched with metric scale on body to aid depth setting.
- Use on softwoods, hardwoods, MDF, plywood and chipboard.






D inch	D mm	C inch	C mm	Product Ref.	Shank D	iameter 1/2"
25/64	10.0	3/4	19.0	C016S	£16.67	-
1/2	12.7	1	25.4	C021S	£18.14	£18.14
1/2	12.7	2	50.8	C153S	-	£19.46

## **MORTISER**

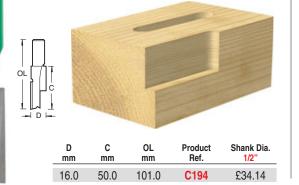- TCT cutter with staggered cutting tips.
- Deep mortising and grooving giving good chip clearance.
- For lock mortising, two width cuts will be needed to achieve the standard 19mm mortise.
- Will plunge and clear chips to a depth of 70mm in a number of passes.
- Take several passes to avoid cutter breakage and motor overload.




## TWO FLUTE POCKET CUTTER

• Two flute cutter with extra long shank.

V CCCOO GHE COOS

- Deep grooving, rebating and mortising.
- Useful for template work when thickness of template restricts depth.
- ▲ Extra care must be taken to avoid breakage.

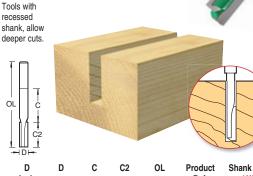  Take more passes than usual, and only cut up to half the diameter of the cutter in one pass.




D	D	C	C2	OL	Product	Shank Dia.
inch	mm	mm	mm	mm	Ref.	1/4"
1/4	6.3	19.0	19.0	70.0	C007L	£18.53

## **HINGE RECESSER**

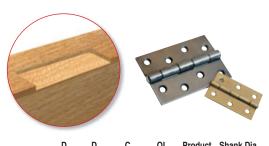\$5.50 CO C Na 2025 HAN

C236

- Two flute TC cutters giving good chip clearance.
- Ideal for shallow lateral routing cuts such as recessing hinges.
- Corners will require final trimming square with a hand chisel or a corner chisel.



τn	D inch	D mm	C mm	OL mm	Product Ref.	Shank Dia. 1/4"
	1/2	12.7	19.0	60.0	C235	£19.83
	5/8	15.9	19.0	60.0	C236	£20.51
	3/4	19.1	19.0	60.0	C237	£21.84

# SHANK MOUNTED BEARING GUIDED HOUSING CUTTER • Creates grooves and trenches in boards. • Bearing follows template. • For rebating and housings.

	D mm	C mm	B mm	Product Ref.	Shank E	Diameter
2	19.1	11.1	19.1	C226	£33.09	£33.09

## REBATE CUTTERS



D	C	E	Product	Shank Dia.
mm	mm	mm	Ref.	1/2"
50.8	22.5	19.1 & 15.9	N C040A	

12.7 mm

Ring Dia.

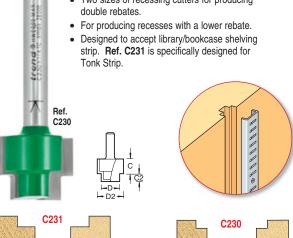


## Alternative size rebates using alloy bearing rings below

Rebate E mm	Ring Dia. mm	Product Ref.	Price
3.2	44.4	BR/444	£8.35
4.75	41.3	BR/413	£8.35
6.35	38.1	BR/381	£8.35
9.5	31.7	BR/317	£8.35
12.7	25.4	BR/254	£5.96
14.3	22.2	BR/222	£5.96
15.1	20.6	BR/206	£5.96
15.9	19.1	BR/191	£5.96
17.45	15.9	BR/159	£5.96
18.25	14.3	BR/143	£5.96

## STEPPED REBATER

• Two sizes of recessing cutters for producing



D	D2	С	Shank Diameter			
mm	mm	mm	mm	Ref.	1/4"	1/2"
9.5	19.0	13.0	6.0	C231	£34.39	£34.39
13.0	19.0	10.0	6.0	C230	£44.99	-

## **BEARING GUIDED REBATE SETS** Francis SHR CESS MAN These cutters are self-guiding and can be used to produce rebates, lap joints, tongues and rebated corners. Ref. C040 E = Rebate D С В B2 Product **Shank Diameter**

## 12.7 SUPPLIED WITH TWO BEARINGS

mm

12.7

mm

9.5

9.5

Ref.

C193

C040

£36.14

£30.56

mm

31.8

35.0

mm

15.9

12.7

C193 Rebate	C040 Rebate	Bearing Dia. mm	Product Ref.	Price
9.5	11.1	12.7	B127	£7.81
11.1	12.7	9.5	B95	£6.48

When using bearing Ref. B95A make a minimum of two passes when a full depth of cut is required.

1/2

£36.14

£35.46

8mm

£30.56

### **ALTERNATIVE BEARINGS** C040 C193 Product Rebate Rebate Ref. Price B25A 5.0 £11.92 3.4 4.9 **B22A** £11.92 6.5 6.35 **B19A** £8.35 7.9 7.9 9.5 **B16A** £6.62





Ideal with delicate applications such as musical instrument production, when a small rebate is required for insertion of purfling.

D mm	C mm	Product Ref.	Shank Diameter 1/4"
24.0	12.7	N C193A	£51.29

## SUPPLIED WITH THREE BEARINGS

Rebate E mm	Bearing Dia. mm	Product Ref.	Price
1.0	22.0	B22	£11.06
2.5	19.0	B19	£5.18
4.0	16.0	B16	£4.64









VIDEO

# TCT TUNGSTEN CARBIDE

Crend SHW 2003 WA

## TEMPLATE PROFILERS

## **GUIDED TEMPLATE PROFILER**


Shank mounted bearing profilers are ideal for template guidance. Use for rebating and trimming edges only.


▲ Extra care must be taken to avoid cutter breakage.

A max. 3mm overlap should be left before copy profiling.









801	
80	
121	
BX1	
166	
90	
110	
7	Ref.
	C166B
100	Sin .
3	
1000	100
100	

D mm	C mm	B mm	Product Ref.	1/4"	Shank D	iameter 12mm	1/2"
9.5	6.35	9.5	C121G	£14.84	-	-	-
9.5	12.7	9.5	C121H	£18.88	-	-	-
9.5	25.0	9.5	C121P	£29.20	-	-	-
12.7	4.0	12.7	C121K	£19.43	-	-	-
12.7	6.35	12.7	C121N	£22.36	-	-	-
12.7	9.5	12.7	C121B	£21.17	-	-	-
12.7	12.7	12.7	C121F	£23.21	-	-	-
12.7	25.4	12.7	C121	£20.90	-	-	-
12.7	32.0	12.7	C121D	£23.36	-	-	-
15.9	12.7	15.9	C121E	£23.36	-	-	-
15.9	25.0	15.9	C121C	£33.09	-	-	-
16.0	19.0	16.0	C121A	-	£25.79	-	-
19.0	63.0	19.0	C165B	-	-	-	£52.95
19.1	19.1	19.1	C165	-	-	-	£27.13
19.1	25.4	19.1	C123	£27.13	-	-	-
19.1	50.0	19.1	C166	-	-	£45.25	£45.25
25.0	25.0	25.0	N C166B	-	-	-	£48.62







## BEARING GUIDED 2° & 3° DOOR LEADING EDGE

2° or 3° undercut shank mounted bearing guided router cutters for routing a leading edge on doors to allow a tight fit against jamb.



A Deg.	D mm	C mm	B mm	Product Ref.	Shan 8mm	k Dia. 1/2"
93°	24.2	50.0	19.1	C214	-	£70.93
93°	19.3	38.1	16.0	N C214B	£38.35	-
92°	22.5	50.0	19.1	N C214A	-	£57.89



D

mm

19.1

С

mm

50.0

В


mm

19.1

Product Shank Dia. Ref. 1/2"

£51.48

C199






Ref. C117

**TRIMMERS** TUNGSTEN CARBIDE TIPPED

## **BEARING GUIDED** 90° TRIMMER

Used for trimming plastic or plywood overlays. Also for copy profiling with a template.



A max. 3mm overlap should be left before copy profiling.

D mm	C mm	B mm	Product Ref.	1/4"	Shank Diamet 8mm	er 1/2"
6.35	12.7	6.35	C167	£16.03	-	-
6.35	25.4	6.35	C168	£16.67	£16.67	-
9.5	12.7	9.5	C115	£18.79	£18.79	
9.5	25.0	9.5	C115A	£19.20	-	-
12.7	16.0	12.7	C116A	£17.87	-	-
12.7	25.4	12.7	C116	£19.71	-	£19.71
12.7	38.1	12.7	C196	-	-	£23.69
12.7	50.0	12.7	C195	-	-	£25.79
15.9	15.9	15.9	C117	£21.57	£20.94	-
18.2	14.0	18.2	C117C	£21.31	-	-
18.2	50.0	18.2	C165A	-	-	£52.86
19.1	25.0	19.1	C117A	£25.14	-	£25.14
19.1	50.0	19.1	C117B	-	-	£46.32

## **BEARING GUIDED 90° LOW** PROFILE TRIMMER

- · Self-guided with low profile ball bearing guide and bearing fixing screw.
- For use in restrictive applications or within rebates of minimum 8mm height.
- Down-cut to prevent breakout on veneers.







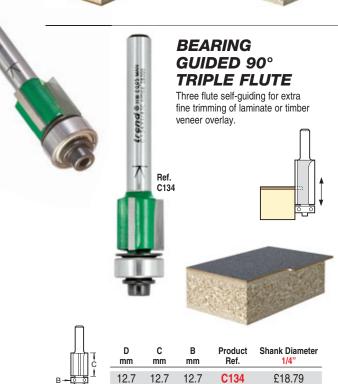
7	A Deg.	D mm	C mm	B mm	Product Ref.	Shank Dia. 1/4"
<u></u>	90°	19.1	16.0	19.1	N C290	£33.00
☐ C	REPL	ACEME	a			
D  -	Bearin	g 19.1r	mmØ		B19A	£8.35
















This preparation trimmer, leaves an overhang of 3mm, for secondary final trim. Life can be extended by varying height of cutter.





c	D mm	C mm	E mm	B mm	Product Ref.	Shank 1/4"	Diameter 8mm
Ţ	12.7	25.4	3.2	19.1	C133	£29.24	£29.24

12.7

25.4

12.7

C205

£21.57

## **COMBI TRIMMER**

- For trimming top & lip.
- Performs 3 functions:
- 1. To top trim the overlay at 90°.
- 2. To trim the overlay at 60°.
- 3. The base of the cutter can trim the vertical lipping at 90°.
- · Requires side-fence or roller bearing.





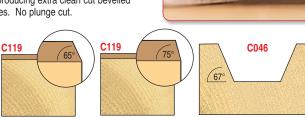




2. Bevel 60° trim 3. Lip 90° trim










D	<u> </u> ⊢				
A Deg.	A2 Deg.	D mm	C mm	Product Ref.	Shank Dia. 1/4"
60°	90°	12.7	12.7	N C047A	£21.58



Ref. C048



Product Shank Dia. Ref C119 £16.67 C119B £19.01

C048

WITH	OUT BE	ARING
A Deg.	D mm	C mm
67°	22.2	10.0

C047

60°


٦	Deg.	mm	mm	Ref.	3nank Dia. 1/4"
	67°	22.2	10.0	C046	£18.79
7	60°	25.4	10.0	C047	£22.23
J	45°	34.9	10.0	C048	£29.90

# **GUIDED PIERCE & TRIM** Cuts out apertures in laminate worktops. frequencial and the bath The nose of the cutter acts as a guide follower.



i	D	С	Product	Sh	ank Diame	eter
)	mm	mm	Ref.	1/4"	8mm	1/2"
	6.3	18.0	C135	£18.79	£18.79	-
	12.7	30.0	C135A	-	-	£32.13








# **DRAWER PULL**

An initial cut with a straight cutter is required to produce this effect.







		NE
> R6		C281
Shan	k Dia.	
1/4"	1/2"	_
£63.60	-	-
	270.05	- 4

	R R2 D		D2				Shank Dia.	
	mm	mm	mm	mm	mm	Ref.	1/4"	1/2"
Ιį	4.0	-	19.0	-	13.0	C305	£63.60	-
) C	5.0	2.0	45.0	24.0	17.0	N C282	-	£79.95
. '	6.0	-	38.0	22.0	17.0	N C281	-	£64.95



C281


# TCT TUNGSTEN CARBIDE TIPPED


## **CHAMFER CUTTERS**

## **CHAMFER 'V' GROOVE**

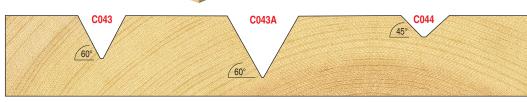
For veining, panelling, 'V' grooving, bevelling and chamfering. 'V' groove tools can be used for engraving and sign writing. They can also be used to hide glue lines.












C045

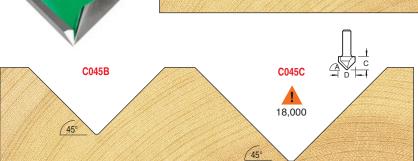(45°




C044A


45°


A Deg.	D mm	C mm	Product Ref.	1/4"	Shank Diamete 8mm	er 1/2"
60°	12.7	11.0	C043	£17.47	£20.29 +	£20.25
$60^{\circ}$	19.0	20.5	C043A	£25.14	-	-
45°	12.7	13.0	C044	£17.47	£18.89 +	£19.46
45°	19.1	16.0	C044A	£21.31	-	£19.83
45°	25.4	11.0	C045	£30.56	-	-
45°	32.0	22.0	C045A	-	-	£42.35
45°	38.0	25.0	C045B	-	-	£43.66
45°	51.0	32.0	C045C	-	-	£74.21


45°

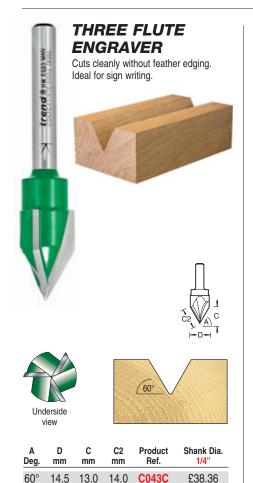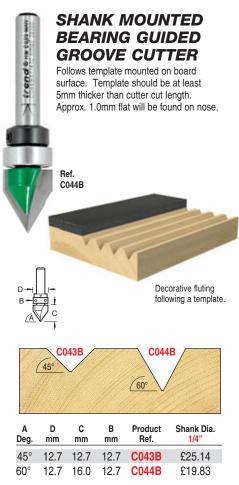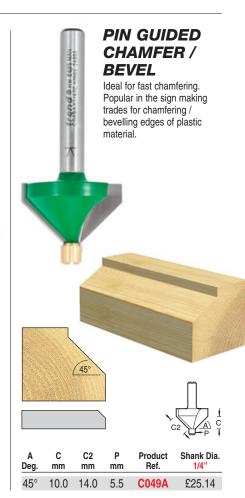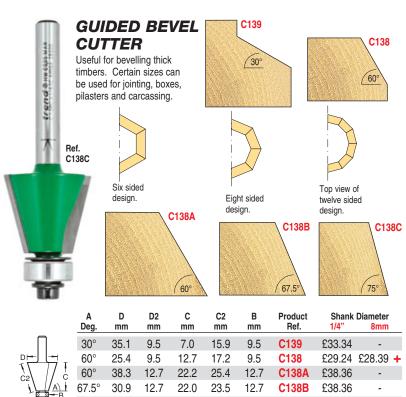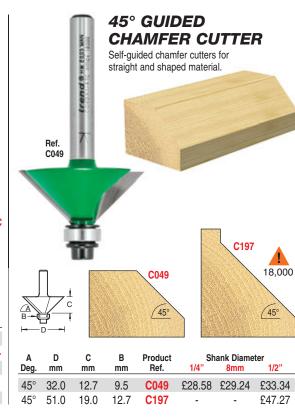
C045A

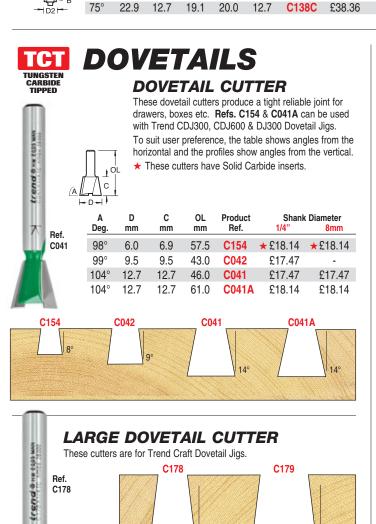


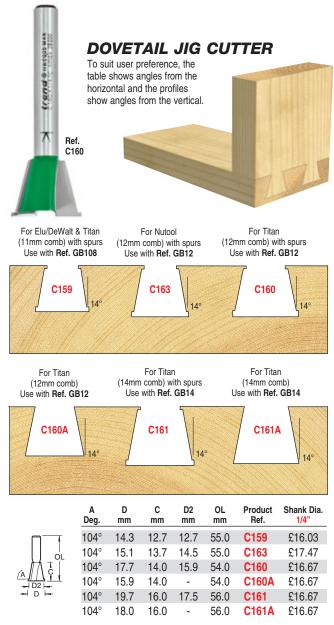












£19.46

**Shank Diameter** 

12mm

£27.13 £27.13 £27.13

£19.46

ח

mm

Deg

98° 12.7

97° 19.0 С

mm

20.0

25.0 65.0

OΙ

mm

60.0

Product

Ref.


C178

## SHANK MOUNTED **BEARING GUIDED DOVETAIL**

These cutters are for use with the Nutool and **Axminster Power Tool** Centre Dovetail Jigs.

Ref.





A Deg,	D mm	C mm	B mm	OL mm	Product Ref.	Shank Dia. 1/4"
104°	12.7	12.7	12.7	63.0	C162	£18.14
104°	15.0	13.5	12.7	63.0	C162A	£18.14





## STAIR HOUSING DOVETAIL


Purpose made for stair housing routing jigs. Ensures tight fit of tread in string.

## Trend Stair Jig Ref. STAIR/A

Recommended cutters for tread thickness:

22mm (7/8") Ref. C240X1/2TC 25.4mm (1") Ref. C241X1/2TC 28.5mm (1-1/8") Ref. C242X1/2TC 32mm (1-1/4") Ref. C243X1/2TC











	Deg.	mm	inch	mm	Ref.	Rotation	1/2"
	95°	13.5	-	20.0	C240	RH	£33.09
Г	95°	16.0	5/8	26.0	C241	RH	£34.39
Ċ	95°	19.0	3/4	26.0	C242	RH	£35.73
7	95°	22.0	7/8	26.0	C243	RH	£37.05

ROUTER HINGE BIT

This machine bit has a specially designed form of scriber to allow use at high speeds. Use

for recessing circular hinges. For accurate




## ROUTER DRILLING ROUTER

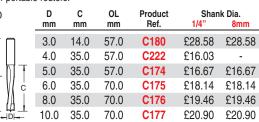
## **DOWEL DRILL**

Lip and spur dowel drills for use with the Trend Craft Dovetail Jig dowelling template. Ref. C174 can be used with the Trend Shelf Support Template.

Refs. C175, C176 and C177 can be used for 6, 8 & 10mm dowels. Can be used in drilling machines or portable routers.

	1	Ĺ	
.000	-	22	2,















D OL Product Shank Dia. Ref. mm mm £45.19 60.0

## ASSOCIATED PRODUCTS



## STAIR **JIGS**

See page 155 for full

Product Ref. STAIR/A STAIR/B



## SHELF **SUPPORTS**

See page 180 for full details.



**Product Ref** SS/B5/12 etc.

## **DOWELS** See page 196 for full details.



Product Ref. DWL/1/50 etc.



## TCT RADIUS & CAVETTO

C052

## **RADIUS**

C050


R1.6

C051

R2 4

These two flute cove style cutters give radiused grooves for decorative panel finishes and board edges. For deep channels, take a series of passes. Ref. C056A is used with the Trend Draining Groove Jig and Ref. C051A is for the drip groove on the Trend Belfast Sink Jig. Ref. C054A can be used for a narrower groove on the Draining Groove Jig. Ref. C054A and C053C can be used with the Trend Hot Rod Jig.

★ These cutters have Solid Carbide inserts rather than brazed tips. C051A



Kard ann caps une

Ref.

C056





	110.0	R4.8
C053A C05	53C C054	C054A
R5 R	6 R6.3	R6.3
C055	C056	C056A
R7.9	R9.5	R9.5
C057	C	058
R11.1	F	112.7 *** *** *** *** *** *** *** *** *** *

C052A

	R mm	D mm	C mm	Product Ref.	1/4"	Shank Diame 8mm	eter 1/2"
Ţ	1.6	3.2	9.5	C050	★£17.47	★£17.47	-
ċ	2.4	4.8	12.7	C051	★£17.47	-	-
-	2.5	5.0	12.7	C051A	-	-	★£25.79
	3.0	6.0	15.0	C052A	★£15.88	-	-
	3.2	6.3	12.7	C052	★£18.14	★£26.47	-
	4.8	9.5	6.3	C053	£19.46	-	-
	5.0	10.0	18.0	C053A	£19.46	-	-
	6.0	12.0	19.0	C053C	-	-	£29.69
	6.3	12.7	7.9	C054	£20.90	£20.90	£20.90
	6.3	12.7	19.0	C054A	-	-	£30.75
	7.9	15.9	9.5	C055	£26.47	-	-
	9.5	19.1	12.7	C056	£28.58	£28.58	£28.58
	9.5	19.1	32.0	C056A	-	-	£34.14
	11.1	22.2	15.9	C057	£29.90	-	-
	12.7	25.4	15.9	C058	£30.56	£30.56	£30.56

## **BEARING GUIDED RADIUS**

Ideally suited for cutting radiused edges at speed, as a side-fence is not required. The guide bearing follows the vertical edge or template.

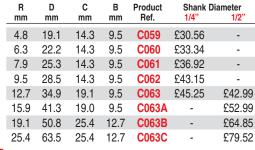
Alternative bearing Ref. B127A creates a shallower radius for tools up to Ref. C063A.















В

Product












Shank Diameter

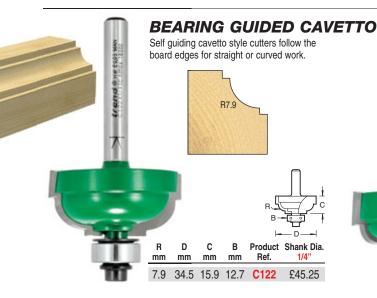







D

R

C060






### **OVOLO & ROUNDING OVER** TUNGSTEN **BEARING GUIDED** VIDEO ROUND OVER & OVOLO C074A TO Self-guiding cutters for rounding over edges do WATCH R1.6 not require a side-fence. They are supplied with two bearings. Legacion annes trend-uk.com/video Use the larger bearing for a round over. If the cutter is lowered, a top quirk can be C074B C074 C074C produced. Bullnose mouldings can also be produced by taking a second pass from the R3.2 R3 R2 opposite side of the workpiece. C075A C076 C075A **C**075 R6.3 R4.8 R6 C078 C077 with alternative bearing. R7.9 R9.5 D С R В B2 **Shank Diameter** R Product inch mm mm mm Ref. mm mm 8mm 1.6 1/16 15.9 7.9 9.5 12.7 C074A £27.79 2.0 5/64 16.7 7.7 9.5 12.7 C074C £29.47 C078A C079 £28.45 3.0 18.7 9.5 9.5 12.7 C074B 3.2 1/8 19.0 9.5 9.5 12.7 C074 £27.79 £27.79 R12.7 4.8 3/16 22.0 C075 £30.56 £30.56 R11.1 12.7 9.5 12.7 C075A 6.0 24.7 12.0 9.5 12.7 £29.78 C076 6.3 1/4 25.4 12.7 12.7 £34.14 £34.14 £34.14 9.5 7.9 C077 £36.92 5/16 28.5 12.7 12.7 £36.92 9.5 9.5 3/8 15.9 12.7 C078 £39.70 £38.54 £39.70 31.7 9.5 11.1 7/16 34.9 18.0 9.5 12.7 C078A £39.03 C079A C198 C079 £43.81 12.7 1/2 38.0 19.1 9.5 12.7 £43.81 £43.81 16.0 44.5 22.0 C198 18,000 5/8 9.5 12.7 £37.57 R16 19.1 3/4 51.0 25.0 9.5 12.7 C079A £52.93 R19. 25.4 63.5 32.0 9.5 12.7 C079B £79.52 31.8 1-1/4 76.5 38.0 9.5 12.7 C079C £95.43 38.1 1-1/2 89.0 50.8 9.5 12.7 C079E £127.26 C079E C079C 12,000 C079B 16,000 12,000 R38.1 R31.8 R25.4 **BEARING GUIDED BEAD OVOLO** This double ribbed ovolo style is an alternative to the standard rounding over cutter. If the cutter is lowered, a top quirk can be produced. Ref. C095






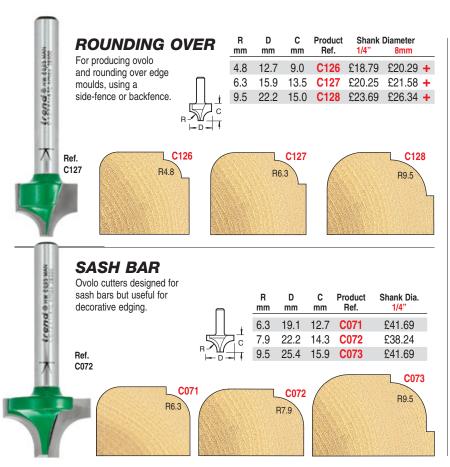
R mm	C mm	B mm	B2 mm	Product Ref.	Shank Dia. 1/4"	
4.0	12.7	9.5	12.7	C094	£37.57	
5.5	17.5	9.5	12.7	C095	£39.70	
	mm 4.0	4.0 12.7	mm         mm         mm           4.0         12.7         9.5	mm         mm         mm         mm           4.0         12.7         9.5         12.7	mm         mm         mm         mm         Ref.           4.0         12.7         9.5         12.7         C094	mm         mm         mm         mm         Ref.         1/4"           4.0         12.7         9.5         12.7         C094         £37.57














STEEDS OF STREET STREET



**BEARING** 

**HANDRAIL** Ref. C190 can be used to form

**GUIDED** 

# **HANDRAIL**

**CUTTERS** 

A self-guiding flat ovolo to give a smooth corner finish. Alternatively, can be used to produce glazing bar profiles.


**FLAT OVOLO** 

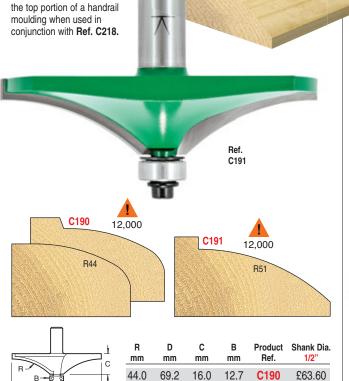
**BEARING** 

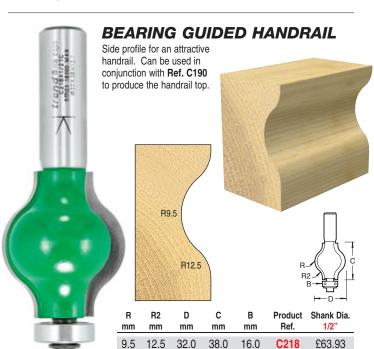
**GUIDED** 

Alternative larger bearing Ref. B127A removes the









51.0

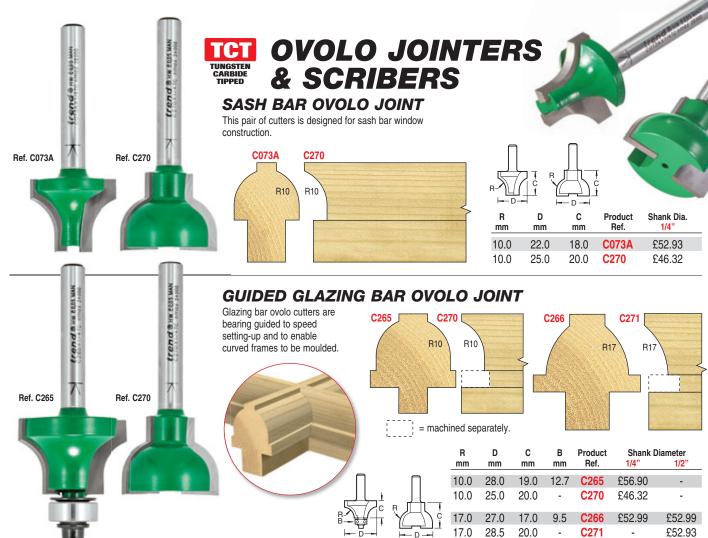
82.7

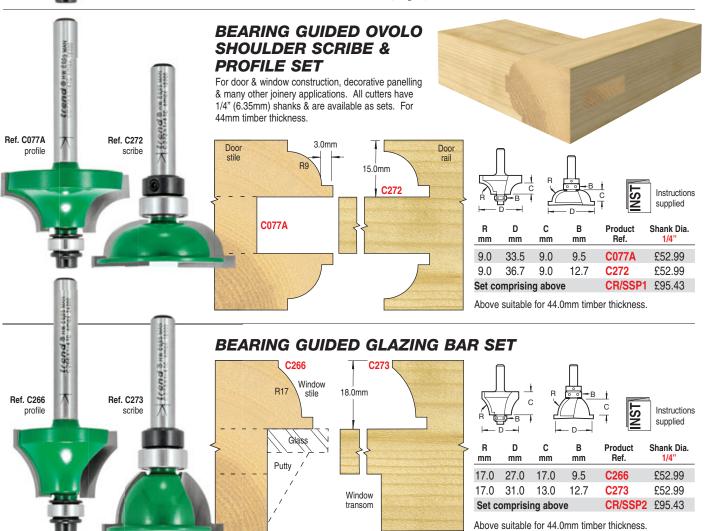
19.0

12.7

C191


£74.21






# TCT TUNGSTEN CARBIDE TIPPED
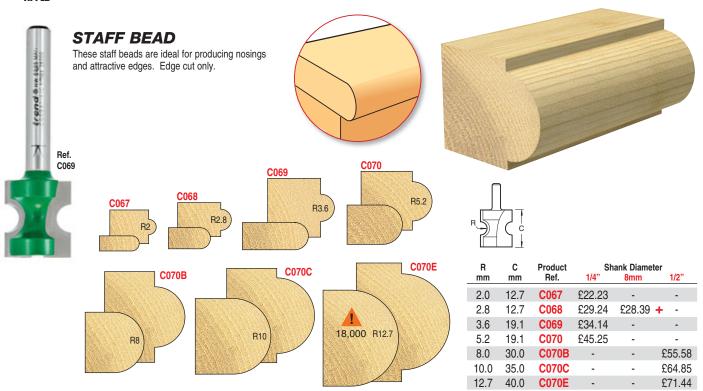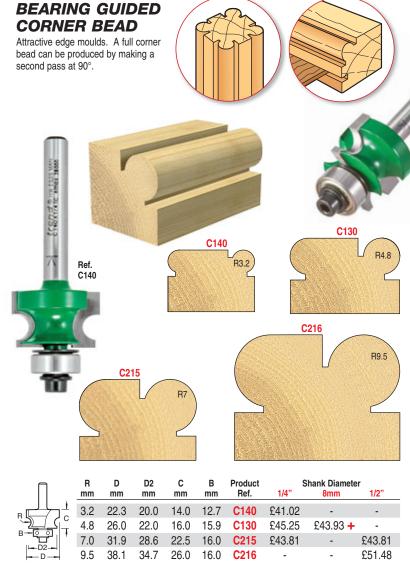
## **BEADS & CORNER MOULDS**








3.2

19.1


11.1


# OGEE CUTTERS TUNGSTEN CARBIDE TIPPED

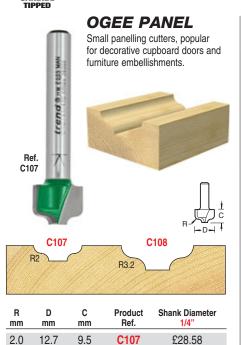



C108

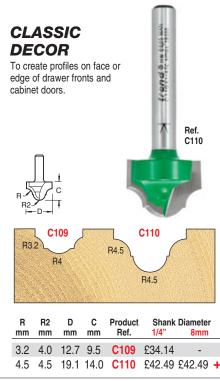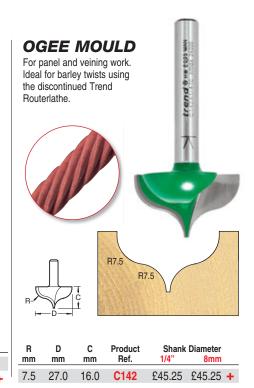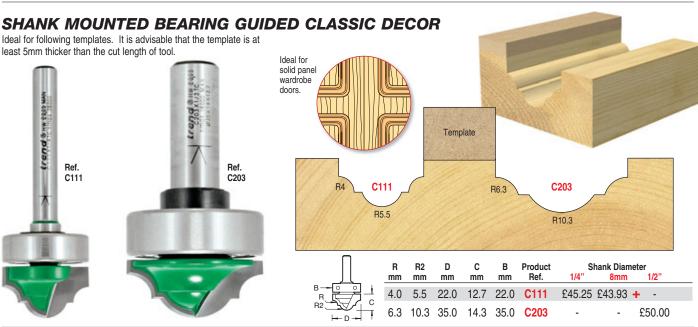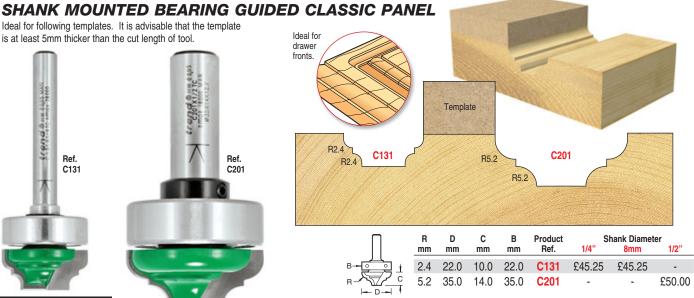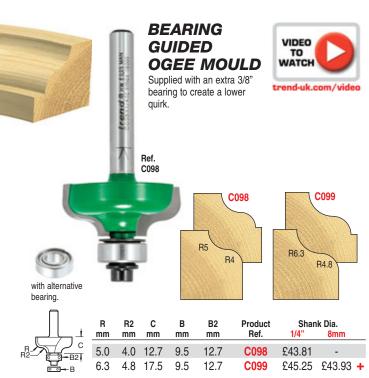
£36.92

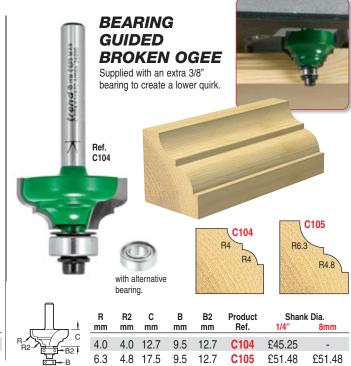


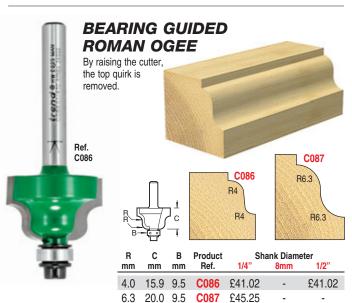


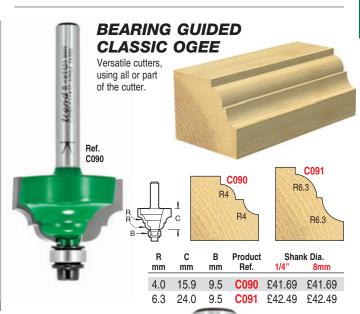


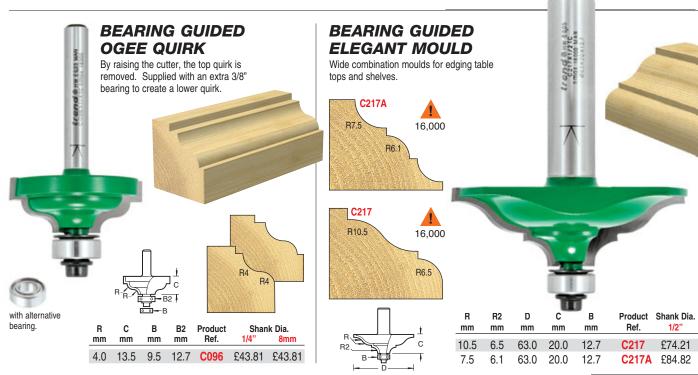














## PROFILE SCRIBING TOOLING

## **COMBINATION & EASYSET**


the arbor to cut the profile or the scribe.

• The classic method of producing cabinet panelled door and

drawer fronts is made easy with these Profile Scriber sets.

• With the combination type, components are re-arranged on

. The Easyset system works by altering the height of the cutter.







Instructions supplied


Timber thickness Min. 18.0mm


Max. 22.0mm



Router table use only. 1/4" and 8mm shanks should only be used in the base may need to be enlarged. A workholding device should be used when cutting the scribe cut on the rail ends. The cutting

# with a medium or heavy duty router. For certain routers the aperture edges should be staggered to each other. When using Easyset cutters, take several passes. When using these sets at the minimum material thickness, the height of the top quirk may be reduced.

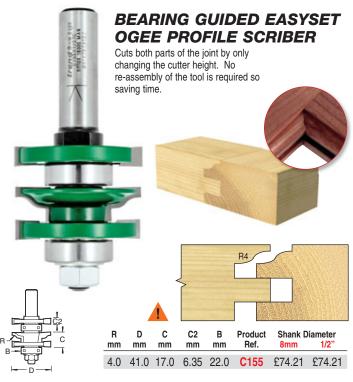

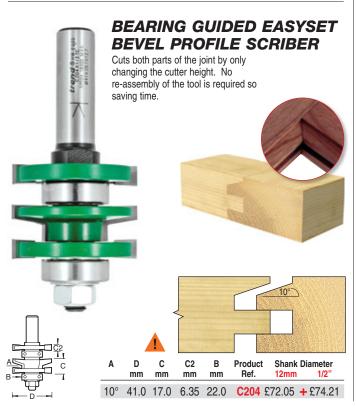

## **BEARING GUIDED COMBINATION OGEE PROFILE SCRIBER**

C

mm

4.0 41.0 17.0 6.35 22.0

mm mm

- D

C2 В

mm

mm

Product

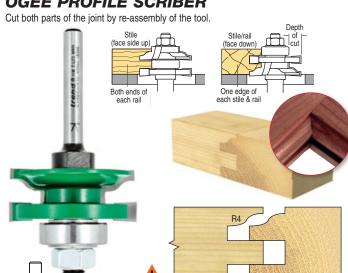
Ref

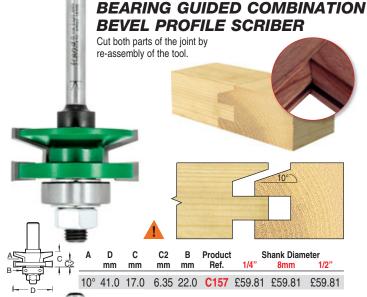
C149

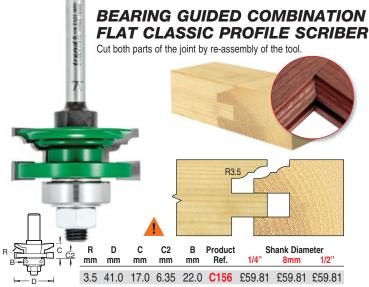
**Shank Diameter** 

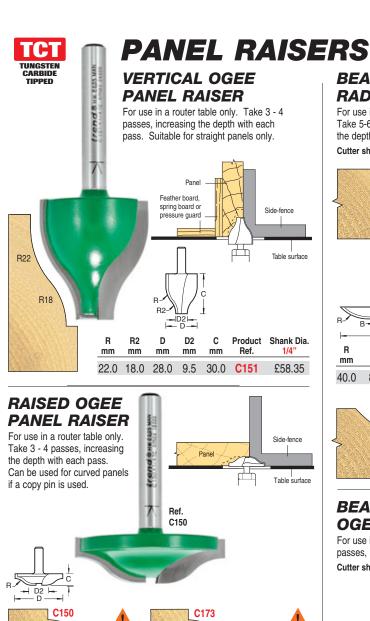
£59.81

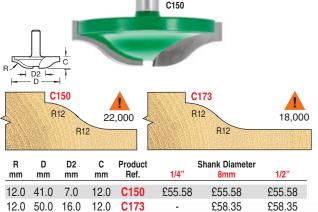
£59.81

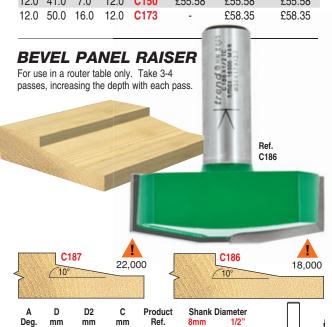


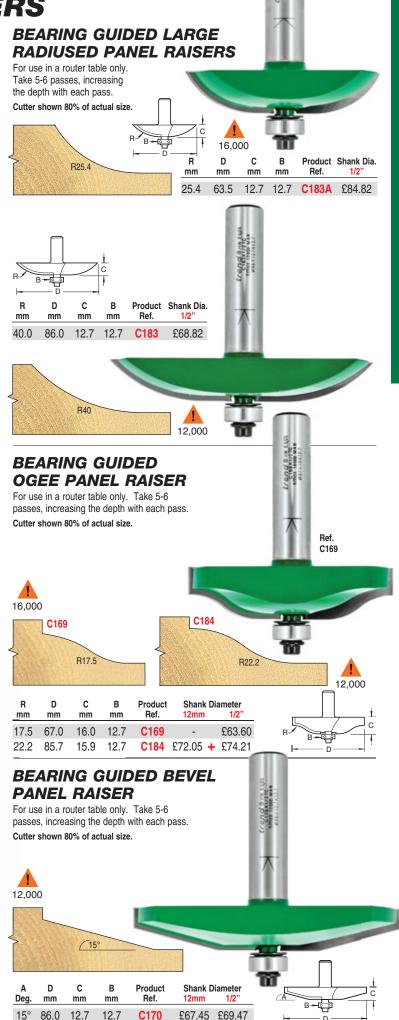












£57.03

--|D2|--

£52.80

17.0

17.0

C186

11.0

16.0

10°

10°

45.0

50.0

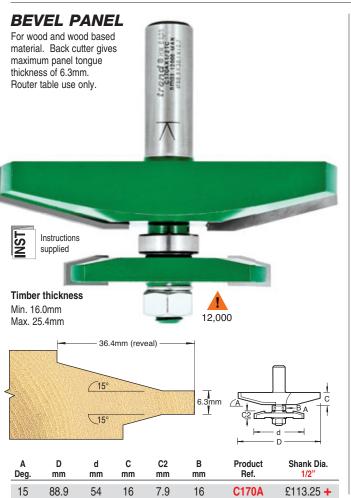
12.7

12.7


£67.45 £69.47


15°






**PROFILE SCRIBING TOOLS & SETS** 

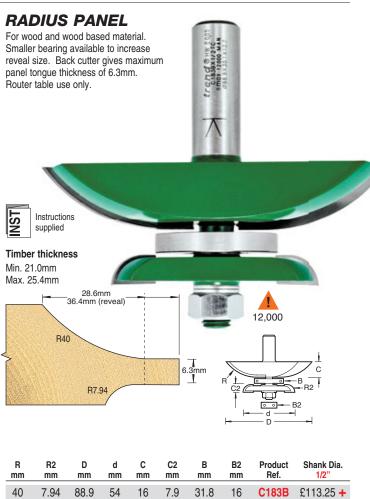






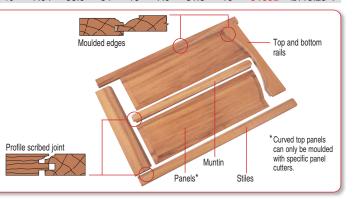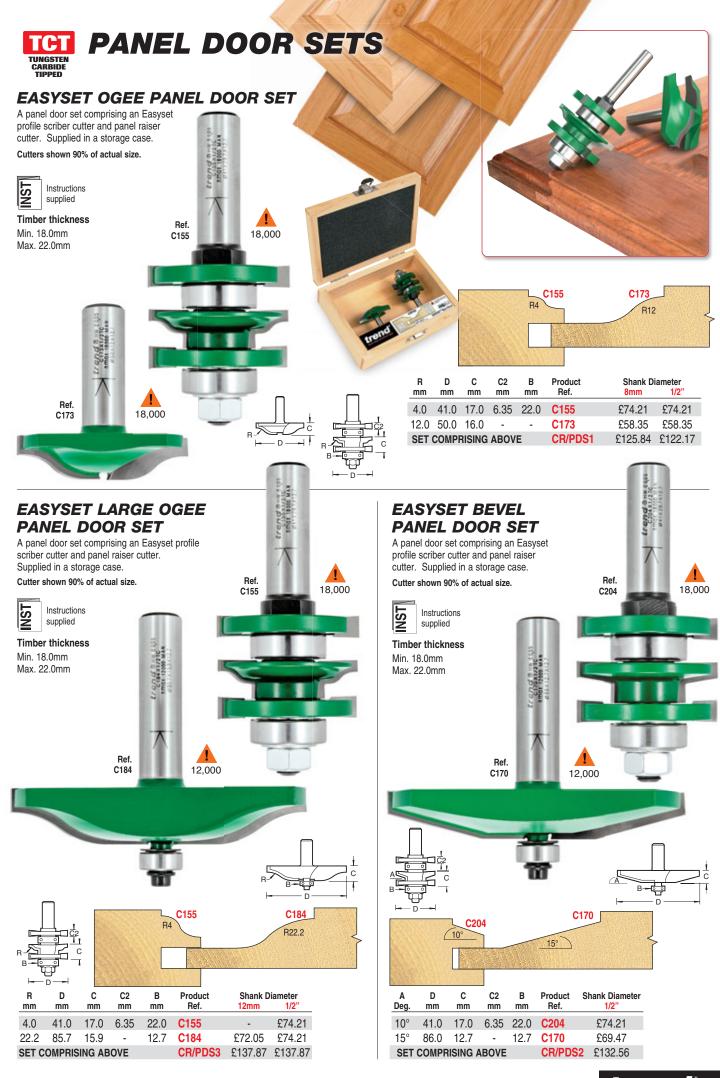






C145A




## **SLOTTING & GROOVING**

## **ONE-PIECE SLOTTING CUTTER**

These two wing Tungsten Carbide Tipped slotting cutters are ideal for grooving and rebating operations. A 12.7mm diameter bearing is supplied with every cutter giving a 9.5mm groove depth. Depth of cut can be changed by purchasing alternative bearing sizes.










C144



C143

Ref.











C144A





2.0

3.0



31.8

31.8

12.7

12.7

9.5

9.5

VIDEO

TO WATCH

trend-uk.com/video



**Shank Diameter** 

8mm

£24.34

1/4"

£22.28

3.2	1/8	31.8	12.7	9.5	C143	£24.34	-
4.0	-	31.8	12.7	9.5	C144A	-	£24.34
4.7	3/16	31.8	12.7	9.5	C144	£24.34	-
6.0	-	31.8	12.7	9.5	C145A	-	£26.47
6.3	1/4	31.8	12.7	9.5	C145	£26.47	-
8.0	5/16	31.8	12.7	9.5	C146	£26.47	-
9.5	3/8	31.8	12.7	9.5	C147	£27.79	-
10.0	-	31.8	12.7	9.5	C148	£27.79	-
BEARIN	IGS		E mm		Product Ref.	Price	)
25.0mr	nØ		3.2		B25A	£11.9	2
22.0mr	nØ		4.8		B22A	£11.9	2
19.0mmØ 6.3		B19A	<b>B19A</b> £8.35				
16.0mmØ 7.9		B16A	<b>B16A</b> £6.62				
SPARE	BEARIN	G	E mm		Product Ref.	Price	)
12.7mmØ 9.5		B127A	£5.18	3			

Product

Ref.

C143B

C143A


## **BEARING GUIDED** ONE PIECE **BISCUIT JOINTER**


This two wing self-guiding Tungsten Carbide Tipped slotting cutter is ideal for biscuit jointing. The set is supplied with three ball bearing guides to suit the three sizes of biscuits available.

A slightly longer cut than the length of the biscuit is required for ease of alignment during assembly.











E= 9.05mm





Profiles showing cross-section of biscuit joints.

No. 0


47.5mm x 15.5mm x 4mm

No. 20 60mm x 23mm x 4mm

Suitable for 19mm + board







	140,000						$\wedge$	X-V-	
C	_	B mm	B2 mm	B3 mm	Product Ref.	1/4"	Shank D	iameter 12mm	1/2"
4.0	37.2	12.7	16.0	19.0	C152	£41.69	£41.69	£41.69	£41.69

C B	S
B2	$\frac{1}{1}$
B3 <del>-</del>	1

SPARE BEARINGS	Product Ref.	Price
12.7mmØ	B127A	£5.18
16.0mmØ	B16A	£6.62
19.0mmØ	B19A	£8.35

# KEYHOLE For picture hanging flush to the wall. Plunge cutter and move forward, then retract out from entry hole. A template is recommended. For No.8 and No.10 screw heads. Not suitable for grooving applications.

Instructions supplied

Product

Ref.

**Shank Diameter** 

8mm

s

 $\boldsymbol{m}\boldsymbol{m}$ 

Trend " HW CODS MAN

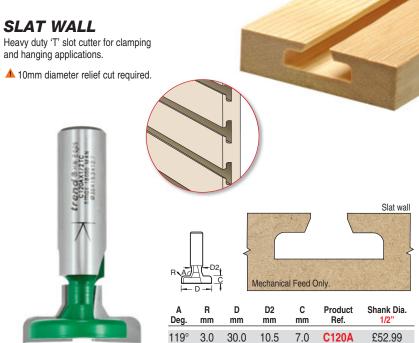
D2

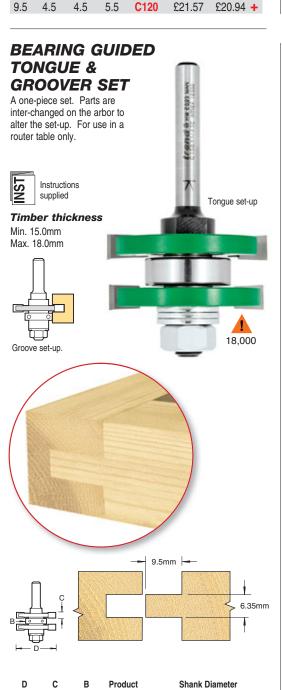
mm

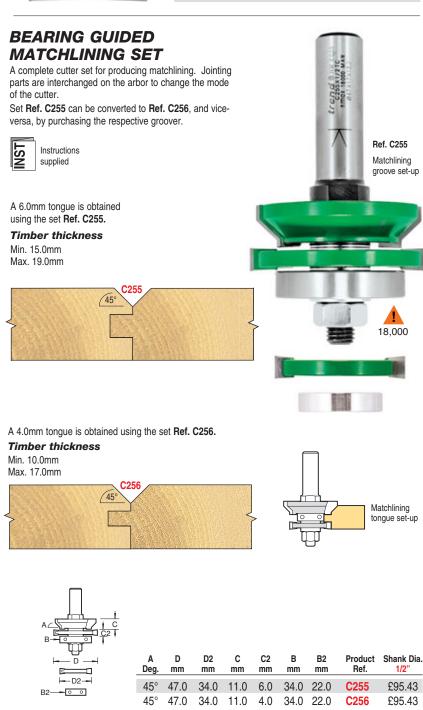
mm

С

mm







£43.81 £43.81

8mm

mm

22.0

mm

mm


Ref.

C158

£43.81



The weatherseal recessers are designed to create a 7mm deep groove near the bottom of a rebate in a door or window frame to accept barbed weatherseals. Four sizes of recesser are offered to suit the most popular sizes of weatherseal.





## WITH 1/4" SHANKS

C mm	D mm	B mm	OL mm	Product Ref.	Shank Dia. 1/4"
2.0	34.0	20.0	55.0	C210A	£42.73
2.5	34.0	20.0	55.0	C211A	£42.73
2.8	34.0	20.0	55.0	C212A	£42.73
3.0	34.0	20.0	55.0	C213A	£42.73

ALTERNATIVE BEARINGS for other groove depths

Groove Depth	Bearing Dia.	Product	
mm	mm	Ref.	Price
5.0	24.0	BB24	£10.85
6.0	22.0	<b>BB22</b>	£11.11
7.5	19.0	BB19	£11.06
8.0	18.0	BB18	£10.85

## WITH 1/2" SHANKS

C mm	D mm	B mm	OL mm	Product Ref.	Shank Dia.
2.0	36.0	22.0	80.0	C210	£43.81
2.5	36.0	22.0	80.0	C211	£43.81
2.8	36.0	22.0	80.0	C212	£43.81
3.0	36.0	22.0	80.0	C213	£43.81
	2.0 2.5 2.8	mm mm  2.0 36.0  2.5 36.0  2.8 36.0	mm         mm         mm           2.0         36.0         22.0           2.5         36.0         22.0           2.8         36.0         22.0	mm         mm         mm         mm           2.0         36.0         22.0         80.0           2.5         36.0         22.0         80.0           2.8         36.0         22.0         80.0	mm         mm         mm         Ref.           2.0         36.0         22.0         80.0         C210           2.5         36.0         22.0         80.0         C211           2.8         36.0         22.0         80.0         C212


### ALTERNATIVE BEARINGS for other groove depths


O D	D	<b>D</b> i . i	
Groove Depth mm	Bearing Dia. mm	Product Ref.	Price
4.0	28.0	B28C	£16.03
5.3	25.4	B254C	£14.96
6.0	24.0	B24C	£10.48
6.5	23.0	B23C	£10.48
8.5	19.0	B19C	£7.82

## **BEARING GUIDED PILE CARRIER CUTTER**

Create a groove for pile carriers using a smaller router where application allows. Two fluted for fine finish with three types to suit centre leg, offset or plain pile carrier. Ideal for grooving for parting bead.









C225C



224	8mm		
2mm T	3mm	7mm	Offset leg
	-		



CONTROL OF WEGGS MAN



## HAND MITRE **SHEARS**

For perfect snipping and mitre cuts of weatherseal, mouldings and beading. See page 198 for full details.

Product Ref.

HM/SHEAR HM/SHEAR/A

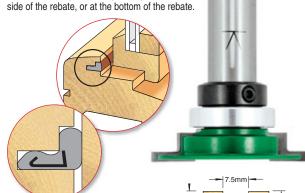


## WITH 1/4" SHANKS

mm	mm	mm	mm					1/4"
5.0	2.0	31.9	21.9	8.0	15.9	57	C224	£49.07
2.5	2.0	31.9	21.9	8.0	15.9	57	C225	£43.55
7.0	-	18.7	-	3.0	12.7	58	C225C	£35.66

# **RECESSER**Shank Mounted Bearing Guided Aquamac 63 and Aquatex P6 Style.

Ref. C206 is designed to accommodate the popular Schlegel® Aquamac 63 & Exitex® Aquatex P6 weatherseals and allows for a particularly small gap between sash and frame. The slot can be positioned part way down the



WATCH trend-uk.com/video		/video		D2I	Ĺ   C2	2.7mm	
D mm	D2 mm	C	C2	B	OL mm	Product Ref	Shank Dia.

22.0

67.0

## RECESSER

28.3

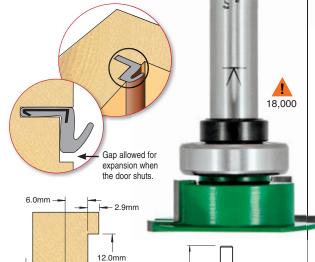
41.3

Shank Mounted Bearing Guided Aquamac 21 & Aquatex A10 Style.

4.8

2.7

Ref. C207 recessing cutter will accommodate Schlegel® Aquamac 21 & Exitex® Aquatex A10 seals. This cutter is designed for use in a wiping mode and comes complete with a guide bearing to reduce setting-up time and simplify machining operations.




0.011111					F D			
D mm	D2 mm	C mm	C2 mm	B mm	OL mm	Product Ref.	Shank Dia. 1/2"	
46.3	34.3	9.3	2.7	28.6	90.0	C207	£62.59	





INTUMESCENT RECESSING



- Neatly cuts grooves on doors or frames to accept Intumescent Strip which enables the formation of effective barriers to both fire and smoke.
- By using alternative ball bearing diameters, other seal thicknesses can be introduced.
- Alternative bearings can be purchased to suit other thicknesses.

## RECESSER

9.6mm


£62.59

C206

Shank Mounted Bearing Guided 1/4" Shank.

For 4.0mm thick intumescent strip. Ref. C209 is for 10.0mm width. Ref. C220 is for 15.0mm width.





Strip

Strip

width

VIDEO

Intumescent

Strip

C mm	D mm	B mm	E mm	Product Ref.	Shank Dia. 1/4"
10.0	24.0	16.0	4.0	C209	£32.68
15.0	24.0	16.0	4.0	C220	£34.28

## ALTERNATIVE BEARINGS for other strip thicknesses

Strip Thickness mm	Bearing mmØ	Product Ref.	Price
2.0	20.0	B20	£11.06
3.0	18.0	B18	£12.17

## RECESSER

Shank Mounted Bearing Guided 1/2" shank.

For 4.0mm thick intumescent strip.

Ref. C208 is for 10.0mm width

Ref. C221 is for 15.0mm width

Ref. C223 is for 20.0mm width.

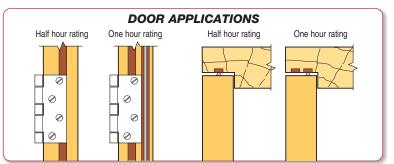


C mm	D mm	B mm	E mm	Product Ref.	Shank Dia. 1/2"
10.0	40.0	32.0	4.0	C208	£47.27
15.0	40.0	32.0	4.0	C221	£48.71
20.0	40.0	32.0	4.0	C223	£72.78

## ALTERNATIVE BEARINGS for other strip thicknesses \*

Strip Thickness mm	Bearing mmØ	Product Ref.	Price
2.0	36.0	B36	£11.06
3.0	34.0	B34	£11.06
5.0	30.0	B30	£11.92
6.0	28.0	B28	£11.92
7.0	26.0	B26	£9.14

<sup>\*</sup>A spacer set **SPACER/12** may be required for some bearings.






8 0mm

**(III)** 

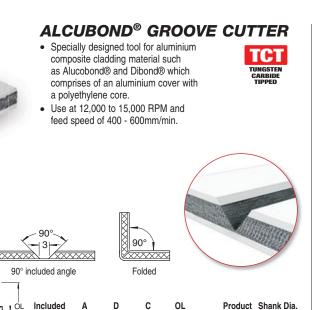12,000 - 15,000

## **NEW PLASTICS & COMPOSITES**



mm

57.0

Ref.

C300

TCT

1/4'

£34.54

## ABS/PVC STRAIGHT

 Used to slot and trim low melting point plastics such as ABS, Styrene and PVC.



 Single flute for fast cutting.



Shank Dia.

1/4

£17.26

Max. 25.0mm

1/2"

£72.24

C2 Product Shank Dia.



	SING	LE FL	UTE	
Ī	D mm	C mm	OL mm	Produ Ref.
; !	6.3	25.0	65.0	N C30



Angle

С 4 D I Deg.

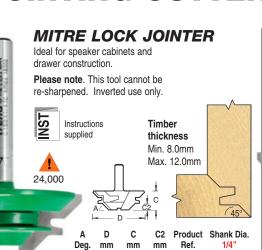
45°

mm

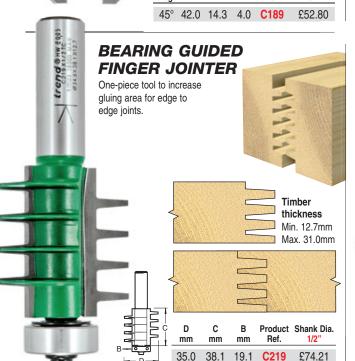
13.0

mm

10.0









D

Deg. mm С

 $\,\mathrm{mm}$ mm


# ROUTER CUTTER SETS

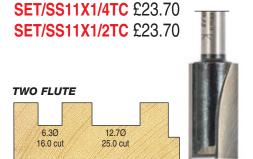
TUNGSTEN CARBIDE TIPPED


## 1/4" & 1/2" SHANK 6 PIECE SET

For decorative woodworking such as grooving, profiling & moulding.


Includes 3 self-guided cutters for straight and shaped work.



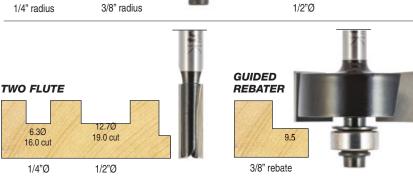













# 1/4" SHANK 12 PIECE SET

TCT
TUNGSTEN
CARBIDE
TUPPED

Contains a range of the most widely used cutters for decorative woodworking.

- For softwood, hardwood, chipboard, plywood and MDF.
- Includes seven self-guided cutters for decorating edge moulding of straight and curved components.

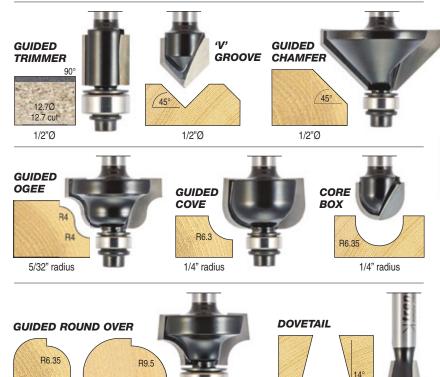**SET/SS8X1/4TC** £37.57






3/8" radius

1/4" radius

12.7Ø

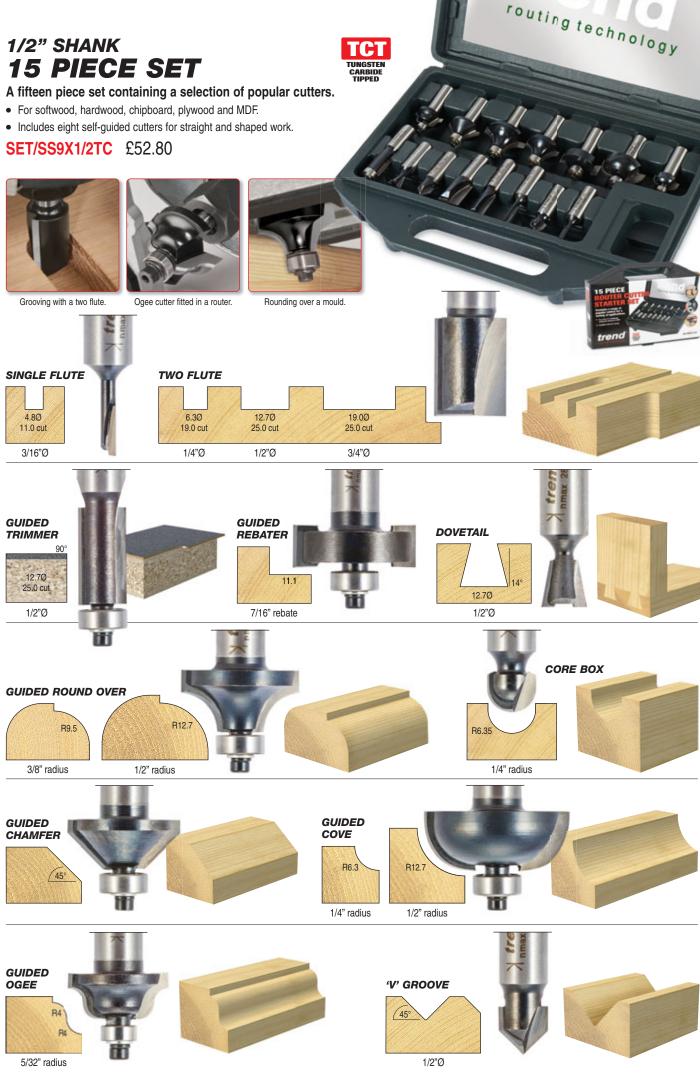1/2"Ø



100

# 1/4" SHANK **24 PIECE SET**

Contains a range of widely used cutters for decorative woodworking.

- For softwood, hardwood, chipboard, plywood and MDF.
- Excellent value for money.
- Includes eleven self-guided cutters for straight and shaped work

**SET/SS24X1/4TC** £74.21



## TWO FLUTE


6.3Ø 19.0 cut	9.5Ø 25.0 cut	12.7Ø 25.0 cut	19.0Ø 19.0 cut			
1/4ӯ	3/8ӯ	1/2ӯ	3/4ӯ	and the same of	THE REAL PROPERTY OF THE PARTY	













































1/8" radius





















## 1/4" SHANK **30 PIECE SET**


This set contains a selection of the most widely used cutters for decorative and professional woodworking. Supplied in an aluminium case.

- · Suitable for grooving, profiling and moulding.
- Includes seven straights from 5mm to 20mm diameter and fifteen bearing guided cutters for straight and shaped work.
- Use on softwoods, hardwoods, MDF and plywood.
- Excellent value for money.

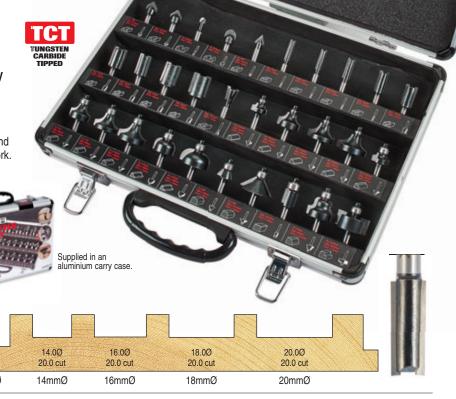**SET/SS31X1/4TC** £84.82



## **TWO FLUTE**








12.7mmØ



**GUIDED** REBATER 3/8" rebate



**GUIDED CHAMFER** 65 25°



**GUIDED COVE** 



1/4" radius

R9.5 3/8" radius


**GUIDED ROUND OVER** 



1/8" radius



1/4" radius



5/16" radius



'V' GROOVE





1/2"Ø



**CORE BOX** 

1/8" radius

R6.35 1/4" radius

**CLASSIC PANEL** 12.7Ø 1/2" Ø






1/8" radius



1/4" radius



5/16" radius




3/8" radius



ROMAN OGEE

5/32" radius





1/2" Ø



# 1/4" SHANK **50 PIECE SET**





This 50 piece cutter set contains a range of popular Tungsten Carbide Tipped cutters for a variety of applications.

- Use on softwoods, hardwoods, Chipboard, Plywood and MDF.
- Includes 22 guided, 10 straight and 18 unguided router cutters.
- Create 150 different profiles for a variety of applications.
- Excellent value for money.
- Supplied in aluminium carry case for safe and easy storage.



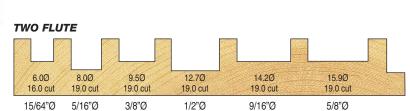


Grooving with a two flute.

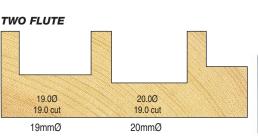
Ogee cutter fitted in a router.

## SET/SS50X1/4TC £133.85













**GUIDED TRIMMER** 

9.5Ø 25.4 cut 3/8"Ø

90' 12.7Ø 12.7 cut 1/2"Ø


12.7Ø 25.4 cut 1/2"Ø



























1/8" radius




























trend<sup>®</sup>

Profile dimensions in mm

# SPARE PARTS FOR ROUTER CUTTERS

Cutter reference	Replacement bearings	Bearing fixing pack screws	Collar packs & circlips	Blade fixing screws
	00	00	0	
7/90 & 7/91	B16		40	
7/96 - 7/99	BNT/2	SP-E		
8/20 & 8/21	B127A	SP-C		_
8/30 & 9/70	B16F	SP-D	-	
8/40 - 44	B127A	SP-C		-
8/51 & 8/53	B127A	SP-C	COLL/14	-
9/41 & 9/42	B95A	SP-J	-	-
9/55 - 9/57	B127A	SP-C		-
9/70	B16F	SP-D	-	-
9/71	B127A	SP-C	-	-
9/72-9/76	B16F	SP-D	-	-
9/77	B19	SP-A	-	-
9/78	B17	SP-A	-	-
9/80	B16	SP-A	-	-
9/85	B16F	SP-A	-	-
9/87 & 9/88 9/95 - 9/98	B16F	SP-D	-	-
9/95 - 9/98	B16 & B16	SP-E	COLL/14	-
11/20	B127	-	COLL/14	-
11/41	B19C	-	COLL/12	-
11/60	BNT/2	SP-E	-	-
11/40 & 13/40	B127	-	COLL/14	-
13/41	B16	-	COLL/14	-
13/42	B19	-	COLL/14	-
13/50	B19C	-	COLL/12	-
17/01	B127	-	COLL/14	-
17/1	B19	-	COLL/14	-
17/2	BB22	-	COLL/14	-
17/4	B29C	-	COLL/14	-
18/53 & 18/55	BB22	-	CIRC/1	-
18/54 & 18/56 18/80 - 18/84	B35G B127A	SP-C	CIRC/2	-
21/1 (1/4)	B19	SP-U	COLL/14	-
21/1 (1/2)	B19C	-	COLL/14 COLL/12	-
21/2	B254G	-	COLL/12	-
21/3	B38G		COLL/12A	-
22/4	B127A	SP-C	- OOLL/12A	
23/09 & 23/12	B127	- 01-0	COLL/14	-
23/10 (1/4)	B19	-	COLL/14	-
23/10 (1/2)	B19C	-	COLL/12	
23/11	B29C	-	COLL/12	-
25/3 & 25/5	B95A,B127A,B16A,B16D	SP-C	CIRC/3	-
25/7	B127A,B16A,B19A,B19C	SP-C	CIRC/2 COLL/14	-
26/2	B127	-	COLL/14	-
26/3	B19	-	COLL/14	-
26/4	B16	-	COLL/14	-
27/35 & 27/59	BB28	-	-	-
30/2 - 30/6	B127	-	COLL/14	-
33/55 - 33/56	BB16	-	COLL/8 COLL/12	-
34/60 & 34/61	B19C	-	COLL/12	-
34/90 - 34/92	B127,B16,B19	SP-E	-	-
40/13 - 40/16	B95A, B127A, B16A	SP-J	-	-
40/32	B127A	SP-S	-	-
41/5	B127A	SP-C	-	-
45/1 - 45/3	B63B	SP-G	-	-

OD

3/16"

14.0mm

14.0mm 5/8"

5/8

ID

3/32° 1/8°

3/16

3/16"

3/16

Ref.

B48J B63B

Price

£6.48 £6.48

£6.62 £6.48

£8.35

£5.18 £7.81 £11.92

£6.62

Thickness

3/32" 7/64"

11/64

3/16"

5.0mm

3/16

3/16"

## REPLACEMENT **BEARINGS**

To order the correct replacement bearing, please use the chart above.

## Care and maintenance

Check bearings regularly for free running and replace if faulty.

Bearings are shielded to prevent penetration of dust and grease packed for life. They should not be cleaned with s as this will cause pren Scrape off

Ref. B182 re-ground.

Always che fixing screv

### Bearing size conversion

inch		mm					
1/8	=	3.2					
3/16	=	4.76					
1/4	=	6.35					
3/8	=	9.55					
1/2	=	12.7					
1	=	25.4					
1-1/8	=	28.6					
1-3/8	=	34.9					



ith solvent or lubricated	5/8"	3/8"	5/32"	B16D	£11.92
dissolve the grease and	16.0mm	5.0mm	4.9mm	B16F	£11.92
mature bearing failure.	16.0mm	8.0mm	5.0mm	BB16	£11.06
any resin build-up.	17.0mm	1/4"	7/32"	B17	£11.92
	18.0mm	1/4"	3/16"	B18	£12.17
is sleeved and can be	18.2mm	1/4"	3/16"	B182	£9.80
	19.0mm	6.0mm	6.0mm	B19H	£9.14
eck the tightness of the	3/4"	1/8"	3/16"	B19B	£10.48
w before using cutter.	3/4"	3/16"	3/16"	B19A	£8.35
w before using cutter.	3/4"	1/4"	9/32"	B19	£5.18
	3/4"	1/2"	5/32"	B19C	£7.82
ize	20.0mm	1/4"	5.9mm	B20	£11.06
n	22.0mm	1/4"	6.0mm	B22	£11.06
''I	26.0mm	10.0mm	8.0mm	B26E	£16.67
mm	28.0mm	12.0mm	8.0mm	B28	£11.92
= 3.2	30.0mm	3/16"	5.0mm	B300A	£11.92
= 4.76	30.0mm	1/4"	9/32"	B300	£11.06
= 6.35	22.0mm	8.0mm	7.0mm	BB22	£11.11
= 9.55	22.0mm	1/2"	6.0mm	B22C	£16.03
= 12.7	7/8"	3/8"	9/32"	B78D	£10.48
= 25.4	23.0mm	1/2"	5.0mm	B23C	£10.48
= 28.6	24.0mm	1/2"	5.0mm	B24C	£10.48
34.9	25.0mm	15.0mm	6.0mm	B25G	£14.96
= 34.9	25.40mm	9.1mm	6.35mm	B254	£11.06
	25.4mm	15.0mm	5.5mm	B254G	£14.96
— OD —	1"	1/2"	4.0mm	B254C	£14.96
<del></del>	28.0mm	8.0mm	8.9mm	BB28	£14.96
thickness	28.0mm	1/2"	5.0mm	B28C	£16.03
- P - T	1-1/8"	1/2"	5/16"	B29C	£11.06
-1-1	32.0mm	12.0mm	10.0mm	B32	£11.06
	35.0mm	15.0mm	11.0mm	B35G	£14.96
-	1-3/8"	1/2"	7/16"	B35C	£14.96
70 TO C18	38.1mm	15.0mm	8.5mm	B38G	£13.23
rend"	41.0mm	8.0mm	10.6mm	BB41	£14.96
technology	43.0mm	8.0mm	9.6mm	BB43	£14.96
technology					

reference	bearing	fixing packs	& circlips	fixing screw
46/01	B127A	SP-S	-	SP-46/01D
46/010	B127A	SP-W	-	RT/M3.0
46/02 & 46/03	B19H	SP-Y	-	SP-46/02D
46/05 & 46/07	B63B	SP-G	-	-
46/06 46/09 & 46/090	B18 B19C	SP-A	COLL/12	-
46/2	B19	SP-F	COLL/12	-
46/23	B127A	SP-E SP-C		-
46/3 - 46/6C	B16	SP-A	-	-
46/6D - 46/6F	B127A	SP-C		-
46/7 46/7/50	B18 B127A	SP-A	-	-
46/7/60	B16F	SP-D	-	-
46/8/50	B95A	SP-C	-	-
46/9/50 & 46/9/60	B127A	SP-C	-	-
46/10 46/11 - 46/18	B26E	SP-C	COLL/38	-
46/11 - 46/18	B95A & B127A B19A	SP-C SP-C	-	-
46/20	B19	SP-E	-	-
46/21 & 46/22	B182	SP-A	-	-
46/23	B127A	SP-C	-	-
46/29 - 46/33	B95A & B127A	SP-C	-	-
46/34 46/35	B127A & B19A B127A & B19A	SP-C SP-C	-	-
46/37	B95B	SP-F	-	-
46/38	B127A	SP-C		-
46/39 & 46/39L	B95A, B127A,B16A & B19A	SP-C	-	-
46/40	B127 & B16	SP-A	-	-
46/41 46/42	B95A B95A & B127A	SP-C SP-C	-	-
46/43	R127∆	SP-C	- :	-
46/44	B22. B19 & B16	SP-E		
46/45 - 46/49	B22, B19 & B16 B127A B127 & B16	SP-E SP-C	•	-
46/50	B127 & B16	SP-A	-	-
46/52 46/55	B12/A & B16A	SP-C SP-C	-	-
46/56	B127A B16F	SP-D	-	- :
46/57 & 46/58	B19	SP-E	-	-
46/60 - 46/66	B95A & B127A	SP-C	-	-
46/67 & 46/68	B127A & B95A	SP-C SP-C	-	-
46/70 & 46/71 46/75	B127A & B16A B95B & B127B	SP-C SP-F	-	-
46/80	B127A	SP-C	-	-
46/82	B127A & B127A	-		-
46/84 - 46/85	B127A	SP-C	-	-
46/90	B16	-	COLL/14	-
46/91 46/92	B127 B16	-	COLL/14	-
46/93	B95A & B127A	SP-C	COLL/14	-
46/94	B19C	-	COLL/12	-
46/95 & 46/96	B127	-	COLL/14	-
46/96A	B127	-	-	-
46/97 - 46/160 46/101	B95A & B127A B254G	SP-C	COLL/12	-
46/100	B25G	-	COLL/12	-
46/103 - 107	B127A	SP-C	-	-
46/125, 46/115, 46/116	B95A + B127A	SP-C	-	_
46/130 - 160	* *	SP-T		
46/200 & 201 46/210	B19A B127A	SP-1 SP-C	-	-
46/211	B182	SP-A	-	-
46/212	B19	SP-E	-	-
46/230 - 46/280	B95B & B127B	SP-F	-	-
46/282 & 46/283	B127A & B16A	SP-C SP-C	-	-
46/290 46/300 & 301	B95A & B127A B19 & B19C	SP-E	COLL/12	-
46/360	B127A	SP-C	-	-
46/361	BN/4	SP-J		-
46/380	B254	SP-E	•	-
46/390 46/401	B127 & B127 B95A	SP-Q SP-C	-	-
46/501	B19 & B19C	SP-C SP-E	COLL/12	-
46/521	B14F & BB16	SP-J	-	-
46/903A	B95	-		
46/900 - 46/904	B95	-	COLL/14A	-
46/913	B127	SP-A	COLL/14	-
84/19 & 84/21 84/24	B16 B127	SP-A SP-A -	-	-
84/84	B16	- OI -A -	-	-
90/1 - 90/4	B127A	SP-C		
90/10 & 90/11				
90/10 & 90/11	BN/1	SP-E	-	-

## MULTI-BEARING Description **PACKS**

Contain the same size bearing for production applications. Reduced price for each individual bearing.

Cutter

Replacement

Bearing

Collar packs



Decountries	05	10	i i oddot i ioi.	1 1100
10 off B48J	3/16"	3/32"	B48J/10	£51.63
10 off B63B	1/4"	1/8"	B63B/10	£39.70
10 off B95A	3/8"	3/16"	B95A/10	£47.27
10 off B127A	1/2"	3/16"	B127A/10	£39.70
10 off B19H	19.0mm	6.0mm	B19H/10	£55.58
10 off B16	5/8"	1/4"	B16/10	£29.90
10 off B19C	3/4"	1/2"	B19C/10	£59.81

## RUBBER SHIELDED BALL **BEARINGS**

Give an improved protection from dust and



	OD	עו	Inickness	Product Het.	Price
	1/2"	3/16"	3/16"	B127ARS	£11.92
	5/8"	1/4"	3/16"	B16RS	£6.62
	3/4"	1/4"	9/32"	B19RS	£6.51
	22.0mm	8.0mm	7.0mm	BB22RS	£9.14
	35.0mm	15.0mm	11.0mm	B35GRS	£16.67
,					

## **PLASTIC SLEEVED BEARINGS**

Plastic sleeved for solid surface cutters. Refs. BNT/2 & BNT/5 are tapered.



OD	ID	Thickness	Ref.	Price
1/2"	3/16"	4.9mm	BN/4	£9.14
3/4"	1/4"	5.8mm	BN/1	£9.14
28.6mm	15.0mm	9.0mm	BN/3	£19.46
20/21.8mm	1/4"	5.7mm	BNT/2	£9.14
21/22.4mm	1/4"	6.8mm	BNT/5	£9.14

Product

	-
	97
	_
_	

Cutter reference	Replacement bearing	Bearing fixing packs	Collar packs & circlips	Blade fixing screw
90/12	B16F	SP-D	-	-
90/13 & 90/14	B16	SP-A	-	-
90/20 & 90/21	BN/3 B29C	-	COLL/12	-
90/23 & 90/24 90/25 & 90/26, 90/28	BN/4	SP-C	-	-
90/29	BNT/5	SP-E		-
90/30	B19	SP-E	-	-
90/31	B29C	-	COLL/12	-
90/40	B16F	SP-D	-	-
90/44	B16A	SP-D	-	-
91/20 92/1 - 92/6	BB41 & BB43 B127A	SP-C	-	-
92/20 - 92/27	B16F	SP-D	-	-
93/3	B16F	SP-D	-	-
93/1	B16F	SP-C	-	-
93/2 & 93/10	B127A	-	-	-
93/11	B16A	SP-D	-	-
331	B22C B28C	-	COLL/12 COLL/12	-
334	B29C & B35C	-	COLL/12	-
343 & 344	B29C & B33C	-	COLL/12	-
346 & 348	B32	-	-	-
753	BB16		-	-
865	B127A	SP-C	-	-
C040 C040A	B127A	SP-I SP-C	-	-
C040A C043B	B127A B127	SP-C	COLL/14	-
C044B	B127	-	COLL/14	-
C049	B95A	SP-I	-	-
C059	B95B	SP-F	-	-
C060	B95B	SP-H	-	-
C061	B95B	SP-F	-	-
C062 - C063A C063B, C063C, C065 & C066	B95A B127A	SP-H SP-C	-	•
C074 - C079E	B95A & B127A	SP-I	-	-
C086	B95A	SP-H	-	-
C087	B95B	SP-H	-	-
C090	B95B	SP-F SP-C		-
C091	B95A	SP-C	-	-
C094 C095	B95A & B127A B95A & B127A	SP-I SP-C	-	-
C095	B95A & B127A	SP-U	-	-
C097	B95A & B127A	SP-I	-	-
C098 - C099	B95A & B127A	SP-I	-	-
C104	B95A & B127A	SP-I	-	-
C105	B95A & B127A	SP-C	-	-
C111	BB22 B95A	SP-I	CIRC/1	-
C112, C115 & C115A C116 - C116A	B127A	SP-I	-	-
C117	B16	SP-D	-	-
C117A & C117B	B19	SP-I	-	-
C117C	B182	SP-I	-	-
C119	B127A	SP-C	-	-
C119A	B127A	SP-I	-	-
C119B C121, C121B & C121D	B127A B127	SP-C	COLL/14	-
C121A C121B & C121B	BB16	-	COLL/14	-
C121C & C121E	B16	-	COLL/14	-
C121G & C121H & C121P	B95	-	COLL/14A	-
C121K & C121N	B127	-	COLL/14	-
C122	B127A	SP-I	-	-
C123 C130	B19 B16	SP-I	COLL/14	-
C130	BB22	- 0	CIRC/1	-
C133	B19	SP-C	-	-
C134, C138A, B & C	B127A	SP-C	-	
C138 - C139	B95A	SP-C	-	-
C140	B127A	SP-I	-	-
C143 - C148	B127A BB22	SP-I	-	-
C149 C156 - C158	BB22	-	-	-
C152	B127A, B16A & B19A	SP-J	-	
C155	BB22	-	-	-
C162 - C162A	B127	-	COLL/14	-

### **BEARING FIXING PACKS**

Spare part packs make ordering spares easier. Packs include hex key, screw, washer & shield (if required). See chart above

for selection of correct pack & replacement bearing.				• (		
Key Type	Size A/F	Cap Head Screw	Washer ID	Shield OD x ID	Product Ref.	Price per Pack
Hex	3mm	M4 x 6mm	4.0mm	-	SP-A	£2.12
Hex	3mm	M4 x 6mm	4.0mm	5/8" x 1/4"	SP-B	£2.12
Hex	3/32"	NC5 x 3/8"	3.5mm	{ 1/2" x 3/16" } 5/16" x 3/16" }	SP-C	£2.80
Hex	3/32"	NC5 x 3/8"	3.5mm	16mm x 5mm	SP-D	£2.12
Hex	4mm	NF10 x 1/2"	5.0mm	15mm x 6.3mm	SP-E	£2.12
Hex	5/64"	NC3 x 3/8"	2.0mm	3/8" x 1/8"	SP-F	£3.22
-	-	NC2 x 7/32" (Pozi®)	2.0mm	-	SP-G	£1.45
Hex	{ 2.5mm 3/32"	{ 1/8"w x 3/8" } M3 x 8mm }	3.5mm	-	SP-H	£2.12
Hex	{ 2.5mm 3/32"	{ M3 x 8mm NC5 x 3/8" }	3.5mm }	1/2" x 3/16"	SP-I	£2.80
Hex	2.5mm	M3 x 8mm	5.0mm	1/2" x 3/16"	SP-J	£2.12
Hex	3/32"	NC5 x 1/2"	3.5mm	-	SP-Q	£2.80
Hex	5/64"	M2.5 x 6mm	2.5mm	3.2mm x 6mm	SP-R	£2.80
Hex	2.5mm	M3 x 6mm	3.5mm	-	SP-S	£1.84
Hex	5/64"	M3 x 12mm (csk)	-	-	SP-T	£1.84
-	-	M3 x 8mm (pan)	-	5/16" x 3/16"	SP-W	£10.48
-		Hex nut	-	4.2mm - 2.15mm	SP-X	£5.96
Hex	2.5mm	M4 x 5.5mm (Dome)	-	15mm x 5mm	SP-Y	£5.41

### **KEYS**

Gives positive and quick action to help prevent overtightening and to allow quick tightening of screw.



Key Type	Key Size	Product Ref.	Price
Hex	1.5mm	RT/KEY/1.5	£7.02
Hex	1/16"	AK/116	£1.06
Hex	5/64"	AK/564	£2.33
Hex	3/32"	AK/332	£1.00
Hex	2.5mm	AK/25	£1.00
Hex	3.0mm	AK/3	£1.00
Hex	1/8"	AK/18	£1.00
Hex	4.0mm	AK/4	£1.00
Torx®	T9	RT/KEY/T9	£5.55
Torx®	T15	RT/KEY	£5.55

Cutter reference	Replacement bearing	Bearing fixing packs	Collar packs & circlips	Blade fixing screw
			a circlips	lixilig screw
C165A	B182	SP-I	-	-
C165B	B19C	-	COLL/12	-
C165 - C166	B19C	-	COLL/12	-
C167 - C168	B63B	SP-R	-	-
C170 C170A	B127A BB16	SP-I	-	-
		SP-I	-	-
C183 - C184	B127A	SP-I	-	-
C183B & C184A C190 - C191	BB16 & BB318 B127A	SP-I	-	-
C193	B95A & B127A	SP-I	-	-
C193A	B22, B19R, B16	SP-E	-	-
C195 - C197	B127A	SP-I	-	-
C198	B95A & B127A	SP-I		-
C100	B19 & B19C	SP-I	COLL/12	-
C199 C201 & C203	B35G	-	CIRC/2	-
C204	BB22		-	-
C205	B127A	SP-I		
C206	B22C	-	COLL/12	-
C207	B29C		COLL/12	-
C208 & C221	B32	-		-
C209 & C220	B16	-	-	-
C210 - C213	B22C	-	COLL/12 COLL/14 COLL/8	-
C210A - C213A	BB20	-	COLL/14	-
C214	BB16	-	COLL/8	-
C214A	BB19C	-	COLL/12	-
C215	B127A	SP-I	-	-
C216	B16F	SP-I	-	-
C217 & C217A	B127A	SP-I	-	-
C218	B16F	SP-I	-	-
C223	B32	-	-	-
C224	B16	-	COLL/14	-
C225	B16	SP-C	-	-
C225C	B127	SP-C	-	-
C226	B19	SP-I	-	-
C255 & C256	BB34 & BB22	-	-	-
C260	B16	SP-I	-	-
C265 C266	B127A	SP-I SP-I	-	-
C266	B95A	SP-I	-	-
C272 & C273	B127A	-	COLL/14	-
MB/01 - MB/08	B48J	SP-X	-	-
MB/09 & MB/10	B48J	-	-	-
MB/11 & MB/12	B63B	•	-	-
PSC	BB22	-	-	-
QUAD	BB22	-	-	- DT/M0.0
RT/03 RT/04 - RT/08, RT/10,	-	-	•	RT/M3.0
H1/04 - H1/06, H1/10,				
11(M),12(M), RT/13 - RT/15 - RT/19, RT/21				DT/O F
RT/23 - RT/24	•	-	•	RT/3.5
RT/33, RT/39	B127			SP-46/02D
RT/30 - RT/32	B16		-	SP-46/02D
RT/40 & RT/41	-	-	-	RT/3.5 &
/40 @ 11//41				SP-46/02D
RT/50, RT/51 & RT/60	-		-	SP-46/02D
RT/65	B127A	SP-W		RT/M3.0
RT/70	B19C	-	COLL/12	RT/3.5
RT/72	B19C	-	COLL/12	SP-46/02D
RT/75	B19C & B19	RT/M4.0 🔺	COLL/12	SP-46/02D
RT/80	-	-	-	RT/3.5
RT/81	-	-	-	RT/M3.0
RT/100	B127	-	-	RT/M3.0
RT/130, 260	B127A	-	-	RT/M3.0
RT/323	-	-	-	RT/3.0
RT/331	B127A	SP-W	-	RT/M3.0
RT/343	B35C		COLL/12	RT/3.5
RT/391	B95A	SP-W	-	RT/M3.0
S46/02	B63B	SP-G	-	-
S49/10	B127 & B127	-	COLL/14	-
S64/2	B63B	SP-G	-	-
S64/30	B63B	SP-G	-	-
SSP/1-2B, 4 - 9B	B95A & B127	SP-C	COLL/14	-
SSP/3-3B	B95B & B127	SP-F	COLL/14	-
T46/0 & T46/02	B95A	SP-C	-	-
T46/01	B127A	SP-C	-	-
T46/04	B127A	SP-C	-	-
T46/1	B16	SP-E	-	-

### **COLLAR PACKS**

Collar Packs are used for cutters with shank mounted bearings. Packs include one collar, grub screw and hex key.

conar, grab coron and nox noy.				
Collar OD	Collar ID	Hex Key	Product Ref.	Price per Pack
11.0mm	1/4"	1/16"	COLL/14	£2.51
14.0mm	8.0mm	5/64"	COLL/8	£2.51
15.8mm	3/8"	1/16"	COLL/38	£2.51
15.0mm	3/8"	1/16"	COLL/38A	£2.51
18.0mm	1/2"	1/16"	COLL/12	£2.51

### ▲ = screw only, see below. • RT/3.5 for RB/D, SP-46/02D for RB/C

### **CIRCLIPS**

Sprung steel fasteners to hold bearings in position onto grooved shanks.

Collar	Product Ref.	Price per Pack
8.0mm	CIRC/1	£1.45
1/2"	CIRC/2	£1.45

Scrow

### **BLADE FIXING SCREWS FOR** ROTA-TIP

20.0mm

Always use our replacement screws if those supplied with the tool are lost or need replacing.



Type	Size & Type	Required	Product Ref.	Price
Slot	M3 x 4mm, dome 7mmØ	-	RT/M3.0	£3.17
Torx®	M3 x 4mm, dome 5.5mmØ	Torx <sup>®</sup> T9	RT/3.0	£3.17
Torx®	M3.5 x 5mm, 6mmØ	Torx <sup>®</sup> T15	RT/3.5	£3.17
Torx®	M4 x 5.5mm, dome 8mmØ	Torx <sup>®</sup> T15	SP-46/02D	£2.12
Hex	M3 x 5mm set	Hex 1.5mm	SP-46/01D	£1.45
Hex	M4 x 10mm, dome 7.3mmØ	Hex 2.5mm	RT/M4.0	£3.17

Κον

£2.51

BEARING FIXIN	G
SCREWS FOR ROTA-TIP	_
Spare fixing screws.	-

3	Туре	Dome Screw Size	Key Required	Product Ref.	Price
	Torx®	M4 x 5.5mm	T15	SP-46/02D	£2.12
	Hex	M4 x 5.5mm	2.5mm A/F	RT/4.0	£2.51



**PROFESSIONAL** 

### GSAW BLADES

High quality blades to cut straight and curved cuts in natural and man-made timber and plastic. Five blades available including cross ground, tapered or milled and set, depending on material and application.

- With universal T-shank bayonet fitting.
- Made from high alloyed Chrome-Vanadium Steel, perfect for use on softer materials.
- For general woodworking applications.

#### To fit machines:

AEG, BLACK & DECKER (NEW), BOSCH, DEWALT, FESTOOL, HITACHI, MACALLISTER, MAKITA, MCKELLER, METABO, POWERBASE, STANLEY FAT MAX

### JIGSAW BLADES 75 X 2.5MM UP-CUT 5PK

Ideal for straight, fine up-cuts in softwood, hardwood, laminated particle board, plywood and plastic. Up-cut, cross-ground, tapered back.

**JB/T101B** £10.30

(Price per pack of 5) JB/T101B/25 £41.15


(Price per pack of 25)

JB/T101B

Wood CV Made in Germany









#### Suitable for:





Laminated particle board



Plywood

Plastic

### JIGSAW BLADES 75 X 2.5MM DOWN-CUT 5PK

Ideal for straight, fine down-cuts in softwood, hardwood, laminated particle board, plywood and plastic. Down-cut, cross-ground, tapered back.

**JB/T101BR** £12.62

(Price per pack of 5)

JB/T101BR/25 £51.45 (Price per pack of 25)



**DOWN-CUT** 

trend

Wood CV Made in Germany

C	OL	P	Timber
Blade Length	Overall Length	Pitch	Thickness
75mm	100mm	2.5mm	4 - 30mm
(3")	(4")	10 tpi	(3/16" - 1-1/4")



### Suitable for:





Hardwood

Laminated particle board





### JIGSAW BLADES 75 X 4MM UP-CUT 5PK

Fast cutting, Ideal for straight, very fast clean cuts in softwood, hardwood, particle board and plywood. Up-cut, cross-ground and set.

JB/T144D £9.17

(Price per pack of 5)

JB/T144D





**Wood CV** 

C	OL	P	Timber
Blade Length	Overall Length	Pitch	Thickness
75mm	100mm	4.0mm	6 - 60mm
(3")	(4")	6 tpi	(1/4" - 2-3/8")



### Suitable for:







Particle board



### JIGSAW BLADES 75 X 3MM UP-CUT 5PK

Ideal for fast coarse cuts in softwood, hardwood, plywood and plastic. Up-cut, milled and alternate set.

JB/T111C £5.73

(Price per pack of 5)

JB/T111C



Timber Blade Length Overall Length Pitch Thickness 6 - 60mm 75mm 100mm 3.0mm (3")(1/4" - 2-3/8") 8 tpi



### Suitable for:







Plastic


### JIGSAW BLADES 55 X 2MM UP-CUT 5PK

Ideal for straight cuts in softwood, hardwood, plywood, insulation material, acrylic and plastic. Up-cut, milled, wavy set.

**JB/T119B** £6.87


(Price per pack of 5) JB/T119B

trend Wood CV Made in Germ





Suitable for:











mmmmm









**PROFESSIONAL** 

### SCILLATING TOOL BLADES

Fits onto the majority of popular oscillating multi-tools. Tools available for a variety of materials & cut quality including wood, plastic, metal, plasterboard & fibreglass.

- Universal design arbor.
- Available in High Carbon Steel, High Speed Steel or Bi-Metal depending on the application.
- For the highest quality and longest life, select Titanium Nitride coated blades. TiN coating gives professional performance and longer life by keeping the blade cooler.
- Black oxide finish provides corrosion resistance.



To fit machines\*:

BLACK & DECKER, BOSCH (NOT STARLOCK), DREMEL MULTI-MAX, FEIN MULTIMASTER, HITACHI, MAKITA, METABO, MILWAUKEE, PORTER CABLE, ROCKWELL SONICRAFTER, SKILL MULTI-TASKER, WORX SONICRAFTER.

\* Certain machines require an adaptor to be fitted.

Black oxide finish provi	des corrosion resistan	Ce.			Certain n	adaptor to be litted.			
Blade teeth (close up) shown 50% actual size	Cut Width mm	Cut Length mm	Teeth per inch	Application for blade	Grade	Plunge cut	Product Ref.	Price	
		9.5mm	28mm	16 tpi	Fine cut precision detail HCS for wood & PVC.	HCS	yes	OB/120/C	£9.08
	120	30mm	66mm	16 tpi	Fine cut deep plunge HCS for wood & PVC.	HCS	yes	OB/133/C	£13.17
- n	1138	30mm	41mm	18 tpi	Fast coarse cut HCS for wood, plasterboard and PVC.	HCS	yes	OB/200/C	£8.59
= \$1 = x = 01 = 2		30mm	41mm	14 tpi	Fine cut precision 'Japanese Tooth' HCS for hardwood and wood.	HCS	no	OB/220/C	£12.33
WOOD H St HCS H St HCS	1 13	64mm	41mm	18 tpi	Fast coarse cut HCS for wood, plasterboard and PVC.	HCS	no	OB/250/C	£10.89
HARDWOOD  S1 HCS	4 3	64mm	41mm	14 tpi	Fine cut precision 'Japanese Tooth' HCS for hardwood and wood.	HCS	no	OB/270/C	£17.59
-11	E S	30mm	41mm	18 tpi	Fine cut precision Bi-Metal plunge for wood, wood with nails, metal, PVC and plasterboard.	BIM	yes	OB/300/B	£8.59
# 51 	TET (18)	30mm	54mm	18 tpi	Long life Titanium coated BIM plunge cutting for wood, wood with nails, metal, PVC and plasterboard.	BIM - TiN	yes	OB/330/BT	£12.33
S DOM	188	30mm	41mm	18 tpi	Long life Titanium coated BIM plunge cutting for wood, wood with nails, metal, PVC and plasterboard.	BIM - TiN	yes	OB/336/BT	£14.82
S S S S S S S S S S S S S S S S S S S	11. 1138	64mm	41mm	18 tpi	Long life Titanium coated BIM for wood, wood with nails, metal, PVC and plasterboard.	BIM - TiN	no	OB/337/BT	£13.38
in es	123	44mm	41mm	18 tpi	Long life Titanium coated BIM plunge cutting for wood, wood with nails, metal, PVC and plasterboard.	BIM - TiN	yes	OB/340/BT	£20.64
риол 1100110/80	11 36	80mm	25mm	18 tpi	Long life Titanium coated segmented HSS for corner applications for sheet metal, softwood, hardwood and fibreglass.	HSS - TiN	no	OB/410/HT	£20.64
HCS	वह उत्	50mm	28mm	n/a	Rigid scraper for adhesive residues, caulk, paint, tile / carpet adhesive and insulation foam.	HCS	n/a	OB/500/C	£6.68
x1 x1	x1	30mm & 44mm	41mm & 54mm	18 tpi	3 piece set long life Titanium coated plunge cutting for wood, metal, PVC & plasterboard. 1 off each OB/330/BT, OB/336/BT & OB/340/BT	BIM - TiN	yes	OB/KIT/A	£38.24
x2 x2	x 2	30mm & 44mm	<b>PACK</b> 41mm & 54mm	18 tpi	6 piece set long life Titanium coated plunge cutting for wood, metal, PVC & plasterboard. 2 off each OB/330/BT, OB/336/BT & OB/340/BT	BIM - TiN	yes	OB/KIT/B	£65.00

SOLID CARBIDE

### LANER BLADES

Trend Solid Carbide Planer Blades fit most makes of portable electric planers and are supplied in pairs.

- Professional versions are made from high grade extended life carbide.
- They have two cutting edges and are reversible for extended life.
- A conversion kit is required for some planers.






### PROFESSIONAL PLANER **BLADE 82 X 5MM**

Blade Length	Blade Width	Blade Thickness
82.0mm	5.0mm	1.2mm


Model No. **BLACK & DECKER** P7102, P7103, PL805



PB/22 £12.54 (Price per pair)

### PROFESSIONAL PLANER **BLADE 80.5 X 5.9MM** Blade Length Blade Width Blade Thickness

80.5mm	5.9mm	1.2mm	
Make	Model No.		
AEG (ATLAS COPC	O) 450		
DEWALT	DW676K		
ELU	MFF40, MF	F80, MFF80K, MFF81, MFF81K	



PB/25 £12.54 (Price per pair)

### PROFESSIONAL PLANER **BLADE 75.5 X 5.5MM**

Blade Length Blade Width Blade Thickness

75.5mm	5.5mm	1.1mm
Make	Model N	lo.
AEG (ATLAS COPCO		
BLACK & DECKER	BD750,	DN750, SR600, SR600K
BOSCH	0590, 15	590, 1591, P400
HAFFNER	FH222	
HOLZ-HER	2121, 22	223 (OLD), 2320, 2330
KRESS	EH6701	, EH6702, JETSTAR
MAFELL	HU75	
METABO	6375	
SKII	98H	

CRAFTPRO PLANER **BLADE** 80.5 X 5.9MM

5.9mm

**CRAFTPRO PLANER** BLADE 82 X 5.5MM Blade Length Blade Width Blade Thickness

5.5mm

Blade Thickness

1.2mm

1.1mm

Blade Length Blade Width

80.5mm

82.0mm



PB/28 £12.54 (Price per pair)

CR/PB25 £10.56 (Price per pair). See PB/25 for list of planers.

### PROFESSIONAL PLANER **BLADE 82 X 5.5MM**

Blade Length	Blade Width	Blade Thickness
82.0mm	5.5mm	1.1mm



PB/29 £12.54 (Price per pair)

Make	Model No.
AEG (ATLAS COPCO)	EH3-82, EH82, EH82.1, EH450, EH700, EH800, EH822, H500, H750,
,	PL750
BLACK & DECKER	BD710, BD711, BD713, BD725, DN710, DN720, KW712, KW712KA,
	KW713, KW725, KW750K
BOSCH	1592-9, GHO14-4 V-LI, GHO15-82, GHO18 V-LI, GHO26-82, GHO40-82,
	GHO282, GHO36-82C, GH31-82, PHO2-82, PHO3-82/B, PHO15-82,
	PHO16-82, PHO25-82, PHO30-82, PHO100, PHO150, PHO200, PHO300
CASALS	CE82, CE98ACE
COTECH (CLAS OHLSON)	18-3086
DEWALT	DW677, DW678EK, DW678K, DW680, D26500, D26501
DRAPER	PT682, P882
FELISATTI	TP282
FERM	FP82
FREUD	FE82, FE82VCE
HAFFNER	FH224
HITACHI	F20*, FU20*, P18DSL/JJ, P18DSL/W4 (Cordless), P20SA, P20SA2,
	P20SF, P20V
HOLZ-HER	2223, 2321, 2321-S, 2322
MAFELL	EHU82, MHU82, MHU82D, MHU82S
MAKITA	1100*, 1125*, 1900*, 1900B* 1901*, 1902, 1923B*, 1923BD*, 1923H,
	DKP180Z, FB0800, KPO800, KPO810, M102*
METABO	4382, EXPERT, HO0882, HO8382
NUTOOL	NPT82
PERLES	SK82A, HOB882
PEUGEOT	ENERGY PLANE-910, RA3/82, RA82CS, RA400
RYOBI	EPN-7582, EPN7582NHG, GH014, HL-82, L180, L282, L1323A*, L-1835
SKIL	92H, 94H, 95H, 96H, 97H
STAYER	P910, PH82
WOLF/KANGO	8057*, 8108, 8614*

Requires conversion kit Ref. PB/CK/119.

### CR/PB29 £10.56 (Price per pair).See PB/29 for list of planers.

# trend



CR/PB29/5PR £41.15 (Pack includes 5 pairs).


See PB/29 for list of planers.



For Makita, Ryobi, Hitachi and Kango planers. Contains a pair of plates to allow the PB/29 & CR/PB29 blades to be fitted into the planer cutter block.

PB/CK/119 £13.91

(Price per pair)



### SAWBLADE RANGES



### PROFESSIONAL SAWBLADES

WOOD & WOOD BASED	112
UNIVERSAL RIP	112
ALUMINIUM/PLASTIC	112
PANEL TRIMMING	113
RADIAL ARM/CROSSCUT	113
PCD SAWBLADES	113
PCD FOR GEMSTONE	113
BUSHING WASHERS	113



### CRAFTPRO SAWBLADES

WOOD & WOOD BASED	115
NON STICK COATED	116
CORDLESS TRIM	116
PANEL TRIMMING	116
TRIPLE PACKS	116
MITRE SAW CROSSCUTTING	117
ALUMINIUM/PLASTIC	117
BUSHING WASHERS	117



### **COMPATIBILTY**

COMPATIBILITY CHART 118

PCD TIPPED SAWBLADES







### PROFESSIONAL SAWBLADES





Specially designed sawblades for demanding professional and industrial applications.

- Micro-granular Carbide Tips give long lasting performance in a wide range of materials and provide the maximum number of re-sharpenings.
- The blades are laser cut from hardened, chrome alloyed steel plate and the reamed bore ensures precise balance and fit to spindle. Body tempered and roller tensioned to maintain trueness.
- Bore sizes are offered in standard 16, 20 and 30mm sizes but can be reamed to suit specific sizes.

### **COLOUR CODE KEY**

### **UNIVERSAL RIP (RP)**

Coarse finish suitable for: ripping of softwood, hardwood, plywood and exotic timber.

### **GENERAL PURPOSE (GP)**

 Medium/coarse finish suitable for: ripping of softwood, hardwood, fibre board, plasterboard, cement bonded board and exotic timber.

#### **COMBINATION (CM)**

 Medium finish suitable for: softwood, hardwood, plywood, soft fibre board, exotic timber cement bonded board and plasterboard.

#### PANEL TRIMMING (PT)

Super fine finish suitable for: hardwood, particle boards with plastic laminates on one side and MDF.

#### TRIMMING / CROSSCUT (TR)

 Medium/fine finish suitable for: softwood, hardwood, plywood, double-sided veneer board, single-sided plastic laminate boards, MDF, particle board and hardboards.

### **FINE TRIM / FINISHING (FT)**

Extra fine finish suitable for: hardwood, softwood, exotic timber, double-sided veneer board, single-sided laminate materials. MDF, particle board and hardboards.

ALTERNATE TOP BEVEL

### **WOOD & WOOD BASED**

Blade

Quick

Selector Dia.

#### Less teeth (GP)

- Preferred for ripping along the grain of hard and softwood and wood based material.
- Coarser finish, faster feed rate.

### More teeth (CM, TR, FT)

- Preferred for cutting across grain of hard and softwood.
- Finer finish, slower feed rate.
- \*\* For plunge saw (+5° hook). GP blades have +15° hook.



Туре	No.	mm	Nom	Teeth	mm	mm	mm	Product Ref.	Price
	7	160	6-1/4	24	20	2.6	1.6	CM/160X24X20 +	£44.24
0	7	160	6-1/4	48	20	2.6	1.6	FT/160X48X20 +	£63.59
0	7.1	160	6-1/4	48	20	2.2	1.6	FT/160X48X20A **	£45.85
0	8B.1	165	6-1/2	48	20	2.2	1.6	FT/165X48X20 **	£51.58
	15	190	7-1/2	24	30	2.8	1.8	GP/190X24X30 +	£45.96
	15	190	7-1/2	36	30	2.8	1.8	CM/190X36X30 +	£54.96
	16	200	8	48	30	3.0	2.0	TR/200X48X30 +	£67.02
	21	230	9	40	30	3.0	2.0	CM/230X40X30 +	£68.19
	25	250	10	60	30	3.2	2.2	TR/250X60X30 +	£89.41
0	25	250	10	80	30	3.2	2.2	FT/250X80X30 +	£102.20
	29	300	12	48	30	3.2	2.2	CM/300X48X30 +	£80.86
	29	300	12	60	30	3.2	2.2	TR/300X60X30 +	£92.16
0	29	300	12	96	30	3.2	2.2	FT/300X96X30 +	£116.70
	32	350	14	42	30	3.5	2.5	GP/350X42X30 +	£87.46
	32	350	14	54	30	3.5	2.5	CM/350X54X30 +	£99.69
0	32	350	14	108	30	3.5	2.5	FT/350X108X30 +	£140.74


inch No. of Bore Kerf Plate

### **UNIVERSAL RIP**

#### Coarse finish

For ripping applications on saw benches for cutting along the grain. Chip limiter design for anti-kick back & cooling slots for continuous use.

### FLAT TOOTH FORM





Blade Type	Quick Selector No.	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
	25	250	10	24	30	3.2	2.2	RP/250X24X30 +	£62.94
	29	300	12	24	30	3.2	2.5	RP/300X24X30 +	£70.44
	31	315	12-1/2	24	30	3.2	2.2	RP/315X24X30 +	£75.18

# Use a wax lubricant.

### *ALUMINIUM/PLASTIC*

### Fine finish

For non-ferrous metals or plastics. These blades have a negative hook angle.



### TRIPLE CHIP TOOTH FORM

	Quick		Dia.						
Blade Type	Selector No.	Dia. mm	inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
	7	160	6-1/4	48	20	2.8	2.2	AP/160X48X20 +	£70.24
	15	190	7-1/2	60	30	2.8	2.2	AP/190X60X30 +	£94.12
	25	250	10	80	30	3.2	2.6	AP/250X80X30 +	£116.35
	29	300	12	96	30	3.2	2.6	AP/300X96X30 +	£134.26



### PANEL TRIMMING

### Super fine finish

For super fine trimming of panels. They have a triple chip tooth design with a positive hook for super fine finish.



### **TOOTH FORM**

	Quick		Dia.			<b>→</b> i			WA
Blade Type	Selector No.	Dia. mm	inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
•	7	160	6-1/4	48	20	2.6	1.6	PT/160X48X20 +	£71.52
	7.1	160	6-1/4	48	20	2.2	1.6	PT/160X48X20A** +	£57.31
	15	190	7-1/2	60	30	2.8	1.8	PT/190X60X30 +	£85.44
	20	220	8-5/8	64	30	3.0	2.0	PT/220X64X30* +	£95.50
	25	250	10	80	30	3.2	2.2	PT/250X80X30 +	£100.73
	29	300	12	96	30	3.2	2.2	PT/300X96X30 +	£118.86

\*\* For plunge saw (+4° hook) \*PT/220 for use on wall saws.

### RADIAL ARM CROSSCUT & SNIP-OFF

### Coarse, Medium or Fine finish

blades have a zero hook angle to minimise 'pick-up' and 'snatching'.



### For crosscutting applications. These **ALTERNATE TOP BEVEL TOOTH FORM**

	Quick		Dia.				5° hook		
Blade Type	Selector No.	Dia. mm	inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
0	C18A	215	8-1/2	48	30	2.8	1.8	CC/215X48X30 +	£73.26
00	C19.2	216	8-1/2	36	30	2.53	1.8	CC/216X36X30 +	£55.31
0	C19.2	216	8-1/2	60	30	2.53	1.8	CC/216X60X30 +	£68.47
0	C28.2	260	10-1/4	60	30	2.5	1.8	CC/260X60X30 +	£58.89
00	C28.2	260	10-1/4	80	30	2.5	1.8	CC/260X80X30 +	£80.79



### PCD FOR CEMENT FIBRE BOARD

TRIPLE CHIP

**TOOTH FORM** 

Polycrystalline Diamond Tipped sawblade for use on cement fibre board and tool-wearing material eg laminate, solid wood and ultra hard materials.

Quick Selector No.	Dia. mm	Dia inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
7.2	160	6-1/4	4	20	1.8	1.4	N PCD/FSB/1604	£41.15
8B.2	165	6-1/4	4	20	1.8	1.4	N PCD/FSB/1654	£41.15
15.2	190	6-1/4	6	30	2.4	1.6	N PCD/FSB/1906	£51.45
C19.2	216	6-1/4	6	30	2.4	1.6	N PCD/FSB/2166	£72.05
23.1	235	6-1/4	6	30	2.4	1.6	N PCD/FSB/2356	£77.20
25.1	250	6-1/4	6	30	2.4	1.6	N PCD/FSB/2506	£81.32
C30.1	305	6-1/4	8	30	2.4	1.8	N PCD/FSB/3058	£113.25







### PCD FOR GEMSTONE WORKTOPS

Polycrystalline Diamond Tipped for use in circular saws to rough cut Gemstone worktop. Eight high quality industrial PCD tips for roughing cut leaving 5mm overhang for router trimming. Blade can also be used on cement bonded board.



	1	→   <del>-</del>
-5'	10° P	late -

Quick		Dia					'	
Selector	Dia.	inch	No. of	Bore	Kerf	Plate		
No.	mm	Nom	Teeth	mm	mm	mm	Product Ref.	Price
7.1	160	6-1/4	8	20	2.4	1.6	PCD/SB/1608	£130.04



It is recommended that the blade should not project more than 1mm out of the bottom of

### PROFESSIONAL SAWBLADE BUSHING WASHERS (REDUCING RINGS)

- Accurately machined with reamed bores and splined outside edges for a precision fit into the blade bore of Trend sawblades only.
- Thickness 1.4mm. Take extra care when mounting sawblades onto a saw machine spindle.

All Bushing Washer Refs. BW.. Priced at £4.34 each.



Bushing washers supplied to reduce bore diameter for certain makes and models of saw. Bushing washers must be pressed or glued into blade body of Trend Professional 'Waveform' and Industrial sawblades only. Loose bushing washers/rings must not be used.

Outside Dia. mm (OD)	Inside Dia. mm (ID)	Produc Ref.
20	16	BW17
25	20	BW4
30	15	BW2
30	15.9 (5/8")	BW6
30	16	BW48
30	18	BW2

Outside Dia. mm (OD)	Inside Dia. mm (ID)	Product Ref.
30	20	BW15
30	25	BW12
30	25.4 (1")	BW14
31.8 (1-1/4")	30	BW20
32	30	BW29
32	25	BW30

**BUSHING WASHERS** 

### CRAFTPRO SAWBLADES











The CRAFTPRO range of sawblades are designed for a professional finish in wood, MDF, particle board, hardboard & plywood.

- Microgranular Tungsten Carbide Tipped to allow cutting of abrasive materials.
- Blade sizes from 125mm to 350mm catering for cordless trim saws to bench saws.

Reamed bore to ensure precise fit to spindle.

Wood cutting blades have front bevel tooth form for a superior quality of cut.

Silverbraze to ensure tip is bonded securely to body.

Microgranular Tungsten Carbide Tipped to allow cutting of abrasive materials.

Specific sawblades with anti-kickback tooth design.

Body hardened and tempered to maintain trueness.

Laser etched on reverse to European standard EN847-1. The Trend name for traceability and a guarantee of quality.

Blades 250mmØ and above are roller tensioned to prevent distortion when blade is under stress when rotating and cutting.

High grade alloy steel plate body precision ground to maintain flatness.



Colour label denotes blade group for easy selection of blade for correct finish on material and type of sawing machine used.

Sawblades up to 260mmØ are safely stored in clamshell packaging. Blades over 260mmØ are supplied in cartons.

### **COLOUR CODE KEY**

### **UNIVERSAL RIP (RP)**

Coarse finish suitable for: ripping of softwood, hardwood, plywood and exotic timber







Softwood rip

Hardwood & exotic rip

Plywood rip

### **GENERAL PURPOSE (GP)**

ren

Order Ref.

CSB/NC18430

sawing technology

TUNGSTEN CARBIDE TIPPED

16mm

000000

**QUALITY TCT SAWBLADE** 

Medium/coarse finish suitable for: ripping of softwood, hardwood, fibre board, plasterboard, cement bonded board and exotic timber

bonded board















& exotic

rip and

**COMBINATION (CM)** 

trend



bonded board

exotic timber, cement bonded board and plasterboard.





Medium finish suitable for: softwood, hardwood, plywood, soft fibre board,







### PANEL TRIMMING (PT)

Super fine finish suitable for: hardwood, particle boards with plastic laminates on one side and MDF








Chipboard laminated one-sided

Particle board MDF

### TRIMMING / CROSSCUT (TR)

 Medium/fine finish suitable for: softwood, hardwood, plywood, double-sided veneer board, single-sided plastic laminate boards, MDF, particle board and hardboards.



Plywood rip &

Chipboard laminated one-sided

MDF

184mm

= 9500

RPM

rip &

crosscut

Hardboard

### **FINE TRIM / FINISHING (FT)**

Extra fine finish suitable for: hardwood, softwood, exotic timber, double-sided veneer board, single-sided laminate materials, MDF, particle board and hardboards





Boards veneered both sides

rip & crosscut



one-sided





### **WOOD & WOOD BASED MATERIALS**

### Less teeth (RP, GP)


- · Preferred for ripping along the grain of hard and softwood and other wood based material.
- · Coarser finish.
- Faster feed rate.

### More teeth (CM, TR, FT)

- · Preferred for cutting across grain of hard and softwood.
- · Finer finish.
- Slower feed rate.

### Suitable for:

- Softwood
- MDF
- Hardwood
- Hardboard
- Particle board
- Plywood •



Quick

Dia.

Bushing





Teeth have top and front bevel which allows the blade to bite into the timber more easily.

### ASSOCIATED PRODUCTS



DI. I	Quick	В.	Dia.			Bushing		DI. I	_		
_	Selector No.	Dia. mm	inch Nom	No. of Teeth	Bore mm	Washer mm	Kert	Plate mm		oduct Ref.	Price
Туре											
	M3	85	3-3/8	20	10	-	1.6	1.1		3/8520	£12.88
	M3.1	85	3-3/8	24	15	-	1.2	0.7	N CSI	3/8524A	£13.34
	M6	115	4-1/2	24	9.5	-	1.5	1.0	N CSE	3/11524	£12.50
	2	130	5-1/8	24	20	16	2.4	1.5	CSI	3/13024	£25.79
	2A	134	5-1/4	24	20	_	1.7	1.0		3/13424	£25.79
	3	140	5-1/2	24	20	12.7 or 16	2.4	1.5		3/14024	£25.79
	5	150	6	24	20	16	2.4	1.5		3/15024	£23.69
	7.1	160	6-1/4	24	20	-	2.2	1.6		3/16024A	£27.26
	7	160	6-1/4	24	20	16	2.4	1.5	CSI	3/16024	£26.47
	7.1	160	6-1/4	28	20	-	2.2	1.6	CSI	3/16028A	£26.47
	7.1	160	6-1/4	36	20	-	2.2	1.6	CSI	3/16036	£28.36
	7	160	6-1/4	48	20	16	2.4	1.5		3/16048	£31.36
0	7.1	160	6-1/4	60	20	-	2.2	1.6		3/16060	£30.72
	7.1	160	6-1/4	48	20	-	2.2	1.6		3/16048A	£29.85
	7.1	160	6-1/4	80	20	-	2.2	1.6		3/16080	£44.95
	8D	162	6-3/8	48	20	-	1.8	1.2	CSI	3/16248	£26.47
	8C	165	6-1/2	18	30	16 or 20	2.4	1.5	CSI	3/16518	£26.47
	8C	165	6-1/2	24	30	16 or 20	2.4	1.5	CSI	3/16524	£27.13
	8B.1	165	6-1/2	48	20		2.2	1.6		3/16548B	£28.37
	8C	165	6-1/2	48	30	16 or 20	2.4	1.5		3/16548	£31.35
	8B.1	165	6-1/2	60	20	-	2.2	1.6		3/16560	£31.63
	9.1	170	6-11/16	24	16	-	2.4	1.5		3/17024	£26.44
	11	180	7	24	30	16 or 20	2.4	1.5	CSI	3/18024	£27.13
	11	180	7	30	30	16 or 20	2.4	1.5	CSI	3/18030	£29.24
	11	180	7	40	30	16 or 20	2.4	1.5	CSI	3/18040	£29.90
	12	184	7-1/4	24	16	-	2.6	1.7		3/18424	£27.79
_											
	12.2	184	7-1/4	24	30	-	2.6	1.7		3/18424A	£27.79
	12	184	7-1/4	30	16	-	2.6	1.7		3/18430	£29.24
	12.2	184	7-1/4	30	30	-	2.6	1.7	CSI	3/18430A	£29.24
	12	184	7-1/4	40	16	-	2.6	1.7	CSI	3/18440	£29.90
	12.2	184	7-1/4	40	30	-	2.6	1.7	CSI	3/18440A	£30.30
	12.1	184	7-1/4	40	20	_	2.6	1.7		3/18440B	£28.45
	12.2	184	7-1/4		30		2.6	1.7		3/18458	£34.14
				58		-					
	12A	185	7-1/4	48	20	-	2.2	1.63		3/18548	£27.62
	15	190	7-1/2	12	30	16 or 20	2.4	1.6	CSI	3/19012	£21.57
	15	190	7-1/2	24	30	16 or 20	2.6	1.7	CSI	3/19024	£27.79
	13	190	7-1/2	24	16	-	2.6	1.7	CSI	3/19024A	£27.79
	15	190	7-1/2	40	30	16 or 20	2.6	1.7	CSI	3/19040	£29.90
	13	190	7-1/2	40	16	-	2.6	1.7		3/19040A	£29.90
	15	190	7-1/2	60	30	16 or 20	2.8	1.9		3/19060	£31.78
	16	200	8	40	30	16 or 20	2.6	1.7		3/20040	£32.68
	18	210	8-1/4	24	30	25	2.4	1.6	CSI	3/21024	£32.68
	18	210	8-1/4	36	30	-	2.4	1.45	N CSI	3/21036	£32.96
	18	210	8-1/4	48	30	25	2.4	1.6	CSI	3/21048	£36.14
0	18	210	8-1/4	72	30	-	2.4	1.45		3/21072	£46.35
	18A	215	8-1/2	24	30	-	2.6	1.7			
										3/21524	£33.34
	18A	215	8-1/2	48	30	-	2.6	1.7		3/21548	£39.70
	18A	215	8-1/2	60	30	-	2.6	1.7		3/21560	£41.69
	21	230	9	24	30	-	2.6	1.7	CSI	3/23024	£36.14
	21	230	9	40	30	-	2.6	1.7	CSI	3/23040	£38.24
	23	235	9-1/4	24	30	16 or 25	2.6	1.7		3/23524	£36.14
	23	235	9-1/4	40	30	16 or 25	2.6	1.7		3/23540	£38.24
	25	250	10 nom.	24		16, 20 or 25.4	3.0	2.0		3/25024	£37.57
	25	250	10 nom.	30		16, 20 or 25.4	3.0	2.0		3/25030	£42.49
	25	250	10 nom.	48		16, 20 or 25.4		2.0		3/25048	£45.25
	25	250	10 nom.	60	30	16, 20 or 25.4	3.0	2.0	CSI	3/25060	£48.04
0	25	250	10 nom.	80	30	16, 20 or 25.4	3.0	2.0	CSI	3/25080	£53.60
	29	300	11-7/8	24	30	-	2.8	1.8		3/30024*	£45.92
	29	300	11-7/8	32	30	-	3.2	2.2		3/30032	£50.82
	29	300	11-7/8	48	30	-	2.8	1.8		3/30048	£52.80
	29	300	11-7/8	72	30	-	2.8	1.8		3/30072	£66.69
	31	315	12-3/8	24	30	-	3.2	2.2	CSI	3/31524	£49.91
	31	315	12-3/8	48	30	-	3.2	2.2	CSI	3/31548	£56.37
	31	315	12-3/8	72	30	-	3.2	2.2		3/31572	£93.82
	32	350	13-3/4	64	30	-	2.8	1.8		3/35064	£76.86

<sup>\*</sup> Blades have flat tooth form.

### **NON-STICK COATED BLADES**

Non-stick PTFE coat to prevent resin build-up and increase sawblade life. trend

TOOTH FORM	ţ	Kerf
Bushing 15°	15°	o Dia — — Plate

ALTERNATE TOP BEVEL

Blade Type	Selector No.	Dia. mm	inch Nom	No. of Teeth	Bore mm	Washer mm	Kerf mm	Plate mm	Product Ref.	Price
	15	190	7-1/2	40	30	16 or 20	2.6	1.7	CSB/TC19040	£34.14
	25	250	10	60	30	16, 20 or 25.4	3.0	2.0	CSB/TC25060	£53.60


### **CORDLESS TRIM SAWBLADES**

Thin kerf anti-kickback sawblades for cordless trim



non-stick coated.

ALTERNATE TOP BEVEL




	Blade Type	Quick Selector No.	Dia. mm	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
	•	0	120	4-3/4	24	20	-	1.8	1.2	CSB/12024T	£20.74
		0	120	4-3/4	40	20	-	1.8	1.2	CSB/12040T	£29.71
	•	T2B.1	136	5-3/8	12	20	-	1.5	1.0	CSB/13612TA	£22.23
		T2B	136	5-3/8	24	10	-	1.5	1.0	CSB/13624T	£25.79
		T2B.1	136	5-3/8	24	20	-	1.5	1.0	CSB/13624TA	£25.79
r		T4.1	150	6	24	10	-	1.5	1.0 🛕	CSB/15024TB	£26.47
Ŋ,	•	T6	160	6-1/4	24	16	-	1.5	1.0 🛕	CSB/16024T	£24.34
	•	T8A	165	6-1/2	24	10	-	1.7	1.0	CSB/16524TA	£27.13
r	•	T8B.2	165	6-1/2	24	15.88	-	1.6	1.0	CSB/16524TC	£25.84
ŧ		T8B	165	6-1/2	24	20	-	1.5	1.0	CSB/16524T	£23.69
	•	T8C	165	6-1/2	24	30	-	1.5	1.0	CSB/16524TB	£25.79
		T8B	165	6-1/2	40	20	-	1.5	1.0	CSB/16540T	£25.79
		T8C	165	6-1/2	40	30	-	1.5	1.0	CSB/16540TB	£27.13
		T8B.3	165	6-1/2	42	20	-	1.9	1.3	CSB/16542TD	£26.47
		T8B.2	165	6-1/2	48	15.88	-	1.6	1.0	CSB/16548TC	£26.47
ck	0	T8B	165	6-1/2	52	20	-	1.5	1.0	CSB/16552T	£27.13
<b>Λ</b>		T12.4	184	7-1/4	24	16	-	1.8	1.2	CSB/18424TA	£26.34
	•	T12.1	184	7-1/4	24	20	-	1.8	1.2	CSB/18424T	£26.47
		T12.5	184	7-1/4	24	<b>♦</b> 5/8"	-	1.6	1.0	CSB/18424TW	£26.47
		T12.4	184	7-1/4	48	16	-	1.8	1.2	CSB/18448TA	£29.00
		T15.1	190	7-1/2	24	30	-	1.6	1.0	CSB/19024TC	£29.45
	•	T15	190	7-1/2	24	30	-	1.8	1.1	CSB/TC19024T*	£29.24
		T15	190	7-1/2	24	30	-	2.0	1.4	CSB/19024TB	£27.79
		T13.1	190	7-1/2	24	<b>♦</b> 5/8"	-	1.55	1.0	CSB/19024TW	£27.76
		T13.1	190	7-1/2	36	<b>♦</b> 5/8"	-	1.55	1.0	CSB/19036TW	£29.65
		T15.1	190	7-1/2	36	30	-	1.6	1.0	CSB/19036TC	£30.54
		T15	190	7-1/2	40	30	-	2.0	1.4	CSB/19040TB	£29.90
	0	T15.1	190	7-1/2	60	30	-	1.6	1.0	CSB/19060TC	£32.73
		T18.1	210	8	24	30	-	1.8	1.3	CSB/21024TC	£32.73
		T18.1	210	8	36	30	-	1.8	1.3	CSB/21036TC	£34.92
	0	T18.1	210	8	60	30	-	1.8	1.3	CSB/21060TC	£40.38

### **PLUNGE SAW PANEL TRIMMING BLADES**

For super fine trimming of panels. These blades have a triple chip tooth design with a positive hook for super fine finish. For plunge saws.

See page 131 for other blades for plunge saws.





Blade Type	Selector No.	Dia. mm	inch Nom	No. of Teeth		Kerf mm	Plate mm	Product Ref.	Price
	7.1	160	6-1/4	48	20	2.2	1.6	CSB/PT16048	£49.15
	8B.1	165	6-1/2	48	20	2.2	1.6	CSB/PT16548	£49.15
	18	210	8-1/4	60	30	2.4	1.6	CSB/PT21060	£53.56

### SAWBLADE TRIPLE PACKS




	wuiti-pa	CK OF Sam Quick	e dian	Dia.	wblades.					
	Blade Type	Selector No.	Dia. mm	inch Nom	No. of Teeth	Bore mm	Kerf mm	Plate mm	Product Ref.	Price
		7.1	160	6-1/4	3 x 48	20	2.2	1.6	N CSB/160/3PK	£59.71
		7/7.1	160	6-1/4	24/48/48(TCP)	20	2.2	1.6	N CSB/160/3PK/A	£79.00
		7.1	160	6-1/4	3 x 48(TCP)	20	2.2	1.6	N CSB/PT160/3PK	£98.30
		8B.1	165	6-1/2	3 x 48(TCP)	20	2.2	1.6	N CSB/PT165/3PK	£98.30
U		8B.1	165	6-1/2	3 x 48	20	2.2	1.6	N CSB/165/3PK/A	£56.73
١		T8B	165	6-1/2	24/40/52	20	1.5	1	N CSB/165/3PK/B	£52.92
N	••	T8B	165	6-1/2	2 x 24/40	20	1.5	1	N CSB/165/3PK/C	£49.48
۱		15	190	7-1/2	24/40/60	30	2.6	1.7	N CSB/190/3PK	£61.67
П		C19	216	8-1/2	24/48/60	30	2.6	1.7	N CSB/CC216/3PK	£90.59
IJ		25	250	10	48/60/84(TCP)	30	3	2	N CSB/250/3PK	£123.55

### **MITRE SAW CROSSCUTTING**



### ALTERNATE TOP BEVEL **TOOTH FORM**



- \* T = Anti-kickback with thin kerf for cordless saws. Blades QSNo. CT12.3, CT19.1, CT25A, CT30.3 are for Dewalt Flex Volt and have raker tooth.
- \* PTFE Non-stick coated.

Blade Type	Quick Selector No.	Dia.	Dia. inch Nom	No. of Teeth	Bore mm	Bushing Washer mm	Kerf mm	Plate mm	Product Ref.	Price
	CT12.3		7-1/4	24	16	-				
0	CT12.3	184 184	7-1/4	48	16	-	1.6	1.0	CSB/CC18424T CSB/CC18448T	£33.27 £34.97
$\frac{1}{0}$	CT12.3	184	7-1/4	60	16		1.6	1.0	CSB/CC18460T	£34.97 £38.24
0	C15	190	7-1/4	24	30	20	2.6	1.7	CSB/CC19024	£27.79
0	C15	190	7-1/2	48	30	20	2.6	1.7	CSB/CC19048	£29.90
	CT14.1	190	7-1/2	48	20	-	1.9	1.4	CSB/CC19048T	£31.69
00	CT14.1	190	7-1/2	60	20	-	1.9	1.4	CSB/CC19060T	£33.88
00	C15	190	7-1/2	60	30	20	2.6	1.7	CSB/CC19060	£33.34
0	C18	210	8-1/4	48	30	-	2.8	1.8	CSB/CC21048	£34.14
0	C18A	215	8-1/2	48	30	-	2.6	1.7	CSB/CC21548	£36.14
00	C18A	215	8-1/2	60	30	-	2.6	1.7	CSB/CC21560	£41.69
$\bigcirc$	C19	216	8-1/2	24	30	-	2.6	1.7	CSB/CC21624	£32.53
0	CT19.1	216	8-1/2	24	30	-	2.16	1.56	N CSB/CC21624T	£33.90
0	CT19.1	216	8-1/2	36	30	-	2.16	1.56	N CSB/CC21636T	£35.55
0	C19	216	8-1/2	48	30	-	2.6	1.7	CSB/CC21648	£36.14
$\circ$	C19	216	8-1/2	60	30	-	2.6	1.7	CSB/CC21660	£39.70
$\bigcirc \bigcirc$	CT19.1	216	8-1/2	60	30	-	2.16	1.56	N CSB/CC21660T	£40.85
$\bigcirc$	C25	250	10 nom.	24	30	16, 20 or 25.4	3.0	2.0	CSB/CC25024	£39.70
0	CT25A	250	10 nom.	24	30	-	2.16	1.56	CSB/CC25024T	£39.25
0	C25	250	10 nom.	42	30	16, 20 or 25.4	3.0	2.0	CSB/CC25042	£43.81
0	CT25A	250	10 nom.	60	30	-	2.16	1.56	CSB/CC25060T	£51.98
00	C25	250	10 nom.	72	30	16, 20 or 25.4	3.0	2.0	CSB/CC25072	£52.12
0	CT26	254	10	24	30	-	2.5	1.8	CSB/CC25424T*	£42.21
0	CT26	254	10	40	30	-	2.5	1.8	CSB/CC25440T*	£44.88
0	CT26	254	10	60	30	-	2.5	1.8	CSB/CC25460T*	£56.78
0	C27	255	10	42	30	-	2.4	1.8	CSB/CC25542	£42.49
00	C27	255	10	72	30	-	2.4	1.8	CSB/CC25572	£49.38
0	C28	260	10-1/4	24	30	-	2.6	2.0	CSB/CC26024	£36.14
0	C28.1	260	10-1/4	40	30	-	2.3	1.8	CSB/CC26040	£39.34
0	C28	260	10-1/4	42	30	-	2.6	2.0	CSB/CC26042	£42.49
0	C28.2	260	10-1/4	60	30	-	2.5	2.0	CSB/CC26060	£52.67
0	C28 C28	260 260	10-1/4 10-1/4	60 72	30	-	2.6	2.0	CSB/CCTC26060* CSB/CC26072	£54.24 £49.38
00	C28.1	260	10-1/4	80	30	-	2.6	1.3	CSB/CC26072 CSB/CC26080	£49.38 £49.17
	C30	305	12	24	30		3.0	2.0	CSB/CC30524	£49.17 £48.04
	C30.2	305	12	40	30		2.5	1.8	CSB/CC30540	£49.17
<del>0</del>	C30	305	12	48	30	-	3.0	2.0	CSB/CC30548	£56.37
0	C30.2	305	12	60	30	-	2.5	1.8	CSB/CC30560	£53.54
0	C30	305	12	60	30	-	3.0	2.2	CSB/CC30560A	£53.54
0	CT30.3	305	12	60	30	-	2.44	1.6	CSB/CC30560T	£54.11
0	C30	305	12	64	30	-	3.0	2.0	CSB/CC30564	£59.81
$\frac{1}{0}$	CT30.3	305	12	78	30	-	2.44	1.6	CSB/CC30578T	£65.78
00	C30.2	305	12	96	30	-	2.5	1.8	CSB/CC30596	£73.21
$\frac{1}{0}$	C30	305	12	108	30	-	3.0	2.0	CSB/CC305108	£91.47
									222,00000.00	

### **ALUMINIUM/PLASTIC & WORKTOPS**



TRIPLE CI FORM	HIP T	OOTH	
-6°	HH.	Dia — Plate	Plastic

Blade	Quick Selector	Dia.	Dia. inch	No. of	Bore	Bushing Washer	Kerf	Plate		
Туре	No.	mm	Nom	Teeth	mm	mm	mm	mm	Product Ref.	Price
	7.1	160	6-1/4	52	20	-	2.2	1.6	CSB/AP16052	£49.15
	8B.1	165	6-1/2	48	20	-	2.0	1.8	CSB/AP16548	£36.54
	12	184	7-1/4	58	16	-	2.8	1.9	CSB/AP18458	£37.57
	12.2	184	7-1/4	58	30	-	2.8	1.9	CSB/AP18458A	£39.34
	15	190	7-1/2	60	30	20	2.8	1.9	CSB/AP19060	£41.02
	C18A	215	8-1/2	64	30	-	2.8	1.9	CSB/AP21564	£54.91
	C19	216	8-1/2	64	30	-	2.8	1.9	CSB/AP21664	£52.30
	C19.2	216	8-1/2	64	30	-	2.3	1.7	N CSB/AP21664A	£50.78
	C19	216	8-1/2	80	30	-	2.8	1.9	CSB/AP21680	£59.28
	25	250	10 nom.	84	30	16, 20 or 25.4	3.0	2.0	CSB/AP25084	£66.03
	25	250	10 nom.	100	30	-	3.0	2.0	N CSB/AP250100	£68.96
	26	254	10	80	30	-	2.8	1.8	CSB/AP25480	£62.59
	26	254	10	96	30	-	2.8	1.8	CSB/AP25496	£71.60
	28	260	10-1/4	96	30	25	2.8	2.0	CSB/AP26096	£71.60
	29	300	11-7/8	96	30	-	3.0	2.0	CSB/AP30096	£77.80
	C30	305	12	80	30	-	3.0	2.2	CSB/AP30580	£65.41
	30	305	12	84	30	-	3.0	2.0	CSB/AP30584	£66.03

### CRAFTPRO BUSHING WASHERS (REDUCING RINGS)

All CraftPro Bushing Washer Refs. CSB/BW.. Priced at £2.51 each.

Use 1.1mm thick for blades up to 180mmØ Use 1.5mm thick for blades 190-235mmØ Use 1.7mm for blades 250mmØ



	Outside Dia. (OD) mm	Inside Dia. (ID) mm	Thickness mm	Product Ref.
ı	20	12.7 (1/2")	1.1	CSB/BW27
ł	20	16	1.1	CSB/BW17
	30	16	1.1	CSB/BW45
,	30	16	1.5	CSB/BW45A
d	30	16	1.7	CSB/BW45B
Ĭ	30	20	1.1	CSB/BW15

	Outside Dia.	Inside Dia.	Thickness	
	(OD) mm	(ID) mm	mm	Product Ref.
	30	20	1.5	CSB/BW15A
_	30	20	1.7	CSB/BW15B
_	30	25	1.5	CSB/BW12A
Α	30	25	1.7	CSB/BW12
A B	30	25.4 (1")	1.3	CSB/BW14A
	30	25.4 (1")	1.7	CSB/BW14



Bushing washers supplied to reduce bore diameter for certain makes and models of saw. Bushing washers must be pressed or glued into body of Trend CRAFTPRO sawblades only. Loose bushing washers/rings must not be used.

### **BORE SIZE COMPATIBILITY CHART FOR SAWBLADES**

Quick Selector

Quick Selector

			uick Selector			Qu		
Make	Dia.	Bore	No.	Make	Dia.	Bore	No.	Make
AEG				ELEKTRA BECKUM				DHS710Z
TKS42	130	20	2	KGS300/330, UK330, UK333	250	30(CC)	C25	BLS820
HK40	140	20	3	KGT500/550, PK250/K, TS250	250	30	25	LS0815FL
AHK52, HKS52, HK45, HK46, HK52	150	20	5	PK300K	300	30	29	SR2300, 5900BR
KK55A, HK55B, HK160A/B, K55S	160	20	7	KGS305	305	30	30	5903R
BKS18i	165	15.88(T)	T8B.2	TKCOMBI, TKHS315	315	30	31	LS1013
K66S, KS66S, KS66E	190	30	15	ERBAUER	010	- 00	01	MLS100
HK75	210	16(T)	-	ERB690CSW	185	20	12A	LS1030
AL-KO	210	10(1)		ERB566CSW	190	30	15.2	LS1018L, 1040/2, 1018L, 1019
Woodmaster, PKS (all), Pro Excel	315	30	31	ERB2504SE	250	30	25	LS1016
ATLAS COPCO	010	00	01	EVOLUTION	200	00	20	2704
TSK42	130	20	2	R165CCSL	165	20(P)	8B.1	LS1040, LF1000
PC55S	160	20	7	FEIN	103	20(٢)	OD. I	LS1214, LS1216, LH1040, LS1219, 12
HK66	190	16*	13	SSK646	150	20(T)		METABO
HKS66	190	20*	15	SSK660	160	16(T)	T6	KS0852S, KS08255
HK200, 201	200	30	16	SSK661	210	10(T)	-	KS55FS
HKS85	220	30	20	FERM				KSA18, KS18LTX57
BLACK & DECKER				18V	138	10(T)	T2C	KS1468S, KS1266S
KS40T	140	12.7*	3	FKS185	184	30	12.2	KS66, KSE68, KSP65
BD855, KS855	160	16*	7	FESTO (FESTOOL)				KSE1678, KGSE1670
KS555	165	30	8C	AXF45, AF45E	150	20	5	KGS255
P3703, KS865	180	30	11	ATF55/55E, AP55/55E	160	20	7	KGS216M, KS216M
64T, KS65, P3710	190	30	15	TS55EQ, TS55R, TS55S, HK5S	160	20(P)	7.1	KS6323S, KS1785S
SR700, BD800	210	20*	18	HKC55	160	20(P)	7.2	KGS303
SMS400	216	30(CC)	C19	AT55E, AX50, AU42S, AUT42S	170	30	-	KGS254
P3902	235	30	23	AP65E/65EB, AT65E/65EB	190	30	15	KS305M
SMS500	254	30 (CC)	CT26	AP68E, AXP65, AU65S, AD65	200	30	16	TKH315C
BOSCH		00 (00)	0.20	TS75	210	30	18	MILWAUKEE
GKS12V-26	85	15	M3.1	SYM70E	216	30(CC)	C19	M18CCS55, BLCS66, FCS66, CCS66
PKS46, GKS12V & 1923	150	16	4	KAPEX KS60	216	30(CC)	C19.2	MS216SB
GSK24V, GKS55GCE, PKS55	160	20	7	HK85	230	30(00)	21	MS305DB
GKT55GCE, GKS165		20	8B.1	AP85E/88E, AXP85	235	30	23	NUTOOL
GKS18VLI	165 165	20(T)	78B	KS120EB, KS88EGB	260	30(CC)	C28	NPT714-2
			_					
GKS55, 1567, 1563	170	30	9	AXP132E	350	30	32	PARKSIDE
1557	190	16	13	FELISATTI				Mini
GKS65, 1564, 1568, PKS66, GKS68B, GKS190	190	30	15	SCF160/1200	160	20	7	PERLES
PCM7, PCM7S, PPS7S	190	30(CC)	C15	PSF165/1300VES	165	20	8B	KS50
GKS755	210	20*	18	SCF190/1600S	190	20	14	KS70
PCM8S	210	30(CC)	C18	SCF210/1900S	210	30	18	PEUGEOT
GCM8, GCM800SJ	216	30(CC)	C19	SCF210/1900VES	210	30	18	SC53C, TC3009
GKS85S, 1566, 1653	220	30	20	MTF216/1100T	216	20	-	SC66E, 66C
GSM10S	254	16(CC)*	CT26	SCF235/2000S	235	30	23	TC3017
GCM10SD, GCM10J, GM350-254	254	30(CC)	CT26	MTF250/1200ST Raptor	250	20(CC)	-	TC3014
GCM12SD, GTN12, GCM12GDL	305	30(CC)	C30	MTF250/1500T	250	30(CC)	C25	REXON
GCM12-SDE	305	30(CC)	C30.2	MTF250/1700T	250	30(CC)	C25	MS-10RA
CASALS	000	00(00)	000.2	MTF305/1600ST Rex	250	20(CC)	-	BTS-10A
BSC150, VSC50	150	30	4.2	SRF305/1800	305	30(CC)	C30	M2501A
SC210, VSC70	210	16*	13	FREUD	000	50(50)	000	RYOBI
SC230	230	30	21	FCS184	184	10(T)	-	CS1201
CHARNWOOD				FCS230	230	30(CC)	_	W5002
	255	30(CC)	C27	HITACHI (HIKOKI)	200	00(00)		CCS18011/LM
			OLI				5	CW-1801/150
W240				L FC5SA1	150	20		
DEWALT			M6	FC5SA1	150	20		
DEWALT DCS571N-XJ	115	9.5	M6 T2B	C6DA, FC65SA	160	20	7	LCS180
DEWALT DCS571N-XJ DW936	115 136	9.5 10	T2B	C6DA, FC65SA C18DBAL, C3606DA-36V	160 165	20 20(T)	7 T8B	LCS180 W5502
<b>DEWALT</b> DCS571N-XJ DW936 DW351	115 136 150	9.5 10 20	T2B 5	C6DA, FC65SA C18DBAL, C3606DA-36V C6U	160 165 165	20 20(T) 30	7 T8B 8C	LCS180 W5502 CW-1801/165
DEWALT DCSS71N-XJ DW936 DW351 DW007	115 136 150 165	9.5 10 20 10(T)	T2B 5 T8A	C6DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM	160 165 165 165	20 20(T) 30 30(T)	7 T8B 8C T8C	LCS180 W5502 CW-1801/165 W6502
DEWALT DCS571N-XJ DW936 DW351 DW007 DW5520K	115 136 150 165 165	9.5 10 20 10(T) 20 (P)	T2B 5 T8A 8B.1	C6DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6	160 165 165 165 170	20 20(T) 30 30(T) 16	7 T8B 8C T8C 9.1	LCS180 W5502 CW-1801/165 W6502 W6402C
DEWALT DCSS71N-XJ DW936 DW936 DW951 DW007 DWS520K DC390, DWE007, DCS391, DCS391N	115 136 150 165 165 165	9.5 10 20 10(T) 20 (P) 20(T)	T2B 5 T8A 8B.1 T8B	C6DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU	160 165 165 165 170 180	20 20(T) 30 30(T) 16 30	7 T8B 8C T8C 9.1	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G
DEWALT DCS571N-XJ DW936 DW936 DW351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560	115 136 150 165 165 165 184	9.5 10 20 10(T) 20 (P) 20(T) 16	T2B 5 T8A 8B.1 T8B 12	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3	160 165 165 165 170 180 184	20 20(T) 30 30(T) 16 30 30	7 T8B 8C T8C 9.1 11 12.2	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366
DEWALT  DCSS71N-XJ  DW936  DW351  DW007  DW5520K  DC390, DWE007, DCS391, DCS391N  DW62, DWE560  DCS570N	115 136 150 165 165 165 184 184	9.5 10 20 10(T) 20 (P) 20(T) 16 16	T2B 5 T8A 8B.1 T8B 12 T12.4	C8DA, FC65SA C18DBAL, C3606DA-36V C8U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7	160 165 165 165 170 180 184 190	20 20(T) 30 30(T) 16 30 30 16*	7 T8B 8C T8C 9.1 11 12.2	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801
DEWALT   DCS571N-XJ   DCS571N-XJ   DW936   DW936   DW351   DW007   DWS520K   DC390, DWE007, DCS391, DCS391N   DW62, DWE560   DCS570N   DCS361M, DCS365N   DCS365N   DCS656N   DCS656N   DCS665N   DCS656N   DCS665N	115 136 150 165 165 165 184 184	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3	C6DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA	160 165 165 165 170 180 184 190	20 20(T) 30 30(T) 16 30 30 16*	7 T8B 8C T8C 9.1 11 12.2 13	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L
DEWALT	115 136 150 165 165 165 184 184 184	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3	160 165 165 165 170 180 184 190 190	20 20(T) 30 30(T) 16 30 30 16* 20	7 T8B 8C T8C 9.1 11 12.2 13 15	LCS180 W5502 CW-1801/165 W6502 W6602C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221
DEWALT	115 136 150 165 165 165 184 184 184 184	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE	160 165 165 165 170 180 184 190 190 190 216	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C
DEWALT	115 136 150 165 165 165 184 184 184 184 190	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1	C8DA, FC65SA C18DBAL, C3606DA-36V C8U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS	160 165 165 165 170 180 184 190 190 216 216	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A	LCS180 W5502 CW-1801/165 W6602 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825
DEWALT	115 136 150 165 165 165 184 184 184 184 184 190	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) \$\infty\$5.8"(T) 30	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U	160 165 165 165 170 180 184 190 190 216 216 235	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL
DEWALT	115 136 150 165 165 165 184 184 184 184 184 190 190	9.5 10 20 10(T) 20 (P) 20(T) 16 16(CC)(T) 20(T) ◆ 5.8°(T) ◆ (T) 30 30(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA	160 165 165 165 170 180 184 190 190 216 216 235 250	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30(30)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825
DEWALT	115 136 150 165 165 165 184 184 184 184 184 190	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) \$\infty\$5.8"(T) 30	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1	C8DA, FC65SA C18DBAL, C3606DA-36V C8U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C3U	160 165 165 165 170 180 184 190 190 216 216 235	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25 C27	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS24EL HSM1426LHG, ETMS1825 TSS-305, EMS305RG
DEWALT	115 136 150 165 165 165 184 184 184 184 184 190 190	9.5 10 20 10(T) 20 (P) 20(T) 16 16(CC)(T) 20(T) ◆ 5.8°(T) ◆ (T) 30 30(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, C9U C10FA, C10FB, C10FCA C12FCH, C12FSH	160 165 165 165 170 180 184 190 190 216 216 235 250	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30(30)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 SCHEPPACH
DEWALT	115 136 150 165 165 165 184 184 184 184 190 190 190 210	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  (T) 30(T) 30(T)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1	C8DA, FC65SA C18DBAL, C3606DA-36V C8U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C3U	160 165 165 165 170 180 184 190 190 216 216 235 250 255	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25 C27	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS24EL HSM1426LHG, ETMS1825 TSS-305, EMS305RG
DEWALT	115 136 150 165 165 165 184 184 184 184 190 190 210 216	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16 16(CC)(T) 20(T) 30 (T) 30(T) 30(CC)	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, C9U C10FA, C10FB, C10FCA C12FCH, C12FSH	160 165 165 165 170 180 184 190 190 216 216 235 250 255	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25 C27	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 SCHEPPACH
DEWALT	115 136 150 165 165 165 184 184 184 184 190 190 210 216 235	9.5 10 20 10(T) 20 (P) 20 (P) 16 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ (T) 30(T) 30(T) 30(CO) 30	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C3U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER	160 165 165 165 170 180 184 190 190 216 216 235 250 255 305	20 20(T) 30 30(T) 16 30 30 16° 20 30 30(CC) 30(CC) 30 30(CC) 30 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25 C27 C30	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1286, EWS1386 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER
DEWALT	115 136 150 165 165 165 184 184 184 184 190 190 210 216 235	9.5 10 20 10(T) 20 (P) 20 (P) 16 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ (T) 30(T) 30(T) 30(CO) 30	T2B 5 T8A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106	160 165 165 165 170 180 184 190 190 216 216 235 250 255 305	20 20(T) 30 30(T) 16 30 30 16* 20 30 30(CC) 30(CC) 30(CC) 30(CC) 20	7 T8B 8C T8C 9.1 11.2.2 13 15 C19 C19A 23 25 C27 C30	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L T5221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75
DEWALT	115 136 150 165 165 165 165 184 184 184 190 190 210 216 235 240	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 1.8"(T) (T) 30 30(T) 30(CC) 30 30	T2B 5 18A 18B 12 1712.4 CT12.3 T12.1 15 T15.1 T18.1 C19 23 24	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12FSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119	160 165 165 165 170 180 184 190 190 216 235 250 255 305	20 20(T) 30 30(T) 16 30 30 16* 20 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 15 C19 C19A 23 25 C27 C30	LCS180 W5502 CW-1801/165 W6502 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS1405RG SCHEPPACH WOODSTER PL55 PL55-P2
DEWALT	115 136 150 165 165 165 184 184 184 184 190 190 210 210 235 240	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ (T) 30 30(T) 30(CC) 30 30 30 30(CC)	T2B 5 18A 8B.1 T8B 12 12 T12.4 CT12.3 T12.5 T13.1 15 T15.1 T18.1 C19 23 24	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120	160 165 165 165 170 180 184 190 190 216 235 250 255 305	20 20(T) 30 30(T) 16 30 30 16* 20 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 15 C19 C19A 23 25 C27 C30	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L T5221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75
DEWALT DCS571N-XJ DCS571N-XJ DW936 DW351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560 DCS570N DCS361M, DCS365N DC300KL DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS575 DCS7485 DW700, 701, 707, 777, 770, 773, 774 DW383 DW383 DW383 DW384 DW384 DW742, 743, 710, 744, 745, 746, DWE7491, DWE7492 DCS577, 778N	115 136 150 165 165 165 184 184 184 190 190 210 2210 235 240 250 250	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ (T) 30 30(T) 30(CC) 30 30 30 30 30 30 30 30 30 30	T2B 5 18A 8B.1 18B 12 1712.4 CT12.3 1712.1 1712.5 1713.1 15 1715.1 1718.1 C19 23 24 25 CT25A C25	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JGB	160 165 165 165 170 180 184 190 190 216 216 235 250 255 305	20 20(T) 30 30(T) 16 30 30 16* 20 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	7 T8B 8C T8C 9.1 11 12.2 13 15 15 C19 C19A 23 25 C27 C30 7	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT33000, RMS-1825 ETS1525, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL55 MSS8DB
DEWALT DCS571N-XJ DCS571N-XJ DW936 DW936 DW351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560 DCS570N DCS361M, DCS365N DC300KL DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS578 DCS7485 DW700, 701, 707, 777, 770, 773, 774 DW383 DW86, DW365, DW5757 DW742, 743, 710, 744, 745, 746, DW57491, DW57492 DCS577N, 778N DW250, 1251, 1501, 710, 1751/3, 720, 778, 717XPS DW709	115 136 150 165 165 165 184 184 184 190 210 2210 2210 2210 2250 250 260	9.5 10 20 10(T) 20 (P) 20(T) 20(T) 16 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ (T) 30(T) 30(T) 30(CC) 30 30(CC) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 25 CT25A C25 28	CaDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB 18CS-B 18V	160 165 165 165 165 170 180 184 190 216 235 250 305 160 190 230	20 20(T) 30 30(T) 16 30 30 30 30(CC) 30(CC) 30(CC) 30(CC) 20 20 30 30 30 30 30 30 30 30 30 30 30 30 30	7 T8B 8C SC T8C 9.1 111 12.2 13 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B	LCS180 W5502 CW-1801/165 W6502 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L T5221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55 PL55 PL55 PL55 PL55 PS-22 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S
DEWALT DCS5771N-XJ DCS5771N-XJ DW936 DW351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560 DCS570N DCS361M, DCS365N DC300KL DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS7485 DW700, 701, 707, 777, 770, 773, 774 DW383 DW86 DW742, 743, 710, 744, 745, 746, DWE7491, DWE7492 DCS577N, 778N DW250, 1251, 1501, 710, 1751/3, 720, 778, 717XPS DW709 DW704, 705, 8001/3, 8101/3, 721	115 136 150 165 165 165 184 184 184 190 210 216 235 240 250 250 260 300	9.5 10 20 10(T) 20 (P) 20(P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ (T) 30 30(T) 30(CC) 30 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 C19 23 24  25 CT25A C25 28 C29	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C3U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 18CS-B 18V MAFELL KSS40	160 165 165 165 165 170 180 190 190 216 225 255 255 255 250 230 165 165 160 190 230	20 20(T) 30 30(T) 16 30 30 16* 20 30(CC) 30(CC) 30(CC) 30(CC) 20 30(CC) 20 30(CC)	7 T8B 8C SC 78C 9.1 11 12.2 13 15 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989)
DEWALT	115 136 150 165 165 165 165 165 184 184 184 190 210 221 221 250 250 250 260 300 300	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) • (T) 30 30(T) 30(CC) 30 30 30 30 30 30 30 30 30 30	T2B 5 18A 8B.1 18B 12 1712.4 CT12.3 1712.1 1712.5 1713.1 15 23 24 25 CT25A C25 28 C29 C29	CGDA, FC65SA C18DBAL, C3606DA-36V CGU C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C9FC, C9FS PSU9, C3U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55	160 165 165 165 170 180 184 190 216 225 255 305 160 190 230	20 20(T) 30 30(T) 16 30 30 30 30 20 30 30(CC) 30(CC) 30 30(CC) 20 30 30(CC) 20 30 30(CC) 20 30 30(CC) 30(CC	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS1426LHG, ETMS1825 SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989)
DEWALT	115 136 150 165 165 165 165 184 184 184 190 190 210 221 225 240 250 260 300 300 305	9.5 10 20 10(T) 20(P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) ◆ 5.8"(T) • (T) 30 30(T) 30(CC) 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 25 CT25A C25 28 C29 C29 C29 C30	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB IBCS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP5S, KSS400	160 165 165 165 167 180 184 190 216 216 225 250 255 305 160 190 165 165 160 160	20 20(T) 30 30(T) 16 30 30 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 20 20 20(T) 20(T) 20(P)	7 T8B 8C SC T8C 9.1 111 112.2 13 15 5 C19 C19A 23 25 C27 C30 7 T5 21 T8.B	LCS180 W5502 CW-1801/165 W6502 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHIEPPACH WOODSTER PL55 PL55 PL55 PL55 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989)
DEWALT	115 136 150 165 165 165 165 165 184 184 184 190 210 216 225 240 300 300 305 305	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) 30 30(T) 30(T) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 23 24 25 CT25A C25 C29 C29 C30 C30 CT30.2	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB 18CS-B 18V MAFELL KSS40 MKSS5, SS55, KSS30, KST55 KSP55, KSS400 MS55	160 165 165 170 180 184 190 190 216 235 250 255 305 160 190 120 165 165 160 160 160 160	20 20(T) 30 30(T) 16 30 30 16' 20 30(CC) 30(CC) 30(CC) 20 30(CC) 20 30(CC) 20(T)	7 T8B 8C T8C 9.1 11 11 12.2 13 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1286, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK
DEWALT	115 136 150 165 165 184 184 184 190 210 210 225 250 250 250 305 305 305 315	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) 4 5.8*(T) 30 30(T) 30(CC) 30 30 30(CC)	T2B 5 18A 8B.1 18B 12 112.4 112.5 113.1 15 115.1 118.1 19 23 24 25 CT25A C25 28 C29 C29 C30 CT30.2 31	CaDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UGB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP55, KSS400 MS55	160 165 165 170 180 190 190 216 235 250 305 160 160 160 160 160 162	20 20(T) 30 30(T) 16 30 30 30 30 30 30(CC) 30(CC) 30 30(CC) 20 30 30(CC) 20(T) 20(T) 20(T) 20(T) 20(T) 20(T)	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 15 15 23 25 C27 C30 7 15 21 T8.B 0 7 7.1 15 8D	LCS180 W5502 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315
DEWALT	115 136 150 165 165 165 165 165 184 184 184 190 210 216 225 240 300 300 305 305	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) 30 30(T) 30(T) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 23 24 25 CT25A C25 C29 C29 C30 C30 CT30.2	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH H012HER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB HSCS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP55, KSS400 MS55 MT5SCC, MT55, 18MBC ERIKA80E, KSP65F	160 165 165 170 180 190 190 216 235 250 305 160 160 160 160 160 190	20 20(T) 30 30(T) 16 30 30 30(T) 16 30 30 30(CC) 30(CC) 30(CC) 30(CC) 20 30 30(CC) 20 20(T) 20(T) 20(T) 20 (P) 20 (T) 30 30 30(CC) 30(C	7 T8B 8C T8C 9.1 11 112.2 13 15 15 C19 C19A 23 25 C27 C30 7 T8.B 0 7 7.1 T6 8D 15	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHIEPPACH WOODSTER PL55 PL55 PL55 PL55 PL55 PL55 PS-20 RCS20, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL
DEWALT	115 136 150 165 165 165 184 184 184 190 210 221 250 250 250 300 300 305 305 315	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) 30 30 30(T) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24  25 CT25A C25 C29 C29 C29 C29 C30 CT30.2 31 C32	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, O3U C10FA, C10FB, C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 18CS-B 18V MAFELL KSS40 MKS55, KSS400 MS55 MT5SCC, MT55.18MBC ERIKABOE, KSP65F KSP85F	160 165 165 165 170 180 190 190 216 226 225 305 160 190 230 165 160 160 160 160 160 160 160 160 160 160	20 20(T) 30 30 30(T) 16 30 30 30 30(CC) 30(CC) 30(CC) 20 30(CC) 20 20(T) 20(T) 20(T) 20(F) 20(F) 20(F) 20(F)	7 T8B 8C T8C 9.1 11 11.2.2 13 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B	LCS180 W5502 CW-1801/165 W6502 W6402C W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini
DEWALT	115 136 150 165 165 165 184 184 184 189 190 210 216 225 250 260 305 305 305 315	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  ◆ 5.8"(T) 30 30(T) 30(CC) 30 30 30(CC) 10(T)	T2B 5 18A 8B.1 18B 112 1712.4 CT12.3 1712.1 15 1713.1 15 24 25 CT25A C25 28 C29 C29 C29 C30 C30 CT30.2 31 C32 T2C	CaDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB MKS55, SS55, KSS330, KST55 KSPS5, KSS400 MKS55 MKS55 MT5SCC, MT55.18MBC ERIKA60E, KSP65F KSP85 TFK85	160 165 165 165 170 180 180 190 216 225 225 225 225 305 160 190 160 160 160 160 160 160 160 160 160 16	20 20(T) 30 30 30(T) 16 30 30 30 30 30(CC) 30(CC) 30 30(CC) 20 30 30(CC) 20(T) 20(T) 20(T) 20(F) 20(F) 30 30 30(CC) 30(CC	7 T8B 8C 9.1 11 12.2 13 15 15 15 C19 A 23 25 C27 C30 T8.B 0 7 7 15 21 T8.B 0 7 7 7.1 6 8D 15 21 15 15 15 15 15 15 15 15 15 15 15 15 15	LCS180 W5502 W5602 CW-1801/165 W6502 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM
DEWALT	115 136 150 165 165 165 184 184 184 190 190 210 2210 225 250 260 300 305 305 305 305 350	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 1.8"(T) 30 30(T) 30(CC) 30 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 25 CT25A C25 28 C29 C29 C30 CT30.2 31 C32 T2C 5	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH H0LZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB HSCS, KSS30, KST55 KSP55, KSS400 MSS5 KSP55, KSS400 MSS5 KSP5F, KSS400 MSS5 KSP6F KSP8F TFK85 ERIKA65E	160 165 165 165 170 180 190 190 216 226 225 305 160 190 230 165 160 160 160 160 160 160 160 160 160 160	20 20(T) 30 30 30(T) 16 30 30 30 30(CC) 30(CC) 30(CC) 20 30(CC) 20 20(T) 20(T) 20(T) 20(F) 20(F) 20(F) 20(F)	7 T8B 8C T8C 9.1 11 11.2.2 13 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B	LCS180 W5502 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C EMS256, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 ETS1525, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHIEPPACH WOODSTER PL55 PL55 PL55 PL55 PL55 PL55 PL55 PL5
DEWALT	1155 136 150 165 165 165 165 184 184 184 190 210 2210 2210 2250 2250 2250 2250 300 300 305 315 350	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 20(T) ◆ 5.8"(T) 30 30 30(CC)	T2B 5 18A 8B.1 18B 112 112.4 112.5 113.1 15 115.1 118.1 19 23 24 25 CT25A C25 28 C29 C29 C29 C29 C30 CT30.2 31 C32 T2C 5 8B.1	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, O3U C10FA, C10FB, C10FCA C10FCA C10FCA C10FCB 1217, 2119 2118, 2120 JCB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP55, KSS400 MS55 MT5CC, MT55.18MBC ERIKABCE ERIKABCE ERIKABCE ERIKABCE KSP6F KSP8F TFK85 ERIKABCE MAKITA	160 165 165 165 170 180 180 190 216 225 250 255 305 160 160 160 160 160 160 160 230 315 250	20 20(T) 30 30(T) 16 30 30 30(T) 16* 20 30(CC) 30(CC) 30(CC) 20(CC) 20(T) 20(T) 20(T) 20(T) 20(F) 20(F) 20(F) 30(CC)	7 T8B 8C T8C 9.1 11 11 12.2 13 15 C19 C19A 23 25 C27 C30 7 15 21 T8.B 0 7 7.1 T6 8D 15 21 31 25	LCS180 W5502 CW-1801/165 W6502 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L T5221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 180H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854
DEWALT	115 136 150 165 165 165 184 184 184 184 190 210 216 225 250 260 305 305 305 305 315 350	9.5 10 20 10(T) 20 (P) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  ◆ 5.8"(T) 30 30(T) 30(CC) 30 30 30(CC)	T2B 5 18A 8B.1 178B 112 1712.4 1712.5 1713.1 15 1715.1 1718.1 1718.1 23 24 25 C725A C25 28 C29 C29 C30 C30 C32 T32 T32 T32 T32 T32 T32 T32 T32 T32 T	CaDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MKS55, SS55, KSS330, KST55 MT55CC, MT55.18MBC ERIKA60E, KSP65F KSP6F TFK65 ERIKA6EE MAKITA HS301	160 165 165 165 165 170 180 184 190 216 235 250 160 190 230 165 160 160 160 160 162 190 230 305	20 20(T) 30 30 30(T) 16 30 30 30 30 30(CC) 30(CC) 30 30(CC) 30 30(CC) 20 20 20 20 20 20 30 30 30 30 30 30 30 30 30 30 30 30 30	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 C19A 23 25 C27 C30 T8.B 0 7 7 7.1 T6 8D 15 21 25 M3.1	LCS180 W5502 W5602 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1409H, 14109H 1855, 416H, 1522, 1410, 1854 5740, 5590
DEWALT	115 136 150 165 165 165 184 184 184 190 190 210 216 225 250 260 300 305 305 305 305 350 188 150 165 188 189 190 190 190 190 190 190 190 190 190 19	9.5 10 20 10(T) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 20(T)	T2B 5 18A 8B.1 18B 112 112.4 112.5 113.1 15 115.1 118.1 19 23 24 25 CT25A C25 28 C29 C29 C29 C29 C30 CT30.2 31 C32 T2C 5 8B.1	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH H0LZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 118, S55, KSS330, KST55 KSP55, KSS400 MS55 KSP55, KSS400 MS55 KSP55, KSS400 MS55 KSP65F KSP86F TFK86 ERIKA60E, KSP65F KSP86F TFK86 ERIKA65E MAKITA HS301 BSS5012	160 165 165 165 170 180 184 190 216 235 250 255 305 160 160 160 160 160 160 160 162 190 230 230 250 250 250 250 250 250 250 250 250 25	20 20(T) 30 30(T) 16 30 30 30(T) 16 20 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 20(T) 20(T) 20(T) 20(P) 20 (T) 20 (P) 20 (T) 20 (P) 20 (T) 20 (P) 20 (T) 20 (T) 30 (T) 30 (T) 20 (T) 30 (T)	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 16 23 25 C27 C30 7 T8.B 0 7 7.1 T6 8D 15 21 31 31 31 55 21 T2B.1	LCS180 W5502 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, ETS1625, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 57740, 5590 1866U2 Classic
DEWALT	115 136 150 165 165 165 184 184 184 184 190 210 216 225 250 260 305 305 305 305 315 350	9.5 10 20 10(T) 20 (P) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  ◆ 5.8"(T) 30 30(T) 30(CC) 30 30 30(CC)	T2B 5 18A 8B.1 178B 112 1712.4 1712.5 1713.1 15 1715.1 1718.1 1718.1 23 24 25 C725A C25 28 C29 C29 C30 C30 C32 T32 T32 T32 T32 T32 T32 T32 T32 T32 T	CaDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MKS55, SS55, KSS330, KST55 MT55CC, MT55.18MBC ERIKA60E, KSP65F KSP6F TFK65 ERIKA6EE MAKITA HS301	160 165 165 165 165 170 180 184 190 216 235 250 160 190 230 165 160 160 160 160 162 190 230 305	20 20(T) 30 30 30(T) 16 30 30 30 30 30(CC) 30(CC) 30 30(CC) 30 30(CC) 20 20 20 20 20 20 30 30 30 30 30 30 30 30 30 30 30 30 30	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 C19A 23 25 C27 C30 T8.B 0 7 7 7.1 T6 8D 15 21 25 M3.1	LCS180 W5502 W5602 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1409H, 14109H 1855, 416H, 1522, 1410, 1854 5740, 5590
DEWALT           DCS571N-XJ           DW936           DW351           DWS520K           DCS390, DWE007, DCS391, DCS391N           DW62, DWE560           DCS570N           DCS361M, DCS365N           DC300KL           DCS577 (USA)           DCS577 (UK)           DW65, DW365, DWE575K, DWE576K           DCS578           DCS7485           DW700, 701, 707, 777, 770, 773, 774           DW383           DW86           DW742, 743, 710, 744, 745, 746,           DWE50, 1251, 1501, 710, 1751/3, 720, 778, 717XPS           DW709           DW704, 705, 8001/3, 8101/3, 721           DW24700           D2105, DWS780, DWS780XPS           DHS5780           DW3151 SAWKING, D27400           DW1601/3, 728, 729           DRAPER           CCS1540           CS184, PT185           MSM210A, MS210B	115 136 150 165 165 165 184 184 184 190 190 210 216 225 250 260 300 305 305 305 305 350 188 150 165 188 189 190 190 190 190 190 190 190 190 190 19	9.5 10 20 10(T) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 20(T)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 T15.1 T18.1 C23 24 25 CT25A C25 28 C29 C30 CT30.2 31 C32 T2C 5 8B.1 T2C T2C 5 8B.1 T2C T18	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH H0LZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 118, S55, KSS330, KST55 KSP55, KSS400 MS55 KSP55, KSS400 MS55 KSP55, KSS400 MS55 KSP65F KSP86F TFK86 ERIKA60E, KSP65F KSP86F TFK86 ERIKA65E MAKITA HS301 BSS5012	160 165 165 165 170 180 184 190 216 235 250 255 305 160 160 160 160 160 160 160 162 190 230 230 250 250 250 250 250 250 250 250 250 25	20 20(T) 30 30(T) 16 30 30 30(T) 16 20 30 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 30(CC) 20(T) 20(T) 20(T) 20(P) 20 (T) 20 (P) 20 (T) 20 (P) 20 (T) 20 (T) 30 (T) 30 (T) 20 (T) 30 (T)	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 16 23 25 C27 C30 7 T8.B 0 7 7.1 T6 8D 15 21 31 31 31 55 21 T2B.1	LCS180 W5502 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, ETS1625, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 57740, 5590 1866U2 Classic
DEWALT DCS571N-XJ DCS571N-XJ DW936 DW351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560 DCS570N DCS361M, DCS365N DC300KL DCS577 (USA) DCS577 (USA) DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS575 DCS7485 DW700, 701, 707, 777, 770, 773, 774 DW383 DW86 DW742, 743, 710, 744, 745, 746, DWE7491, DWE7492 DCS577N, 778N DW250, 1251, 1501, 710, 1751/3, 720, 778, 717XPS DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 DZ7105, DWS780, DWS780XPS DHS5780 DW3151 SAWKING, D27400 DW1601/3, 728, 729 DRAPER CCS1540 CS154 CS153 PS1200D CS184, PT185 SMS210A, MS210B BTS250	115 136 150 165 165 165 184 184 184 190 210 216 235 250 250 305 305 315 350 138 148 210 250 250 250 250 250 250 250 250 250 25	9.5 10 20 10(T) 20 (P) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  ◆ 5.8"(T) 30 30(T) 30(CC) 50(CC) 30(CC) 50(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 25 C725A C25 28 C29 C29 C30 C30 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18	CGDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 UCB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MKS55 MT55CC, MT55.18MBC ERIKA80E, KSP65F KSP65F TFK85 ERIKA85E MAKITA HS301 BSS5012 5600NB 5603R, 5604R, 5621DWB	160 165 165 165 170 180 190 190 216 235 250 255 250 230 160 160 160 160 160 162 230 315 250 250 250 250 250 250 250 250 250 25	20 20(T) 30 30(T) 16 30 30 30(T) 16 20 30 30(CC) 30(CC) 30(CC) 20(T) 20(T) 20(T) 20(T) 20(P) 20(P) 30 30 30(CC)	7 T8B 8C T8C 9.1 11 112.2 13 15 C19 C19A 23 25 C27 C30 7 T5 21 T8.B 0 7 7.1 T6 8D 0 7 7.1 T6 8D 15 21 31 31 52 6	LCS180 W5502 CW-1801/165 W6502 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L T5221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 180H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590
DEWALT	115 136 150 165 165 165 165 165 165 165 165 165 165	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) 4	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 25 CT25A C25 28 C29 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, C9U C10FA, C10FB, C10FCA C12FCH, C12FSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 118CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP55, KSS400 MS55 KSP65F, KSS400 MS55 KSP65F, KSS400 MS55 KSP65F, KSS400 MS55 ERIKA60E, KSP65F KSP86F TFK86 ERIKA65E MAKITA HS301 BSS5012 56000R SF603R, 5604R, 5621DWB SP-6000K, SP6000K1, BSS6102, 610RFE,	160 165 165 165 170 180 184 190 216 235 250 255 305 160 160 160 160 162 190 230 230 230 165 160 160 160 160 160 160 160 160 160 160	20 (20(T) 30 (30) 30 (30) (30) (30) (30) (30) (3	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 15 15 23 25 C27 C30 7 T8.B 0 7 7.1 T6 8D 15 21 31 31 55 21 31 31 55 21 31 31 66 8C	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525, BT3000, RMS-1825 ETS1525, ETS1626, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1866U2 Classic 5266, 56266, 5666 1986U, 1985U, 1525H, Legend STANLEY FATMAX
DEWALT	115 136 150 165 165 165 184 184 184 190 210 216 235 250 250 305 305 315 350 138 148 210 250 250 250 250 250 250 250 250 250 25	9.5 10 20 10(T) 20 (P) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  ◆ 5.8"(T) 30 30(T) 30(CC) 50(CC) 30(CC) 50(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 25 C725A C25 28 C29 C29 C30 C30 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB HSCS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP5B, KSS400 MS55 MT5SCC, MT55.18MBC ERIIKABCE, KSP65F KSP85F TFK85 ERIIKABCE ERIIKABCE MKK1TA HS301 BSSS5012 5600NB S603R, 5604R, 5621DWB SP-6000K, SP6000K1, BSS6102, 610FFE, 6112, DHS630FFE, 5604R, HS6601	160 165 165 165 170 180 190 190 216 235 250 255 250 230 160 160 160 160 160 162 230 315 250 250 250 250 250 250 250 250 250 25	20 20(T) 30 30(T) 16 30 30 30(T) 16 20 30 30(CC) 30(CC) 30(CC) 20(T) 20(T) 20(T) 20(T) 20(P) 20(P) 30 30 30(CC)	7 T8B 8C T8C 9.1 11 112.2 13 15 C19 C19A 23 25 C27 C30 7 T5 21 T8.B 0 7 7.1 T6 8D 0 7 7.1 T6 8D 15 21 31 31 52 6	LCS190 W5502 CW-1801/165 W6502 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1625, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55 PL55 PL55 PL55 PL55 PL55 PS00, KSE250, HS100S TS4000 (pre 1989) HM120L TX, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 180H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1866UZ Classic 5266, 56266, 5866 1986U, 1985U, 1525H, Legend STANLEY FATMAX FNC60B-XJ
DEWALT	115 136 150 165 165 165 165 165 165 165 165 165 165	9.5 10 20 10(T) 20 (P) 20(P) 20(T) 16 16 16(CC)(T) 30 30(T) 30(T) 30(CC)	T2B 5 18A 8B.1 18B 112 112 112.4 112.5 113.1 15 115.1 115.1 115.1 115.1 122 23 24 25 CT25A C25 28 C29 C29 C30 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18 25 C25 31	Cada, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH H012HER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MKS55 MT55CC, MT55.18MBC ERIKA85E TFK85 ERIKA85E TFK85 ERIKA85E MKITA HS301 BSS5012 56000R S9-6000K, SP6000K1, BSS6102, 610RFE, 6112, DHS630RFE, 5604R, HS6601 DSS6102, BSS610Z, DHS660Z,	160 165 165 165 165 170 180 184 190 216 235 250 250 160 160 160 160 162 230 305	20 20(T) 30 30(T) 16 30 30 30(T) 16 30 30 30(T) 20(T) 20(T) 20(T) 20(T) 30 30 30 30 30 30 30 30 30 30 30 30 30	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 15 15 17 23 25 C27 C30 C30 T8C 7 7 15 21 T8.B 0 7 7 7.1 16 8D 15 15 21 15 21 25 25 27 27 28 29 20 20 20 20 20 20 20 20 20 20	LCS180 W5502 W5602 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1409H, 14109H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1868U2 Classic 5266, 56266, 58666 1986U, 1985U, 1525H, Legend STAYLEY FATMAX FMC660B-XJ STAYLEY FATMAX FMC660B-XJ STAYLER
DEWALT	115 136 150 165 165 165 184 184 184 190 190 210 216 225 250 300 305 305 305 305 305 305 305 305 3	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) 4 (58"(T) 30 30(T) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 T15.1 T18.1 C19 23 24 C25 C725 28 C29 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 118, 2120 JCB 118, 2120 JCB 118, C3FS KSPSS, KSS330, KST55 KSPSS, KSS35, KSS330, KST55 KSPSS, KSSSS, KSS330, KST55 KSPSS, KSSSS, KSS330, KST55 KSPSS, KSSSS, KSSSSS, KSSSSSS, KSSSSS, KSSSSSS, KSSSSSS, KSSSSSS, KSSSSSSSS	160 165 165 165 165 170 180 184 190 216 235 250 250 160 160 160 160 160 160 160 160 160 16	20 20(T) 30 30(CC) 30(CC) 30 30 30(CC) 30(CC) 20 30 30 30(CC) 30(CC) 20 40 30 30 30(CC) 20 40 30 30 30(CC) 20 40 30 30 30(CC) 20 40 40 30 30 30 30 30 30 30 30 30 30 30 30 30	7 T8B 8C 9.1 11 12.2 13 15 C19 C19A 23 25 C27 C30  7 15 21 T8.B 0 7 7.1 T6 8D 15 21  T8.B 0 6 8B 1 T2B.1 6 8C 8B.1	LCS180 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525, BT3000, RMS-1825 ETS1525, BT3000, RMS-1825 ETS1525, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1866U2 Classic 5266, 56266, 5666 1986U, 1985U, 1525H, Legend STANLEY FATMAX FMC660B-VJ STAYER
DEWALT DCS571N-XJ DCS571N-XJ DW936 DW936 DW9351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560 DCS570N DCS361M, DCS365N DC300KL DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS577 (UK) DW65, DW365, DWE575K, DWE576K DCS575 DCS7485 DW700, 701, 707, 777, 770, 773, 774 DW988 DW704, 743, 710, 744, 745, 746, DWE7491, DWE7492 DCS577N, 778N DW250, 1251, 1501, 710, 1751/3, 720, 778, 717XPS DW709 DW704, 705, 8001/3, 8101/3, 721 DW24700 DW704, 705, 8001/3, 8101/3, 721 DW24700 DW3151 SAWKINIG, DZ7400 DW3151 SAWKINIG, DZ7400 DW3151 SAWKINIG, DZ7400 DW3161/3, 728, 729 DRAPER CCS1540 CS1543 PS1200D CS184, PT185 SMS210A, MS210B BTS250 BRS250A CS315A, CTS12 EINHELL Mini Saw BHS55	115 150 150 150 150 150 150 150 150 165 165 165 165 165 165 165 165 165 165	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 4 (T) 30 30 30(T) 30(T) 30(T) 30(CC)	T2B 5 18A 8B.1 18B 112 112.4 CT12.3 112.5 113.1 15 115.1 115.1 115.1 23 24 25 CT25A C25 28 C29 C29 C30 CT30.2 31 C32 31 C32 T2C 5 8B.1 12 C18 12 C18 M3 7	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB IBCS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSP5S, KSS400 MSS5 MT5CC, MT55.18MBC ERIIKA6EE MKSFS, KSS40 MSS5 MT5CC, MT55.18MBC ERIIKA6E ERIIKA6E ERIIKA6E MSS5 SS5, KSS50C, MT55.18MBC ERIIKA6E SS5012 S600NB SS5012 S600NB SS5012 S600NB SS5012 S600NB SS6102, BSS6102, 610FFE, 6112, DHS630FFE, 5604R, HS6601 DSS6102, BSS6102, DHS660Z, 6612U, 680ZJ SR1800, 5801B	160 165 165 165 170 180 180 190 216 225 250 255 305 160 160 162 160 162 162 163 164 165 165 165 165 165	20 20(T) 30 30(T) 16 30 30(T) 16 30 30(T)	7 T8B 8C T8C 9.1 11 112.2 13 15 51 51 51 521 7 7 15 21 T8.B 0 7 7 7.1 16 8D 15 21 31 25 8B.1 8C 8B.1 T8B	LCS180 W5502 CW-1801/165 W6502 W6402C W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55 PL55 PL55 PL55 PL55 PL55 PL5
DEWALT           DCS571N-XJ           DW936           DW351           DW0520K           DC390, DWE007, DCS391, DCS391N           DW62, DWE560           CCS570N           DCS361M, DCS365N           DCS577 (USA)           DCS577 (USA)           DCS577 (USA)           DCS575           DCS7485           DW700, 701, 707, 777, 770, 773, 774           DW383           DW742, 743, 710, 744, 745, 746,           DWE7491, DWE7492           DCS577N, 778N           DW20, 1251, 1501, 710, 1751/3, 720, 778, 717XPS           DW704         705, 8001/3, 8101/3, 721           DW24700           D27105, DWS780, DWS780XPS           DHS5780           DW3151 SAWKING, D27400           DW610/3, 728, 729           DRAPER           CCS1540           CS154           CS154           CS154           CS154           CS154           CS154           CS315A, CTS12           EINHELL           Minl Saw           BHS65           BHS66	115 136 150 165 165 165 165 165 165 165 165 165 165	9.5 10 20 10(T) 20 (P) 20(P) 20(T) 16 16 16(CC)(T) 30 30(T) 30(T) 30(CC) 30 30(CC)	T2B 5 18A 8B.1 18B 112 112 112.4 CT12.3 112.5 113.1 15 1715.1 1715.1 1715.1 23 24 25 CT25A C25 28 C29 C29 C30 C730.2 31 C32 T2C 5 8B.1 12 C18 12 C18 12 C18 13 C25 C25 31 C32 T12 C18 14 C32 C5 C730.2 C730	CGDA, FCGSSA C18DBAL, C3606DA-36V CGU C18DM PSUG C7CTU, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH H012HER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MKS55 MT55CC, MT55.18MBC ERIKA85E TFK85 ERIKA85E TFK85 ERIKA85E MKITA HS301 BSS5012 B6000R S9-6000K, SP6000K1, BSS6102, 610RFE, 6112, DHS630RFE, 5604R, HS6601 DSS6102, BSS610Z, DHS660Z, 6617U, 680ZJ SR1800, 5801B DLS713	160 165 165 165 165 170 180 184 190 216 235 250 230 230 160 160 160 162 190 230 305 165 165 166 160 166 166 166 166 166 166 166 166	20 20(T) 30 30 30 30 30 30 30 30 30 30 30 30 30	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 15 15 15 15 15 15 15 15 15	LCS180 W5502 W5602 W6602 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1409H, 14109H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1868U2 Classic 5266, 56266, 5866 1986U, 1985U, 1525H, Legend STAYLEY FATMAX FMC660B-XJ STAYLER SLL251, SC271, SCE1600 SC250, SLL250, SC270 SCU75
DEWALT DCS571N-XJ DCS571N-XJ DW936 DW351 DW007 DWS520K DC390, DWE007, DCS391, DCS391N DW62, DWE560 DCS570N DCS361M, DCS365N DC300KL DC5577 (USA) DCS577 (USA) DCS577 (USA) DW65, DW365, DWE575K, DWE576K DCS575 DCS7485 DW700, 701, 707, 777, 770, 773, 774 DW383 DW86 DW742, 743, 710, 744, 745, 746, DWE7491, DW55, 8001/3, 8101/3, 721 DW24700 DZ7105, DWS780, DWS780, DWS780XPS DHS5780 DW3151 SAWKING, DZ7400 DW1601/3, 728, 729 DRAPER CCS1540 CS154, PT185 SMS210A, MS210B BTS250 BZ751 SMS250A CS315A, CTS12 EINHELL Mini Saw BHS555 BHS666 BT-SM2131	115 136 150 165 165 165 165 165 165 165 165 165 165	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) 4 (58"(T) 30 30(T) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 C25 C725 28 C29 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C3FC, C3FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 118, 2120 JCB 118, 2120 JCB 118, C3FS KSPSS, KSS330, KST55 KSPSS, KSS35, KSS330, KST55 KSPSS, KSSSS, KSSS30, KST55 KSPSSS, KSSSS, KSSS30, KST55 KSPSSSSS, KSSSS, KSSS30, KST55 KSPSSSS, KSSSS, KSSS30, KST55 KSPSSS, KSSSS, KSSS30, KST55 KSPSSS, KSSSS, KSSS30, KST55 KSPSSS, KSSSS, KSSS30, KST55 KSPSSS, KSSSS, KSSSS, KSSSS30, KST55 KSPSSS, KSSSS, KSSSS30, KST55 KSPSSS, KSSSS, KSSSSS,	160 165 165 165 170 180 180 190 216 225 250 255 305 160 160 162 160 162 162 163 164 165 165 165 165 165	20 20(T) 30 30(T) 16 30 30(T) 16 30 30(T)	7 T8B 8C T8C 9.1 11 112.2 13 15 51 51 51 521 7 7 15 21 T8.B 0 7 7 7.1 16 8D 15 21 31 25 8B.1 8C 8B.1 T8B	LCS180 W5502 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MSS8DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1866U2 Classic S266, 56266, 5666 1986U, 1985U, 1525H, Legend STANLEY FATMAX FMC6600E-XJ STAYPER SLL251, SC271, SCE1600 SC250, SLL250, SC270 SCU75 TITAN
DEWALT  DCS577IN-XJ  DCS571N-XJ  DW936  DW351  DW007  DWS520K  DC390, DWE007, DCS391, DCS391N  DW62, DWE560  DCS570N  DCS361M, DCS365N  DCS361M, DCS365N  DCS97(USA)  DCS577 (UK)  DW65, DW365, DWE575K, DWE576K  DCS577  DCS7485  DW700, 701, 707, 777, 770, 773, 774  DW883  DW86  DW742, 743, 710, 744, 745, 746,  DWE7491, DWE7492  DCS577N, 778N  DW250, 1251, 1501, 710, 1751/3, 720, 778, 717XPS  DW700  DW704, 705, 8001/3, 8101/3, 721  DW24700  D27105, DWS780, DWS780XPS  DHS5780  DW3151 SAWKING, D27400  DW1601/3, 728, 729  DRAPER  CCS1540  CS1543  CS153  PS1200D  CS184, PT185  SMS210A, MS210B  BTS250  82751  SMS210A, CTS12  EINHELL  Mini Saw  BHS55  BHS66  BT-SM2131, TH-MS2112	115 136 150 165 165 165 165 184 184 184 190 210 2210 2210 2250 235 240 250 250 300 305 315 350 165 165 184 210 2210 235 240 250 250 250 250 250 250 250 250 250 25	9.5 10 20 10(T) 20 (P) 20 (P) 20 (P) 20 (P) 20 (T) 16 16 16(CC)(T) 30 30 30(T) 30(T) 30(T) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T15.1 T15.1 T15.1 T15.1 T15.2 23 24 25 CT25A C25 28 C29 C29 C29 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18 A A A A A A A A A A A A A A A A A A A	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB IBCS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MSS5 MT5CC, MT55.18MBC ERIIKA80E MKS15, SS55, KSS6F KSPSF, KSS400 MSS5 MT5CC, MT55.18MBC ERIIKA85E MAKITA HS301 BSSS5012 5600NB 5603R, 5604R, 5621DWB SSP-6000K, SP6000K1, BSS6102, 610FFE, 6112, DHS630FFE, 5604R, HS6601 DSS610Z, BSS610Z, DHS660Z, 6612U, 680ZJ SR1800, 5801B DLS713 BSR730, DHS7102J 5703R, 5017R, 5704R, 5017RKB, H57100,	160 165 165 165 165 170 180 180 190 216 235 250 235 250 230 235 160 160 160 160 160 162 190 230 315 315 315 315 315 315 315 315 315 315	20 20(T) 30 30(CC) 30(C	7 T8B 8C T8C 9.1 11 112.2 13 15 51 55 C19 C19A 23 25 C27 C30 7 T5 21 T8.B 0 7 7.1 T6 8D 15 21 31 31 31 55 88 M3.1 T2B.1 6 8C 8B.1 T8B	LCS100 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55 PL55 PL55 PS2500, KS250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1868U, 1985U, 1525H, Legend STAILEY FATMAX FMC660B-XJ STAYLER SLL251, SC271, SCE1600 SC250, SLL250, SC270 SCU75 TITAN
DEWALT	115 136 150 165 165 165 165 165 165 165 165 165 165	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T) 4 (58"(T) 30 30(T) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 15 T15.1 T18.1 C19 23 24 C25 C725 28 C29 C30 CT30.2 31 C32 T2C 5 8B.1 12 C18	CaDA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PBU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, C3U C10FA, C10FB, C10FCA C10FCA C12FCH, C12RSH H012HER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB 18CS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MKS55 MT55CC, MT55.18MBC ERIKA85E TFK85 ERIKA85E TFK85 ERIKA85E MKITA HS301 BSS5012 B6000R S9-6000K, SP6000K1, BSS6102, 610RFE, 6112, DHS630RFE, 5604R, HS6601 DSS6102, BSS610Z, DHS660Z, 6617U, 680ZJ SR1800, 5801B DLS713 BSR730, DHS7102J S703R, 5017R, 5704R, 5017RKB, H57100, H576013, H576113, T601, 7100, MS802	160 165 165 165 165 170 180 184 190 190 216 235 250 230 230 165 165 165 162 190 230 315 250 85 166 169 169 169 169 169 169 169 169 169	20 20(T) 30 30(T) 16 30 30 30(T) 16 30 30 30(T)	7 T8B 8C 9.1 11 12.2 13 15 15 15 15 15 15 15 15 15 15 15 15 15	LCS180 W5502 W5602 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS305RG SCHEPPACH WOODSTER PL55 PL55-P2 PL75 MS88DB KG250, TKG250/E TS2500, KSE250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1868U2 Classic 5266, 56266, 5866 1986U, 1985U, 1525H, Legend STAYLEY FATIMAX FMC660EAJ, SCZ71, SCE1600 SCZ50, SLL250, SCZ70 SCU75 TITAN TTB689CSW TTB673CSW
DEWALT  DCS571N-XJ  DCS571N-XJ  DW936  DW936  DW9351  DW007  DWS520K  DC390, DWE007, DCS391, DCS391N  DW62, DWE560  DCS570N  DCS361M, DCS365N  DC300KL  DCS577 (UK)  DW85, DW365, DWE575K, DWE576K  DCS575  DCS7485  DW700, 701, 707, 777, 770, 773, 774  DW842, 743, 710, 744, 745, 746, DWE7491, DWE7492  DCS577N, 778N  DW250, 1251, 1501, 710, 1751/3, 720, 778, 717XPS  DW700  D27105, DWS780, DWS780XPS  DW3151 SAWKING, D27400  DW1601/3, 728, 729  DWAPER DEWALT SAWKING, D27400  DW1601/3, 728, 729  DRAPER DEWALT SAWKING, D27400  DW1601/3, 728, 729  DW2501, DW2501	115 136 150 165 165 165 165 164 184 184 184 184 189 190 210 216 235 250 260 305 315 138 150 250 315 165 160 250 250 250 250 260 260 260 260 260 260 260 260 260 26	9.5 10 20 10(T) 20 (P) 20(T) 16 16 16(CC)(T) 20(T)  ◆ 5.8"(T)  ◆ 5.8"(T)  ◆ 5.8"(T) 30 30(T) 30(CC)	T2B 5 18A 8B.1 T8B 12 T12.4 CT12.3 T12.1 T12.5 T13.1 T15.1 T18.1 C18 C25 C29 C30 CT30.2 31 C32 T2C 5 8B.1 T2C T2C 5 8B.1 T2C T3C T3C T3C T3C T3C T3C T3C T3C T3C T3	C8DA, FC65SA C18DBAL, C3606DA-36V C6U C18DM PSU6 7C7U, C7U, C7BU C7SB3 PSU7 FC7SA PSM7, C7U3 C8FSE C8FC, C8FS PSU9, G9U C10FA, C10FB, C10FCA C10FCA C10FCA C10FCA C12FCH, C12RSH HOLZHER 2103, 2104, 2105, 2106 2117, 2119 2118, 2120 JCB IBCS-B 18V MAFELL KSS40 MKS55, SS55, KSS330, KST55 KSPSS, KSS400 MSS5 MT5CC, MT55.18MBC ERIIKA80E MKS15, SS55, KSS6F KSPSF, KSS400 MSS5 MT5CC, MT55.18MBC ERIIKA85E MAKITA HS301 BSSS5012 5600NB 5603R, 5604R, 5621DWB SSP-6000K, SP6000K1, BSS6102, 610FFE, 6112, DHS630FFE, 5604R, HS6601 DSS610Z, BSS610Z, DHS660Z, 6612U, 680ZJ SR1800, 5801B DLS713 BSR730, DHS7102J 5703R, 5017R, 5704R, 5017RKB, H57100,	160 165 165 165 165 170 180 180 190 216 235 250 235 250 230 235 160 160 160 160 160 162 190 230 315 315 315 315 315 315 315 315 315 315	20 20(T) 30 30(CC) 30(C	7 T8B 8C T8C 9.1 11 112.2 13 15 51 55 C19 C19A 23 25 C27 C30 7 T5 21 T8.B 0 7 7.1 T6 8D 15 21 31 31 31 55 88 M3.1 T2B.1 6 8C 8B.1 T8B	LCS100 W5502 CW-1801/165 W6502 W6602 W6602 W6610, 6613, 6615, RCS1400G EWS1266, EWS1366 CMS1801 EMS216L TS221 20W8402C ETS1525, BT3000, RMS-1825 ETS15252, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825 TSS-305, EMS30SRG SCHEPPACH WOODSTER PL55 PL55 PL55 PL55 PS2500, KS250, HS100S TS4000 (pre 1989) HM120L TK, TKH, TKU, TS4000 (post 1989) SEDGWICK TA315 SKIL Mini 1800, 1850H, 1850HM 1408H, 1409H, 1410H 1855, 416H, 1522, 1410, 1854 5740, 5590 1868U, 1985U, 1525H, Legend STAILEY FATMAX FMC660B-XJ STAYLER SLL251, SC271, SCE1600 SC250, SLL250, SC270 SCU75 TITAN

(CC) = Radial arm or mitre saw (zero or negative hook angle).

\* = Will require a suitable bushing washer made to machine manufacturers specification.

(P) = Plunge saw.

(T) = Thin body blade required for cordless saws.

All dimensions in mm unless otherwise stated. Please note some flip over bench saws are also mitre saws.

Information taken from manufacturers catalogue and website is deemed correct at time of printing. If in doubt about size and bore, please refer to your saw machine manual for the exact specification.

CD0000 F000DD	210	30(00)	019
SR2300, 5900BR 5903R	235	25* 30	23
5903H LS1013	255	30(CC)	C27
MLS100	255	30(CC)	C27.
LS1030	260	25.4(CC)*	C28
LS1018L, 1040/2, 1018L, 1019	260	30(CC)	C28
LS1016	260	30(CC)	C28.
2704 LS1040, LF1000	260 260	30 30(CC)	28.3 C28
LS1214, LS1216, LH1040, LS1219, 1216	305	30(CC)	C30
METABO	505	55(55)	000
KS0852S, KS08255	150	20	5
KS55FS	160	20	7
KSA18, KS18LTX57	165	20(T)	T8B
KS1468S, KS1266S	190	20*	15
KS66, KSE68, KSP65 KSE1678, KGSE1670	190 210	30 16*(CC)	15 C18
KGS255	210	30(CC)	C18
KGS216M, KS216M	216	30(CC)	C19
KS6323S, KS1785S	240	30	24
KGS303	250	30(CC)	C25
KGS254 KS305M	254 305	30(CC) 30(CC)	CT26
TKH315C	315	30(00)	31
MILWAUKEE			
M18CCS55, BLCS66, FCS66, CCS66	190	30(T)	T15.
MS216SB	216	30(CC)	C19
MS305DB	305	30(CC)	C30
NUTOOL NPT714-2	184	16	12
PARKSIDE	104	10	12
Mini	85	10	МЗ
PERLES			
KS50	150	20	5
KS70	210	30	18
PEUGEOT SC53C, TC3009	150	20	5
SC66E, 66C	184	16	<u>5</u> 12
TC3017	190	30	15
TC3014	200	30	16
REXON	<u></u>	=15:5-:	
MS-10RA	250	5/8(CC)*	-
BTS-10A M2501A	250 255	5/8* 30(CC)	C27
RYOBI	200	55(55)	ŲΔI
CS1201	85	15	M3.1
W5002	150	16*	5
CCS18011/LM	150	10*	-
CW-1801/150 LCS180	150 150	20 10	5
W5502	160	20	7
CW-1801/165	165	30	8C
W6502	180	30	11
W6402C	184	16	12
W6610, 6613, 6615, RCS1400G	190	30	15 13
EWS1266, EWS1366 CMS1801	190 210	16 30	13
EMS216L	216	30(CC)	C19
TS221	220	25.4*(CC)	C19
20W8402C	235	16*	23
ETS1525, BT3000, RMS-1825	250	30	25
ETS1525C, ETS1825, ETS1526AL EMS254L, EMS1426LHG, ETMS1825	254 254	30 30(CC)	26 CT26
TSS-305, EMS305RG	305	30(00)	30
SCHEPPACH			
WOODSTER	160	20*	7
PL55	160	20	7.1
PL55-P2 PL75	160	20(P)	7.2 18
MSS8DB	210	30 30(CC)	C18
KG250, TKG250/E	250	20(CC)*	C25
TS2500, KSE250, HS100S	250	30	25
TS4000 (pre 1989)	300	30	29
HM120L	305	30(CC)	C30
TK, TKH, TKU, TS4000 (post 1989)	315	30	31
TA315	315	30	31
SKIL	310	-	91
Mini	85	10	МЗ
1800, 1850H, 1850HM	150	20	5
1408H, 1409H, 1410H	165	16*	8C
1855, 416H, 1522, 1410, 1854 5740, 5590	165 180	20 16*	8B 11
1866U2 Classic	184	16	12
5266, 56266, 5866	190	16*	13
1986U, 1985U, 1525H, Legend	235	30	23
STANLEY FATMAX			
FMC660B-XJ	165	20(T)	T8B
SLL251, SC271, SCE1600	250	20	O.F.
SC250, SLL250, SC270	250 250	30 30(CC)	25 C25
SCU75	250	20*	25
TITAN			
TTB689CSW	85	10	M3
TTB673CSW	165	20(P)	8B.2
TRITON TTS1400	105	20/E)	0D 4
TTS1400 TA184CSL	165 184	20(P) 20	8B.1 12.1
TA235CSL	235	30	23
WORKZONE	0.5	10	M3
Mini Saw	85		
	85	15	M3.1

Bore 30(T) 20\*

T15.1 18A

190

### POWER TOOLS, SAFETY & TABLES









### **POWER TOOLS**

T11 WORKSHOP ROUTER	122
T10 TRADESMAN ROUTER	123
T7 ROUTER	124
T5 ROUTER	125
T4 ROUTER	126
T35 VACUUM EXTRACTOR	127
T32 VACUUM EXTRACTOR	128
T31 VACUUM EXTRACTOR	129

### SAFETY

AIRPRO MAX RESPIRATOR	132
AIRSHIELD PRO RESPIRATOR	133
AIR MASK PRO FULL FACE MASK	134
AIR STEALTH VIS HALF MASK	135
AIR STEALTH P3 HALF MASK	136
AIR STEALTH LITE PRO	137
SAFETY SPECTACLES	137

### **ROUTER TABLES**

PRO ROUTER TABLE	138
WORKSHOP ROUTER TABLE	139
CRAFTPRO ROUTER TABLE MK3	140















VIDEO



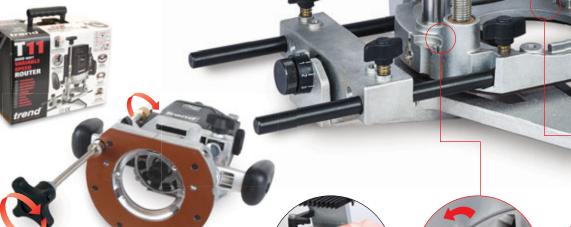
80mm plunge



With built-in Quick Raiser fine height adjuster. Same features as T10 opposite but also has:

- Router fine height adjuster for above and below height adjustment. One revolution of handle equals 1.5mm.
- conjunction with optional Quick Release Kit.

Three quick release recesses in base to fit tables in Fitting for optional Clamp Guide System Kit. Extra large base aperture for large cutters. Quick release dust spout. T11EK (230v) £399.64 or T11ELK (115v) £411.63





Height adjustment from either end.

Standard guide bush fitting.

Inner plate centring for superior accuracy.

75mm aperture for large cutters in table mode.

With 90mm recess to house panel raisers.



Built-in Quick Raiser for table fine height adjustment



Enables quick fitting and removal of router to PRT, router tables and jigs when used with optional Quick Release Kit. EC Design Reg. No. 000336763.

75mm aperture for large cutter in table mode.

trend

Clamp guide fitting to suit VJS clamp guides

INCLUDES: 1 x 1/2" Collet 1 x Fine height adjuster 1 x Guide bush 30mm with inner plate and line-up pin 1 x Clip-in dust spout 35mm 1 x Side-fence with micro 1 x Storage case

SPECIFICATION	l:	
Rating		Professional / Trade
Plunge stroke		0-80mm
Power input		2000w
Standard collet dia.		1/2"
No load speeds		8-20000 rpm
Dust spout size (ID	)	35mm
Guide bush dia. su	pplied	30mm
Cutter dia. max. plu	ınge/table	70/86mm
Other collet dia.	3mm, 6mm	n, 1/4", 8mm, 3/8", 10mm and 12mm
Weight		6.3kg
Voltages		230v or 115v*
		75

\*All 115v routers over 1850W require a 32A BS4343 115v plug.Minimum generator or transformer requirement 3 kVA continuous with a 32A BS4343 115v socket outlet. 115v units cannot be used on the no-volt release switch CRT/MK3L and PRT/L router tables.

	Product Ref.	Price
bolts & fixings	T11/JT/KIT	£30.56
Varijig clamp guide system kits     Comprising: alloy bracket fixing & plastic slider.     Allows T11 to join to Varijig Clamp Guides.		
	WP-T11/087	£68.16
50mm 70mm	GB500 + GB700 +	£15.56 £15.56
5. <b>Plug 115v 32A</b> 32A BS4343 115 volt plug		£43.10
	s A plastic slider. np Guides.  50mm 70mm	bolts & fixings



# 2000 WATT



**VARIABLE** SPEED TRADESMAN ROUTER

Ideal for use by tradesmen in the workshop or on-site, especially for cutting worktops.

- Electronic full wave variable control of spindle speed under load for a fine finish on all types of material.
- Soft start eliminates sudden movement of machine on start-up.
- Two column precision base with large phosphor bronze bushes for plunging accuracy.
- Spindle lock and hex collet nut results in easy cutter changes with the 22mm spanner supplied.
- Adjustable twin rod parallel side-fence guide with integral micro-adjuster for straight edge work.
- Precision machined one-piece multi-slit collet for fail-safe grip of cutter shank.
- 3 position revolving depth stop for fast adjustable settings.
- Adjustable inner plate for guide bush accuracy.

**T10EK** (230v) £357.41 or T10ELK (115v) £357.41





T10 UNIQUE FEATURE IDEAL FOR ROUTING KITCHEN





trend

Adjustable inner plate centring for superior accuracy

#### **INCLUDES:**

I X I/2 Collet
1 x Guide bush 30mm with inner
plate and line-up pin
1 x Bolt-on dust spout 35mm
1 x Side-fence with micro adjuster

1 x Storage case



#### SPECIFICATION:

Rating	Professional / Trade
Plunge stroke	0-80mm
Power input	2000w
Standard collet dia	a. 1/2"
No load speeds	8-20000 rpm
Dust spout size (II	O) 35mm
Guide bush dia. su	upplied 30mm
Cutter dia. max.	50mm
	8mm, 6mm, 1/4", 3/8", 8mm, 10mm & 12mm
Weight	6.3kg
Voltages	230v or 115v*

\*All 115v routers over 1850W require a 32A BS4343 115v plug. Minimum generator or transformer requirement 3 kVA continuous with a 32A BS4343

### ACCESSORY GUIDE BUSHES

From 10mm to 40mm see page 191 for full details.

Product Ref. **GB** group



#### T10 & T11 ACCESSORIES: Product Ref. Price 12. Guide bush 30mm x 10mm spigot **GB30/A** £9.80 13. Collets precision slit one-piece sizes: 1/4" CLT/T10/635 £30.56 8mm CLT/T10/8 £30.56 12mm CLT/T10/12 £30.56 1/2" CLT/T10/127 £30.56 BEAM/002 14. Beam trammel 10mm x 500mm rod £28.58 15. Standard fence rods 360mm (pair) ROD/10X360 £20.90 16. Extra long fence rods 500mm (pair) ROD/10X500 £28.58 17. Plug 115v 32A 32A BS4343 115 volt plug PLUG/110V/32A £43.10 18. Socket 115v 32A 32A BS4343 115 volt plug SOCK/110V/32A

T10 ACCESSORIES:	Product Ref.	Price
<ol> <li>Fine height adjuster FHA/003 £28.56</li> <li>Fits in place of the knurled knob and provides fine height adjustment of the cutter in a table or with a dovetail jig.</li> </ol>		
20. Extra side-fence	WP-T10/087	£75.40
21. Direct fit guide bushes 30mm	GB/T10/30	£19.46



Micro adjustable

side-fence.







Built in fine height adjuster

8 stage turret and plunge post

### INCLUDES: 1 x 1/2" Collet 1 x 1/4" (6.35mm) Reducing Sleeve 1 x 30mm Guide bush 1 x 35mm Clip-in dust spout 1 x Side-fence with micro adjuster 1 x Pivot pin 1 x Storage case



SPECIFICATION:	
Rating	Trade
Plunge stroke	0-50mm
Power input	2100w
Standard collet dia.	1/2"
Cutter dia. max.	40mm
No load speeds	8000-20000 rpm
Dust spout size (ID)	35mm
Guide bush dia.	30mm
Weight	4.3kg
Voltage	230v

T7 ACCESSORIES:	Product Ref.	Price
1. Guide bush 30mm	GB/T7/30	£9.14
2. Collets & Reduction sleeve 1/4" Sleeve	CLT/SLV/63127	£30.56
8mm Collet + Nut Set	CLT/T7/8	£30.56
1/2" Collet + Nut Set	CLT/T7/127	£30.56
3 . Side-fence	WP-T7/121	£41.58







# **T5v2**



trena

1000 WATT VARIABLE SPEED ROUT

A popular design, this router is both compact, powerful and suitable for light and medium duty applications.

Electronic variable control of spindle speed under load for a fine finish on all types of material.

Spindle lock and hex collet nut allows easy cutter changes.

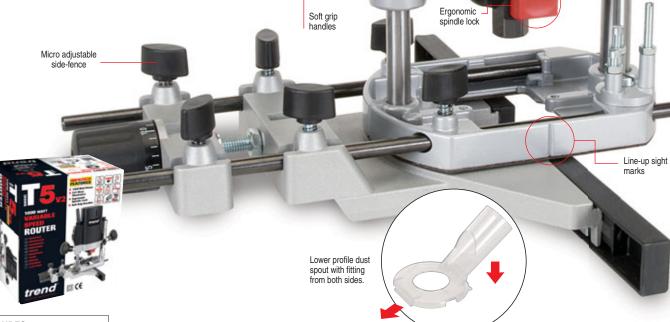
Soft-start feature eliminates sudden movement of machine

Precision machined one piece multi-slit collet with combined nut.

Compact design and low weight make it easy to use especially for intricate work.

Adjustable twin rod side-fence for guiding along a straight edge.

**T5EB** (240v) £199.00 or **T5ELB** (115v) £199.00



Product Ref.

Price

### **INCLUDES:**

- 1 x 1/4" (6.35mm) Collet
- 1 x 35mm Clip-in dust spout
- 1 x 20mm Guide bush
- 1 x Side-fence with micro adjuster
- 1 x Beam trammel attachment



### SPECIFICATION:

SPECIFICATION:	
Rating	Professional / Trade
Plunge stroke	0-50mm
Power input	1000w
Standard collet dia.	1/4" & 8mm
Cutter dia. max.	40mm
No load speeds	9-27000 rpm
Dust spout size (ID)	35mm
Guide bush dia.	20mm
Weight	3.3kg
Voltages	240v or 115v*

<sup>\*</sup> For 115V minimum generator or transformer requirement 2.75kVA continuous.

### **T5 ACCESSORIES:**

Fine height adjuster Fits in place of the depth stop and threads onto the longest revolving turret screw. Provides fine height adjustment in a router table or with dovetail jigs. £16.67

ter. From 10mm to 40mn	n.
GB10, GB12, GB14	£9.14
BEAM/001	£19.46
WP-T5/046	£41.58
WP-T5/077	£23.69
ROD/8X300	£13.91
ROD/8X500	£22.23
	BEAM/001 WP-T5/046 WP-T5/077 ROD/8X300



### T5 REPLACEMENT PARTS:

The T5 router is supported by our network of repair agents around the UK. A complete range of spares are available. Common spares listed below.

Beam trammel attachment

10	Collet & nut sets (new sty		
9.	Guide bush 20mm	GB20	£9.14
	For 8mm dia. tence rods.	BEAM/005	£8.35

6. & 7.

Multi-slit one-piece collet with combined nut sets in 3 sizes. ID 1/4" CNS/T5/635 £20.60 ID 8mm CNS/T5/8 £20.60







**T4** 850 WATT

### **VARIABLE** SPEED ROUTER

Easy carbon

Removable base

Spindle lock

Tapped guide bush fixing holes.

Versatile Entry Level plunge router.


- · Variable speed control.
- · Spindle lock.
- · Hex collet nut allows easy cutter changes.
- Removable base for carving and die grinding with 43mm diameter collar for pillar drill fitment.
- Tapped fixing holes for Trend standard guide bushes.
- Separate dust spout fixing holes.
- · Adjustable twin rod side-fence for guiding along a straight edge.

**T4EK** (240v) £112.27 or **T4ELK** (115v) £112.27





3 position turret stop.





Edge moulding



### INCLUDES.

INCLUDES:
1 x 1/4" Collet
1 x 6mm Collet
1 x 8mm Collet
1 x 34mm Bolt-on dust spout
1 x 16mm Guide bush
1 x Side-fence



#### CDECIFICATION.

SPECIFICATION:	
Rating	Entry Trade
Plunge stroke	0-35mm
Power input	850w
Standard collet dia.	1/4", 6mm & 8mm
Dust spout size (ID)	34mm
Guide bush dia.	16mm
No load speeds	11,500 - 32,000 rpm
Cutter dia. max.	30mm
Weight	2.8kg
Voltage	230v or 115v


For 115V minimum generator or transformer requirement 2.75kVA

#### T4 ACCESSORIES: Product Ref. Price 1. Fine height adjuster

Fits in place of the depth stop and threads onto
the longest revolving turret screw. It provides a
fine height adjustment of the cutter in a router
table or with a dovetail jig.

		FHA/009	£15.22	
2.	Guide bushes	GB10, GB12, GB	14 £9.14	
	Alternative guide bushes to fit base of router.			
	From 10mm to 40m	ım.		
	See page 183 for complete range.			
_	Boom trammal	DEAM/004	C10.46	

	Product Ref.	Price
4. Extra long fence rods 500mm (pair)	ROD/8X500	£22.23
5. Side-fence Complete with rods	WP-T4/087	£11.81
6. Replacement one piece collets		
- ID 3mm	CLT/T3/3 +	£5.15
ID 6mm	CLT/T4/6 +	£5.15
ID 1/4"	CLT/T4/635	£5.30
ID 8mm	CLT/T4/8	£5.30





Large rear castors fo extra stability









trend

WET & DRY MEDIUM DUTY

### **VACUUM EXTRACTOR**

Professional wet & dry Class M dust extractor with power tool take off for workshop, trade and professional use.

HEPA cartridge filter with nylon pre-filter for dust with workplace limit values ≥ 0.1 mg/m<sup>3</sup>.\*

Automatic power tool socket, with run on, which allows the user to plug in a power tool and run it directly off the unit.

27 litre capacity impact resistant plastic container with castors.

Extra long 5 metre x 39mm outside diameter flexible hose for long reach.

Extra long 7 metre power cable.

Includes micro filter bag, floor cleaning kit, crevice tool, upholstery tool, power tool adaptor and round brush.

**T35A** (230v, 1400W) £370.25 **T35AL** (115v, 800W) £413.75







Auto-start maximum 2200W (240v) 1000W (115v)



Auto filter shaker and blockage warning light.



1 x 5 metre hose

1 x HEPA cartridge filter

1 x Micro filter bag

1 x Floor cleaning kit for floors, carpets & fluids

1 x Crevice tool

1 x Upholstery spout

1 x Power tool adaptor

1 x Round brush



SPECIFICATION:

SPECIFICATION:	
Rating	Trade/Professional
Dust category *	M
Power input T35A	240v 1400w
Power input T35AL	115v 800w
Auto-start max./min.	240v 2200w/50w
Auto-start max./min.	115v 1000w/50w
Airflow	4,200 L/min
Vacuum max.	270 mbar
Noise	75 dB
Hose	5M x 39mm OD
Hose spout	35mm OD
Container volume (dry/wet)	27L/16L
Dimensions	350 x 390 x 610mm
Weight	7.5kg
Voltage	230v / 115v



CRT & PRT tables. Ref. CRT/3



Easy filter removal plus additional foam filter for sucking up water.



Easy fit bag with full bag closure system.

ACCESSORIES:	Product Ref.	Price
1. Micro filter bags		
Micro filter bags improve pe	rformance	
& allow for easier waste disp	oosal.	
1 off	T35/1	£5.53
5 off	T35/1/5	£24.95
10 off	T35/1/10	£48.50
2. Round brush	T31/3	£6.98
3. Hose adaptor	CRT/3	£12.59
Allows standard hose to be	used	
with a CRT, WRT or PRT ro	uter table.	
4. Deluxe Floor Kit	T35/3	£32.67

Metal tubes and universal spout with plastic wheels. Vacuum cleaners of dust category to EN60335-2-69 for dry vacuuming of materials of exposure limit volume ≥ 0.1 mg/m3 that are hazardous to ones health.

R	EPLACEMENT PARTS:	Product Ref.	Price
5.	HEPA 0.3 microns cartridge filter for increased	d	
	effectiveness against fine dust particles.	T35/2	£31.69
6.	Polyurethane foam filter	T35/4	£10.83
7.	Air outlet filter HEPA	T35/5	£23.94
8.	Carbon filter	T35/6	£3.55



## **T32**







Filter shaker button to clean the filter

800W M CLASS 20 LITRE LIGHT DUTY

**VACUUM CLEANER** Light duty Professional M Class dust extractor

for site, workshop and trade use.

HEPA filter system with 99.9% efficiency, collects particulates without causing fire hazard and features a filter shaker to clean the filter and maintain maximum filter efficiency.

- Ideal for on-site use, the T32 M Class rated dust extractor meets the legal requirement set by HSE.
- 20 litre capacity steel container and 15.3 litre bag capacity with dust full indicator.
- · Base includes wheels/castors for easy manoeuvrability.
- Long 3 metre x 39mm outside diameter flexible hose for long reach and 5 metre long power cable with onboard storage.
- Includes micro filter bag, floor cleaning kit, combined crevice & brush tool and power tool adaptor.

**T32** (230v, 800W) £159.00

T32L (115v, 800W) £159.00



Long hose and power cable.

### **INCLUDES:**


- 1 x 3m flexible hose
- 1 x HEPA filter cartridge
- 1 x Synthetic collection bag
- 1 x High efficiency floor brush
- 1 x Hard floor brush
- 1 x Crevice tool/brush
- 1 x Curved metal tube
- 2 x Metal tube 1 x Dust spout adapto

### SPECIFICATION:

Rating	Trade/Professional
Dust category *	M
Power input	800w
Airflow	4,200 L/min
Vacuum max.	146 mbar
Noise	240v 78 dB
	115v 80 dB
Hose	3M x 39mm OD
Hose spout	35mm OD
Container volume	20L
Dimensions	350 x 390 x 610mm
Weight	5.8kg
Voltage	230v / 115v

Vacuum cleaners of dust category to EN60335-2-69 for dry vacuuming of materials of exposure limit volume ≥ 0.1 mg/m3 that are hazardous to ones health.





Micro filter bags improve performance & allow for easier waste disposal.

ACCESSORIES:	Product Ref.	Price
Micro filter bags		
Micro filter bags improve	performance	
& allow for easier waste of	disposal.	
1 off	T32/1	£4.95
5 off	T32/1/5	£21 95

T32/1/10

F	REPLACEMENT PARTS:	Product Ref.	Price
2.	HEPA 0.3 microns cartridge filter for increased		
	effectiveness against fine dust particles.	T32/2	£29.95

WITH 3M HOSE &

5M POWER CABLE







£35.99

## **T31**





1400 WATT WET & DRY LIGHT DUTY

**VACUUM EXTRACTOR** 

Semi-professional wet & dry Class L dust extractor with power tool take off for hobbyist, DIY and light trade use.

• HEPA cartridge filter with nylon pre-filter for dust with workplace limit values > 1 mg/m3.\*

• Silenced motor rated input 1400 watt (max 1600 watt) 240v.

Automatic power tool socket, with run on, which allows the user to plug in a power tool (max. 2200W, min. 50W) and run it directly off the unit. \*\*

Large 35 litre capacity impact resistant plastic container with castors.

• Extra long 5 metre x 39mm outside diameter flexible hose for long reach.

Extra long 7 metre power cable.

Includes paper bag, floor cleaning kit, crevice tool, upholstery tool, power tool adaptor and no foam filter.

Ideally suited for use in the workshop, garage and for light trade applications.

**T31A** + (230v) £201.88



Power tool take off with extra long hose and power cable.

### INCLUDES:

- 1 x 5 metre hose
- 1 x HEPA filter 1 x Paper bag
- 1 x Floor cleaning kit for floors, carpets & fluids
- 1 x Crevice tool
- 1 x Upholstery spout
- 1 x Power tool adaptor
- 1 x Round brush



SPECIFICATION.	
Rating	Hobbyist / DIY / Light Trade
Dust category *	L
Power input	1400w
Auto-start max./min.**	2200w/50w
Airflow	4,200 L/min
Vacuum max.	270 mbar
Noise	75 dB
Hose	5M x 39mm OD
Hose spout	35mm OD
Container volume (dry/	wet) 35L/22L
Dimensions	350 x 390 x 610mm
Weight	7kg
Voltage	230v

Vacuum cleaners of dust category to EN60335-2-69 for dry vacuuming of materials of exposure limit volume > 1 mg/m3 that are hazardous to ones health. For tools with a worklight/laser please switch off light/laser to


ensure auto-start functions properly


LONG 5M HOSE & 7M POWER CABLE

**WITH EXTRA** 



Floor cleaning kit for wet and dry debris







Micro filter bags improve performance & allow for easier waste disposal.		
1 off	T31/1/A	£6.44
5 off	T31/1/A/5	£29.06
10 off	T31/1/A/10	£56.51


**ACCESSORIES:** 

1. Micro filter bags

Paper bags improve performance & allow for easier waste disposal

1 off	T31/1	£4.65
5 off	T31/1/5	£20.95
10 off	T31/1/10	£40.75
3. Hose adaptor	CRT/3	£12.59

Allows standard hose to be used with a CRT, WRT or PRT router table.





Auto-start maximum 2200W.



Neat cable storage





### RESPIRATORY EQUIPMENT

Whether it's your eyes, face, lungs or head, Trend takes your safety & protection seriously. From daily disposable masks to high-end protective respiratory equipment, Trend has the right mask to suit your needs.



Market Leading **Respiratory Protection** 



**Excellent Filtration** & Breathability



Maximum Comfort



Dust Mask FFP3 R D



Half Mask Respirator P3(R)



**Half Mask Respirator** with Safety Goggles



AIRMASK PRO Full Face Mask



AIRSHIELD PRO Battery Powered Respirator THP2 With purified airflow

WHEN WORKING WITH...



Goggles Required







MASK FOR THE TASK

**CHOOSE THE RIGHT** 







MATERIAL **HAZARDS** 

> Dust & debris could fly into

face & eyes

Glasses Glasses Required Required







Protection

Required





Debris, failed cutting blades & discs. Lots of silica dust & hot debris

Light dust



Goggles Required



Protection

Required



Protection

Required

A2P3 Filter

Required







Protection

Heavy dust & small debris



SUITABLE FOR FACIAL HAIR

FILTER PROTECTION RATING

**EAR PROTECTION** HARD HAT PROTECTION

paint for too long can cause dizziness & nausea

> P3 / A2P3 FFP3 TH<sub>2</sub>P

TH3P Accessory Sold Accessory Sold Separately Separately

If you are unsure or require further information regarding masks, filters and equipment please refer to the HSE Respiratory Protective Equipment at Work Guide on the Health and Safety website www.hse.gov.uk



# With purified airflow & intergrated hard hat



Dust Mask FFP3 R D

Lightweight dust mask with disposable filters



High
Filtration



Disposable Filters

Product Ref.

1 Complete Mask Assembly



- 5 Pack includes: 1 Complete Mask Assembly + 4 Filtering Face Pieces



### **AIRSTEALTH**

Half Mask Respirator P3(R)

P3R half mask, with low profile ergonomic design



Maximum Filtration



Maximum Comfort

Product Ref.



Replacable twin HEPAG® P3 Filters

APF20

Product Ref. STEALTH/1

Replacable twin HEPAG<sup>o</sup>
P3 Nuisance Filters

Product Ref.



AIRSTEALTH VIS

Half Mask with safety Goggles

Half mask with visor for protection against high speed particles.



Maximum Filtration



Maximum Comfort


Product Ref.



Replacable twin HEPAG®
P3 Filters

APF20

Product Ref. STEALTH/1



APF20

Product Ref.



### AIRMASK PRO

Full Face Mask

Industrial Rated Low Profile Lightweight full face mask.



**Maximum Breathability** 



Maximum Comfort

Product Ref.



Replacable twin

P3 (APF40)

Product Ref. AIR/MF/P3

Replacable twin Filters

A2P3 (APF20) Product Ref.



### AIRSHIELD PRO

Battery Powered Respirator TH2P

Battery powered respirator for use with all woodworking applications



Powered Air Purifying Respirator



Comfort Maximum

Product Ref.



Pair of TH2P≒ Filters



Product Ref.



Battery Powered Respirator TH3P
Innovatively designed battery powered respirator with hard hat protection



Powered Air Purifying Respirator



Excellent Head & Face Protection

Product Ref.



Replacable TH3P Particulate Filter



AIR PRO MAX Full face positive air flow powered respiratory

helmet with head and eye impact protection Suitable for construction and fabrication use.

All in one safety helmet for industrial rated head,

eye and respiratory protection.

For use in environments where fine airborne particles are present, dangers of flying debris, head impact or excessive noise levels.

Respiratory protection EN12941:1998+A2:2008 Protection level TH3.

*APF40* **ASSIGNED PROTECTION FACTOR** 

**BS EN 166 BS EN 12941 TH3P** 

- · Class 1 Panoramic polycarbonate visor with medium impact EN166:2002 rating to withstand high speed particles.
- Positive pressure fan driven filtered 220 litre per minute air supply; no face fit required.
- Suitable for users with facial hair or spectacle wearers.
- No problems with misting, fogging or steaming up, ensuring crystal clear vision at all times.
- Padded adjustable head harness and soft elasticated facial cuff for day long comfortable fit.
- Two 4 hour Li-ion batteries.
- Optional clip in ear defenders available for maximum protection in the workplace.
- Fully serviceable with replaceable parts and watertight bungs supplied for full water immersion cleaning.



Hard Hat Head protection for improved safety EN397:2012+A1:2012.

Integral Quiet Fan Air Blower No belt-mounted blower, no visor mist.



Flip-Up High Impact Resistant Polycarbonate Visor Optical class 1, high speed impact protection, medium energy impact approved to EN166 B, 3 resistant to liquid droplets and splashes.

2 x Fast Charge Li-Ion Battery For 8 hours use, with 2 hour charge time.



Positive Pressure Mask. No Face-Fit Requirement Allows use with beards and/or prescription glasses.



**Accessory Fitting Slot** Accepts clip-in ear defenders (not included) for increased user safety.



VIDEO

Fully serviceable Includes replaceable parts and watertight bungs supplied for full water immersion cleaning.

### **INCLUDES:** 2 x 4 hour battery 1 x Battery charger 1 x P3 HEPA filter 1 x Pack of cleaning plugs 10 x Clear visor overlay 1 x Storage bag

### SPECIFICATION:

· · · · · · · · · · · · · · · · · ·	
Rating	Professional / Individual
Assigned Protection Fact	or APF40
Airflow min.	190 l/min
Airflow fully charged	220 I/min
Size of headband	53cm - 63cm
Motor sound level	70 dB
Battery	2 x 4 hrs
Weight	1480g
Voltage	230v
	- / " 1 3

Eye protection to EN 166 1B3 (medium energy impact) Respiratory protection (NPF500) to EN 12941 TH3P. Head protection to EN 397.

REPLACEMENT PARTS:	Product Ref.	Price
1. TH3P filter (1 off)	AIR/PM/1	£29.90
2. Pre-filter (10 pack)	AIR/PM/2	£13.95
3. Tear off visor overlay - clear (10 pack)	AIR/PM/3	£14.95
4. Odour nuisance pre-filter (10 pack)	AIR/PM/6	£18.95
5. UK charger (230v)	AIR/PM/5/UK	£89.95
6. 4 Hour battery	AIR/PM/4	£59.95
7. Ear defenders SNR30 (EN353)	AIR/P/6A	£39.95



use with woodworking applications. Suitable for use when machining MDF.

• A built-in quiet fan keeps a constant flow

- of filtered air across the face.
- Provides excellent protection from inhalation of harmful dust with twin fine dust filters.
- · Protects eyes and face against flying debris.
- 98% filter efficiency.
- Combination face-seal and hood improves protection.
- 8 hour battery.
- On board battery charging.
- Approved to Standard BS EN 12941.

**AIR/PRO** £246.13



**BS EN 166 BS EN 12941 TH2P** 





gravity is achieved for balance and comfort.



Positioned away from the sensitive area of the forehead to reduce noise and irritation.




Flip-up visor Polycarbonate visor to BS EN 166 low energy

the state of the s

Replaceable Visor Visor easy to fit BS







AIRSHIELD

Twin filter Efficiency is 98% with a minimum laboratory protection factor of 50.



turning etc.

AIR/P/4

#### **INCLUDES:**

1 x 8 hour battery 1 x Battery charger 1 x Pair THP2 fine filters 1 x Airflow indicator 1 x Clear visor overlay

1 x Carry bag



### SPECIFICATION:

Rating DIY / Craftsman / Professional APF20 Assigned Protection Factor Airflow min. 160 I/min Airflow fully charged 200 I/min Size of headband 52cm-62cm Motor sound level 70 dB Battery 8 hrs 995g Weight Voltage 230v Eye protection to BS EN 166 (medium energy impact). Respiratory protection (NPF50) to BS EN 12941 TH2P.

|--|

1. Remote cradle charger To allow charging of battery independently from the AIR/PRO. Ideal when a spare battery is used

#### Product Ref. Price £37.57 AIR/P/7

REPLACEMENT PARTS:	Product Re	f. Price
2. TH2P filter pack (pair)	AIR/P/1	£29.90
3. Replacement visor overlay	y - clear	
(pack of 10)	AIR/P/3C	£22.23





4. 8 Hour battery

5. UK charger (230v)



£48.04



POWER TOOLS, SAFETY & TABLES

VIDEO TO

AIR MASK PRO FULL FACE MASK

APF20

**ASSIGNED** 

**PROTECTION** 

**FACTOR** 

**BS EN 136 BS EN 143 P3R** 

**FILTERS** 

ICLUDED

Industrial Rated Low Profile lightweight full face respiratory mask with ultra-low breathing resistance

- · All in one design incorporating high impact visor and P3 High efficiency respiratory protection.
- Large panoramic clear polycarbonate visor for superior vision in all tasks.
- Ultra-low breathing resistance for increased comfort in extended periods of use.
- Visor offers high impact eye protection for maximum safety from high velocity debris
- 5-point head harness for superior all round fit, optimising the face seal for assured protection.
- Supplied without filters to allow the user to select specific filters to protect against different materials and particulates.
- Small, medium and large options for a worry free, correct fit ensuring maximum respiratory protection.
- Bayonet fit filter connection for fast, error free attachment.

**AIR/M/FF/L** £129.95 (Large) **AIR/M/FF/M** £129.95 (Medium) AIR/M/FF/S £129.95 (Small)



Twist-on **Bayonet Fitting** for easy filter positioning and correct fool proof fit.

Twin Elastomeric Seals for air tight fit around the nose and mouth and around the face for comfortable fit and superior air leakage protection.



Large panoramic clear polycarbonate visor for superior vision in all tasks.

Product Ref



Maximum protection from sparks. swarf and metal grinding dust.



Ultra-low breathing resistance for increased comfort in extended periods of use.

#### SDECIEICATION:

OI EOII IOA IIOIN.		
Rating		DIY / Craftsman / Professional
Approval to	BS	EN 136 Full Face Mask Class 1
Assigned Protection Factor	or	APF40 with P3R filter APF20 with A2P3 filter
Weight		589a

Respiratory protection to BS EN 143 P3R. BS EN 14387 A2P3 Conforms to visor standard EN 166 B.

### ACCESSORIES:

' '	0000011101	i i oddot i ion	
١.	AirMask Pro A2 P3 filter (pair)		
	For use with Gas Class 2 Type A & combined particulate P3R	AIR/MF/A2P3	£21.95
,	AirMask Pro P3 filter (pair)		



For use with construction dust.



### How To Correctly Fit The Air Mask Pro



Place the mask on your head and tighten the straps to create an airtight seal.



Make a face fit test by blocking the filters and inhaling to check the seal for air leakage.

£12.95



SPECIFICATION:

Downward facing exhalation valve

for mist-free vision with

safety glasses.

Rating DIY / Craftsman / Professional Assigned Protection Factor Weight Eye protection to EN 166 - (medium energy impact). Respiratory protection to EN 143 P3R.

**INCLUDES:** 1 x Pair P3 filters



#### REPLACEMENT PARTS: Product Ref. Price P3 Filter (pair) STEALTH/1 £9.82 5 off **STEALTH/1/5** £42.38

Large filter area

for easy breathing with easily adjustable straps

and soft rubber face seal for superior fit

trend

P3 Nuisance filter (pair) STEALTH/3 £11.62 5 off STEALTH/3/5 £52.99




\* High Efficiency Particulate Air Composite.

	SIZ	E GUIDE		
Face Length (bridge of nose) to (Chin) (mm)	128.5mm - 138.5mm	M/L	M/L	M/L
	118.5mm - 128.5mm		M/L	M/L
	108.5mm - 118.5mm			M/L
	98.5mm - 108.5mm			_

Maximum protection from sparks,

swarf and metal grinding dust.





Large panoramic clear polycarbonate

visor for superior vision in all tasks.

AIR STEALTH P3(R) HALF MASK P3R half mask with low profile ergonomic design. Offers less breathing resistance. Less clogging pressure and inward leakage. APF20 • Approval P3(R) APF20 x WEL. **ASSIGNED** Protects the user against airborne particles, PROTECTION oil aerosols, mist, welds and fumes. **FACTOR** Twin HEPAC\* pleat encapsulated design filter **BS EN 140** provides 99.99% filtration of airborne particles **BS EN 143 P3R** and aerosols at 0.3 micron and above. Exhalation valve on bottom of face piece, CE ensuring no exhalation air, steam or fog of any glasses/visors. · Protective grill covers 100% of filter surface. Grill protects filter from moisture and particulates, ensuring it performs better in clogging pressure and filtration efficiency. Approved to Standard BS EN143 P3R. STEALTH/SM £23.29 (Small/Medium) **STEALTH/ML** £23.29 (Medium/Large) **High Grade Materials** Protective Grills **Neck Strap** Made with odour Protect the filters from Comfortable head and neck free, non-allergenic larger particles & strap with quick release. materials moisture.

Downward facing exhalation valve for mist-free vision with safety glasses.

Integral Sample Port Unique integral sample port and plug allow nondestructive face fitting.

Large filter area for easy breathing with easily adjustable straps and soft rubber face seal for superior fit.

Includes a pair of P3 Filters. For 99.99% filtration efficiency.



### SPECIFICATION:

Rating	DIY / Craftsman / Pr	ofessional
Assigne	d Protection Factor	APF20
Weight		131g
Respirato	ry protection to BS EN 1-	43 P3R.

**INCLUDES:** 1 x Pair P3 filters 1 x Storage bag





#### REPLACEMENT PARTS: Product Ref. Price P3 Filter (pair)

• · · · · · · · · · · · · · · · · ·		
1 off	STEALTH/1	£9.82
5 off	STEALTH/1/5	£42.38
2. Storage case	STEALTH/2	£15.86
3. P3 Nuisance filter (pair)		
1 off	STEALTH/3	£11.62
5 off	STEALTH/3/5	£52.99



### SIZE GUIDE

	128.5mm - 138.5mm	M/L	M/L	M/L
(mm)	118.5mm - 128.5mm	S/M	M/L	M/L
to (Chin)	108.5mm - 118.5mm	S/M	S/M	M/L
	98.5mm - 108.5mm	S/M	S/M	S/M
		120.5mm - 133mm	133mm - 146mm	146mm - 158.5mm





AIR STEALTH LITE PRO FFP3 R D MASK APF20

Lightweight frame with reusable disposable FFP3 R D rated filters.

- Full 8 hours of use per filter for all day protection.
- HEPAC\*-Lite filter media for 99%+ filtration efficiency, captures dust as fine as 0.3 microns at 50 litres per minute.
- Suitable for all woodworking tasks, masonry and demolition work, fibreglass, mixing concrete, mortar and plaster, welding, hand and power sanding and many more.
- Available as a single mask or in a pack of 5 filters and a frame assembly.
- Reusable frame and head straps.

**STE/LP/ML** £5.99

(1 Complete Mask)

**STE/LP/ML/5** £24.95

(1 Complete Mask + 4 Additional Filters)



**ASSIGNED** 

**PROTECTION** 

**FACTOR** 

**BS EN 149** 

FFP3 RD

CE

Lightweight mask for reduced user fatigue with minimal breathing resistance

Frame and straps are easily removed to change filters.




Downward facing exhalation valve for mist-free vision with safety glasses.


Large filter area for easy breathing with easily adjustable straps and soft rubber face seal for superior fit.

#### SPECIFICATION:

Rating	DIY / Craftsman / Pr	rofessional
Assigned Protection	Factor	APF20
Weight		58g
Respiratory protection	to BS EN 149 FFP3 RD.	

\* High Efficiency Particulate Air Composite.







Protects the user from hazardous dust down to 0.3 microns and fumes with 99%+ filtration efficiency.

### SAFETY SPECTACLES

With durable anti-shock. anti-scratch and UV protection.

- Comfortable and light stylish wrap around frame and curved lens for a snug close fit.
- Durable scratch-resistant polycarbonate lens provide impact and UV protection.
- · Protection against high speed particles low energy impact.
- Approved to EN 166:2001 standard for eye protection.
- · Supplied with storage bag and cleaning cloth.



Curved lens for snug fit.

**SAFE/SPEC/A** Clear lenses class 2-1.2 1F £5.73

**SAFE/SPEC/B** + Grey lenses class 5-3.1 1F solar protection £5.56






POWER TOOLS, SAFETY & TABLES

### PRO ROUTER TABLE

Professional portable router table with aluminium surface and backfence for floor and bench mounting use.



- T11E quick release fixing holes for fitting T11 fixing kit.
- Bench leg level adjustment when mounted on a bench.
- 20mm hole for the T11 Quick Raiser adjuster handle.
- · Floor or bench standing with removable legs and adjustment for uneven floors.
- Extruded 8mm thick aluminium alloy table top with minimal loss of cutter depth.
- Cutter aperture of 90mm allows the use of the largest router cutters available.





Quick release 110mm cast aluminium

backfence with adjustable aluminium cheeks and squareness adjustment.

COMPATIBILITY

www.trend-uk.com/compatibility



trend-uk.com/video

VIDEO TO WATCH

57mmØ (2-1/4") dust spout aperture With freehand lead-on

90mmØ aperture For larger panel raiser cutters.

Side scales to

set backfence. Pushstick park on rear. No-volt release switch with 115 volt (16A) available.

Leg clamps to remove lower legs and adjust for uneven floors.

Cast backfence with extruded adjustable alloy cheeks and 'T' slots. · Made to EN standards, with backfence accuracy of 0.5° and table flatness of 0.5mm.

· Suitable size and weight enabling easy re-positioning around the workshop and transportation for on-site use.



different cutter diameters.







Bench leg level adjustment For uneven surfaces.



Flip-up finger pressure and guard assembly For easy access to cutter.

T11 quick release fixing holes Allows T11 to be fitted to the table quickly and removed when used with optional Quick

Release Kit.

Side finger pressures Adjustable position for different widths of timber.



trend

Mitre fence with zeroing and spelch block facility



Quick raiser Includes hole for T11's fine height adjuster.

### **INCLUDES:**

4	Χ	Insert rings
1	X	No-volt release switch
1	Χ	Mitre fence
2	Χ	Finger pressures
1	Χ	Large adjustable safety guard
1	Χ	Lead-on pin
1	X	Pushstick

SPECIFICATION:	
Rating	Professional / Trade
Table size	650mm x 550mm
Bench height	350mm
Height with legs	860mm
Router cutter aperture	90mmØ
Insert ring sizes	20mm, 35mm, 54mm, 72mmØ
Backfence height	110mm
Dust spout aperture	57mmØ (2-1/4")
Voltage	240v or 115v
Weight	26.2kg

115v unit supplied with 16A BS4343 plug and socket. Not intended for continuous production or production line use

### Fits the following routers directly:

TREND T5, T5 MK2, T9, T10 ◆, T11 ◆ BOSCH GOF1600A, 1700ACE CMT CMT1E, 2E DEWALT DW613, 614, 615, 620, 621, 624, 625€ ◆ 626 ◆, 629 ◆ DRAPER PT1200V ELU MOF96(E) MK2, 131, 177(E), OF97(E) MAKITA RP0910, 1110C PERLES OF808(E) >1999 ◆ Not 115v



115v routers over 1850w (including T10 and T11) cannot be used with no-volt release switch router tables. Removable centre plate of table will need to be re-drilled for other makes and models of medium and heavy duty routers.

### FLOOR STANDING **WORKSHOP** ROUTER TABLE

Packed with the necessary features to maximise the versatility of all popular portable routers.

- Large laminated MDF table.
- Removable 6.35mm thick aluminium insert plate with 98mm dia. aperture, pre drilled for Trend TBC routers and T11 routers.
- Quick release aluminium extrusion backfence with sliding MDF cheeks.
- Quick Raiser and Quick Release facility for T11 router.
- High backfence with fully adjustable guard assembly.
- Fully adjustable side finger pressure.
- Front and side adjustable feather pressure guards.





98mmØ aperture

For larger panel

raiser cutters.



Includes hole for T11's fine

height adjuster.

**Backfence** With edge planing facility.

2 Insert rings 31.8mm and 67.5mmØ.

**WRT** (240v) £370.25

Accessing base board fixing holes.









### **INCLUDES:**

- 2 x Insert rings
- 1 x No-volt release switch 1 x Mitre fence
- 2 x Finger pressures
- 1 x Safety guard
- 1 x Lead-on pin 1 x Pushstick
- 1 x T11 Quick Raiser Handle park

### SAFETY FEATURES:

- No-volt release switch
   Sliding fence cheeks
- Adjustable top guard Two insert rings
- - Adjustable pressures Pushstick

T11 quick release fixing holes Allows T11 to be fitted to the table

quickly and removed when used with

optional Quick Release Kit.



Side finger pressures

Fully adjustable.

Adjustable feet For uneven surfaces.



No-volt release switch

Supplied as standard

Accessory hooks on



Mitre fence Mitre fence with zeroing and spelch block facility

### SPECIFICATION:

Rating	Professional / Craftsman
Table size	804mm x 604mm
Table height	890mm
Router cutter apert	ure 98mmØ
Insert ring sizes	31.8mm, 67.5mm
Backfence height	68mm
Dust spout aperture	e 57mmØ (2-1/4")
Edge planing	1.4mm and 2.4mm
Voltage	240v
Weight	27.5kg

OPTIONAL ACCESSORIES:	NAL ACCESSORIES: Product Ref.	
T11 quick release kit     Allows T11 router to be quickly		
fitted and removed from table.	T11/JT/KIT	£30.56
2. Hose with adaptor 39mmØ x 3 metre with		
57mmØ (2-1/4") adaptor fitted.	CRT/4	£25.02
3. Down pressure		
(Pair)	WRT/1	£16.34
4. Adjustable limit stop	WRT/2	£16.34
5. Castors (4 off)		
Raises table to height by 35mm.	WRT/3	£32.73


### Fits the following routers directly:

TREND T5, T9, T10, T11 BOSCH GOF1600A, 1700ACE CMT CMT1E, 2E

DEWALT DW613, 614, 615, 620, 621, 624, 625E◆ 626◆ 629◆ DRAPER PT1200V

ELU MOF96(E) MK2, 131, 177(E), OF97(E) MAKITA RP0910, 1110C

PERLES OF808(E) >1999



### **CRAFTPRO** ROUTER TABLE MK3

VIDEO

TO

trend-uk.com/video

The CRAFTPRO Router Table will suit craftsmen and woodworking enthusiasts. It is packed with the necessary features to maximise the versatility of all popular portable routers.

- Laminated MDF table top 610mm x 405mm x 26mm thick.
- Removable 6.35mm aluminium insert plate with a 98mm diameter aperture to accept large panel raisers.
- T11E quick release fixing holes for fitting T11 fixing kit.
- Plate levelling facility using seven screw adjusters and magnets. Plate is screwed to table top for added security.
- Includes two insert rings, sizes 31.8mm and 67.5mm to reduce table aperture.
- Adjustable backfence with sliding cheeks.
- · Lead-on pin for bearing guided curved work.
- 20mm hole for the T11 Quick Raiser fine height adjuster handle.
- · Edge planing facility of 1.4mm or 2.4mm.

**CRT/MK3** (240v) £245.07 or **CRT/MK3L** (115v) £276.89





Adjustable feet for levelling and bench

Side finger pressure Fully adjustable

> o-volt release switch Supplied as standard

Guard assembly

Fully adjustable

### SAFETY FEATURES:

- No-volt release switch
- · Adjustable top and side pressure
- Adjustable top guard
- · Sliding fence cheeks
- Two insert rings
- **Pushstick**







Aluminium plate 6.35mm thick with levelling facility and lead-on pin.



T11 quick release fixing holes Allows T11 to be fitted to the table quickly and removed when used with optional Quick Release Kit.



ROUTER TABLE

Quality mitre fence With zeroing and spelch block facility.



Quick raiser Includes hole for T11 fine height adjuster.



Quick release backfence Extruded aluminium with adjustable MDF cheeks and edge planing facility.

57mmØ (2-1/4")

Dust spout aperture

98mmØ aperture

### INCLUDES:

2 x Insert rings	2 x Finger pressures
1 x No-volt	1 x Safety guard
release switch	1 x Lead-on pin
1 x Mitre fence	1 x Pushstick

SPECIFICATION:	
Rating	Craftsman
Table top size	610mm x 405mm
Table height	410mm
Router cutter aperture	98mm
Insert ring sizes	31.8mm, 67.5mmØ
Backfence height	67mm
Dust spout aperture	57mmØ (2-1/4")
Edge planing	1.4mm and 2.4mm
Voltage	240v or 115v
Weight	13.6ka

115v unit supplied with 16A BS4343 plug and socket Not intended for continuous production or production

#### **OPTIONAL ACCESSORIES:** Product Ref. Price Hose and hose adaptor

39mmØ x 3 metre with a CRT/3 adaptor fitted.

Adaptor is 57mmØ (2-1/4") to 35mmØ and accepts 39mmØ hose

Hose with adaptor CRT/4 £25.02 Adaptor CRT/3 £12.59 T11 quick release kit T11/JT/KI £30.56





Edge moulding



Edge planing

### Fits the following routers directly:

TREND T5, T9, T10◆, T11◆ BOSCH GOF1600A, 1700ACE CMT CMT1E, 2E DEWALT DW613, 614, 615, 620, 621, 624, 625E◆, 629◆ DRAPER PT1200V ELU MOF96(E) MK2, 131, 177(E), OF97(E) MAKITA RP0910, 1110C PERLES OF808(E) >1999

◆ Not 115v



115v routers over 1850w (including T10 and T11) cannot be used with no-volt release switch router tables.

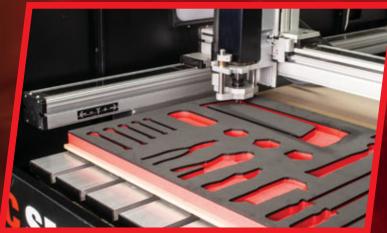
Removable centre plate of table will need to be re-drilled for other makes and models of medium and heavy duty routers.

To download videos, test reviews, spare parts & instruction manuals

visit: www.trend-uk.com/downloads

### **CNC MINI & CNC SMART MACHINES**









### **CNC MINI MACHINES**

CNC MINI PLUS	142
CNC MINI	143
CNC ROTARY	144
CNC MINI CUTTERS	145
CNC MINI ACCESSORIES	145

### **CNC SMART MACHINES**

CNC SMARTBENCH	146
CNC SMART	148
CNC SMART PLUS	148
CNC SMART FAST	148
CNC SMART LITE	149

### **CNC SMART OPTIONS**

MOTOR HEADS	150
VACUUM PUMPS	150
CNC LITE BENCH	150
CNC VACUUM TABLE	150

### **CNC SOFTWARE**

VECTRIC V CARVE DESKTOP	150
VECTRIC V CARVE PRO	150

CNC MINI ROTARY 144





### CNC MINI PLUS

(

Desktop miniature engraving machine for 2D and 3D engravings, photo images and routing projects. Comes with easy to learn software.

CNC Carving machine can create or import G-codes for CNC carving programs. This function allows you to use additional software programs, such as VCarve and BMP programmes.

Desktop model with micro switch fully guarded safety dust cover for safe operation making it ideal for education.

Table size 450mm x 440mm with total engraving area (XYZ travel) 300mm x 300mm x 100mm.

Brushless 150 watt DC motor for low noise and durability for use with 1/4 inch collet capacity.

Endless possibilities in what you can create: use images from digital photos, CAD drawings, computer generated art programs, scanned images and more.

Use with hardwoods, softwoods, exotic woods and many synthetic materials such as acrylic and ABS plastic, foam, modelling wax, styrene, epoxy board. Ideal for use with white, brown and clear acrylic to create highly detailed carvings.

**CNC/MINI/2** £2,625.00

### **INCLUDES:**

- 1 x USB 2.0 cable
- 1 x Bravo software disk contains CNC and Edit
- 1 x Workpiece clamp set (comprising 2 large & 2 small clamps)
- 1 x USB controller
- 1 x Support board
- 1 x Silicone mat
- 1 x Ball nose carving bit R0.5mm Ref. S66/4X4MMSTC
- 1 x Conical radius carving bit R0.5mm Ref. S66/2X4MMSTC
- 1 x Zeroing point paper

1 x Hex key 2.5mm A/F







Table size		450mm x 440mm
Table load weight		max. 3kg
Max. movement	X-axis 300mm, Y-a	xis 300mm, Z-axis 100mm
Max. material thick	ness	100mm
Engraving speed		40 - 2500mm/min
Resolution		0.02mm
Power supply		input 220-240v output DC 24v 4.5A
Spindle motor		150w DC
Power consumption	า	2.0A
Collet capacity		1/8", 4mm & 1/4"
Operating noise lev	vel (standby)	39.6dB (A)
No loading operation	on noise	< 66dB (A)
Spindle speed		0-20,000 rpm
Interface		USB 2.0
Machine		870 x 610 x 560mm
Weight		54.5kg



# CNC MINI

The CNC Mini is the latest desktop miniature engraving machine for 2D and 3D engravings, photo images and routing projects. Comes with easy to learn software.



• CNC Mini Engraver can create or import G-codes for CNC carving programs. This function allows you to use additional software programs, such as VCarve and BMP programmes.

Table size 320mm x 150mm with full-wrap dust enclosure. Total engraving area (XYZ travel) 220mm x 160mm x 63mm.

Maximum material thickness 60mm with a resolution of 0.05mm.

 Small lightweight desktop model with micro switch safety cover for safe operation, making it ideal for use in schools and colleges.


• Brushless 80 watt DC motor for low noise and durability for use with 4mm shank tools.

• Use with hardwoods, softwoods, exotic woods and many synthetic materials such as acrylic and ABS, plastic, foam, modelling wax, styrene, epoxy board. Ideal for use with white, brown and clear acrylic to create highly detailed carvings.

**CNC/MINI/1** £1,725.00

## INCLUDES:

- 1 x USB 2.0 cable
- 1 x Bravo software disk Contains CNC and Edit
- 1 x Workpiece clamp set (comprising 2 large & 2 small clamps)
- 1 x USB controller
- 1 x Support board
- 1 x Silicone mat
- 1 x Ball nose carving bit R0.5mm Ref. S66/4X4MMSTC
- 1 x Conical radius carving bit R0.5mm Ref. S66/2X4MMSTC
- 1 x Zeroing point paper
- 1 x Hex key 2.5mm A/F



### **SPECIFICATIONS:**

Table size	320mm x 150mm
Table load weight	max. 2kg
Max. movement X-axis 220mm, Y-axis	160mm, Z-axis 63mm
Max. material thickness	60mm
Engraving speed	40 - 2500mm/min
Resolution	0.05mm
Power supply	input 220-240v output DC 24v 4.5A
Spindle motor	80w DC
Power consumption	2.0A
Shank capacity only	4mm
Operating noise level (standby)	39.6dB (A)
No loading operation noise	< 66dB (A)
Spindle speed	0-15000 rpm
Interface	USB 2.0
Machine size	390 x 400 x 425mm
Weight	14.7kg

220<sub>mm</sub>





# **CNC MINI ROTARY**





Desktop cylinder CNC router is for small woodworking projects, ornament and tiny furniture.

- Desktop model with micro switch fully guarded safety dust cover for safe operation making it ideal for education.
- Endless possibilities in what you can create: use images from digital photos, CAD drawings, computer generated art programs, scanned images and more.
- Maximum component diameter of 200mm with working length of 300mm.
- Brushless 150 watt DS motor for low noise and longer life expectancy with belt-driven head.
- Includes a simple, straight forward common platform software package.
- Works with any PC computer running Windows XP up to Windows 10.
- Use on hardwoods, softwoods, exotic woods and many synthetic materials such as acrylic, and ABS, foam, modelling wax, styrene and epoxy board.

# **CNC/ROT/1** £4,902.80

# INCLUDES:

1 x USB 2.0 cable

1 x Bravo Edit software disk

1 x USB controller

1 x Collet extension kit with 4mm and 1/4" collet

1 x End Mill 2 Flute Cutter D3.96mm Ref. S66/11X4MMSTC

1 x Conical radius carving bit R0.5mm Ref. S66/2X4MMSTC

1 x Spike chuck

1 x Four jaw chuck

1 x Hex key 2.5mm A/F

1 x Instruction manual

# Cutting Area





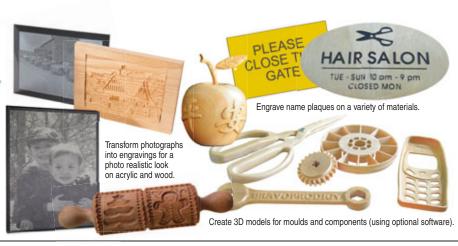
## SPECIFICATIONS:

Max. working length	300 mm
Max. component dia.	200 mm
Table load weight	max. 5kg
Fixed thimble clamp dia.	200 mm
Jaw chuck inner clamp dia.	2 mm to 16 mm
Jaw chuck inner clamp dia	25 mm to 60 mm
Jaw chuck outer clamp dia.	22 mm to 55 mm
Engraving speed	40 - 2500mm/min
Resolution	0.02mm
Power supply	input 220-240v output DC 24v 6.5A
Spindle motor	150w DC
Power consumption	2.0A
Collet capacity max.	1/4"
Operating noise level (standby)	39.6dB (A)
No loading operation noise	< 66dB (A)
Spindle speed	0-17000 rpm
Interface	USB 2.0
Machine size	635 x 366 x 610mm
Weight	42kg



# **APPLICATIONS**





# STANDARD **FEATURES SOFTWARE**

### **Graphical User Interface**

Vivid interface and simple operation has been designed for any user.



#### **Digital Photo**

Engrave digital photos onto wood and acrylic easily. The EDIT software accepts file formats such as: .bmp, .jpg, .png.

### **Save Money**

With our software suite: EDIT and CNC, there is no need to buy other off-the-shelf software to complete your own engraving project.

## **High Compatibility**

Compatible with Vcarve, ArtCAM and BMP programs.

## **OPERATION**

#### **Easy to Operate**

Four simple steps to create signs, plaques and models. Use game pad to control the movement or the computer interface.

#### Design

Designed especially for beginners with straight forward and simple operation. Fully enclosed for safety, with micro switch cut out.

### **Compact and Portable**

Move this compact and portable desktop machine from place to place with ease. Engrave wherever and whenever you like.

### All in One

Drill, rout, mill, cut, shape and carve.

#### **Multi-function**

Ideal for school and colleges, the hobbyist, DIY projects and businesses.

# **System Requirements**

PC running Windows XP up to Windows 10.

# SOLID TUNGSTEN CARBIDE

# **MINI ENGRAVER CUTTERS**


Description	Dimensions (not to scale)	Profile shape	Engraves material	Tool preset code	Product Ref. & Price	Actual size cutters
R0.25mm	R0.25mm		Wood, Acrylic & ABS	4025C150	\$66/1X4MMSTC £29.63	The state of the s
R0.5mm tonical max. 3.7mr radius, two flute up-cut spiral	R0.5mm		Wood, Acrylic & ABS	4050C150	\$66/2X4MMSTC £29.63	1000
R0.25mm ball nose, two flute up-cut spiral	R0.25mm		Acrylic & ABS	4025A020	\$66/3X4MMSTC £29.63	
R0.5mm ball nose, two flute up-cut spiral	R0.5mm		Acrylic & ABS	4050A020	\$66/4X4MMSTC £29.63	W1055
R0.5mm 1 1 max. 3.5m max. 3.5m max. 3.5m flute flat	m = 15.0mm		Wood	4050E150	\$66/5X4MMSTC £22.52	
R1.5mm ± And the state of the s	1.5mm		Wood	4150E150	\$66/6X4MMSTC £22.52	
2.5mm 1 2.5m end mill, 2.5m two flute up-cut spiral	12.0mm		Wood, Acrylic & ABS	4250B120	\$66/10X4MMSTC £17.76	
3.96mm ± 3.96m two flute up-cut spiral	nm		Wood, Acrylic & ABS	4400B150	\$66/11X4MMSTC £17.76	

# TUNGSTEN MINI V-GROOVE ENGRAVER CUTTERS TIPPED

Description	Dimensions (not to scale)	shape	material	preset code	& Price	cutters
30° included angle, two flute 'v' engraver	6.3mm 75°		Wood	4635V030	<b>CNCM/1X4MMTC</b> £12.75	
60° included angle, two flute 'v' engraver	6.3mm 60°		Wood	4635V060	CNCM/2X4MMTC £12.75	













# **ACCESSORIES**

	Product Ref.	Price
ER11 Collet conversion	kit with 3 collets	
1/8", 4mm & 1/4" collets	CNCM/ER11/KIT*	£92.01

# ArtCAM Express

Upgrade to VCarve Pro for a more fully featured software CNC/VCARVE/P £556.20

<sup>\*</sup> Note: Reduces Z axis depth of cut to 40mm.





Price Acrylic insert material 10 pack 186 x 135 x 2mm, brown TM/IP/B/10 £14.14



# CNC SMARTBENCH NEW

Full 8' x 4' sheet size CNC router. With a 3 minute setup time, the SmartBench transforms routing by bringing precise machining to the jobsite.

- With a 3 minute setup time, the SmartBench revolutionizes the industry by allowing you to take precise machining to the jobsite. Featuring a colour touchpad handheld control unit that can receive jobs/cutting instructions via wi-fi or USB drive.
- Full 8 foot x 4 foot panel machining can be achieved, with a cutting height of 152mm / 6" (Z height). Longer items can be tiled in the software allowing you to machine products that are longer than 8 foot.
- Dust collection ready, the SmartBench allows you to work on other tasks while it drills, pockets, mortises, carves, or dados your project.
- Take CNC routing out of the factory and into your workshop with SmartBench, the patented large format, CNC router from YetiTool.
- · With it's touchscreen assistant, light compactable frame and 3-axis cutting capability, everything has been reimagined in designing this industrial grade, user-friendly smart router.
- · Not only that, it assembles in 3 minutes or less and can be stored in even the tightest of workshops/industrial units.
- · Now you can own a large format CNC at an affordable price with a space friendly footprint.

# **CNC/YETI/SB1** £4,695.00

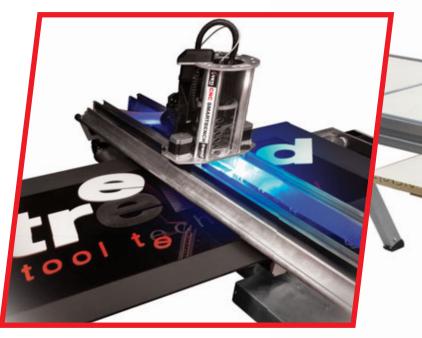
Standalone CNC SmartBench.

# **CNC/YETI/SB1S** £5,215.00

CNC SmartBench & Vcarve Pro Software.

# **CNC/YETI/SB1K** £5,585.25

CNC SmartBench, T35A Vacuum Extractor & Vcarve Pro Software.



## **SPECIFICATIONS:**

2500 x 1250 mm
152mm
1265 mm 6 m/m
2515 mm 6 m/m
152 mm 2 m/m

Spindle Collet	ER16	Max. shank 10 mm
Max. Feed Rate		6m/min
Component Tolera	nce	+/- 0.5mm
Spindle speed		5,000-25,000 rpm
Machine size	274	0 x 1650 x 1350mm
Weight		105kg













# CNC SMART, SMART PLUS & SMART FAST

The CNC SMART, SMART PLUS and SMART FAST are all high performance floor mounted machines for improved routing productivity. SMART FAST has 15 metres per minute feed rate and the SMART FAST Y1300 has a Y axis of 1420mm.

- Available with three motor head options and two maximum feed speed options.
- CNC Smart Plus T10 has a medium duty head using a 2000 watt single phase head.
- CNC Smart Plus has a high frequency head fitted and a maximum feed speed of 3 metres per minute.
- CNC Smart Fast comes with a high frequency head and a maximum feed speed of 15 metres per minute.
- Solid construction with enclosed steel cabinet with interlocking door and floor stand, meeting the requirements of EN 848 Part 3.

# CNC/PLUS/T10 £23,413.00

860 x 920 machine with 90mm of plunge fitted with T10 router.

# CNC/SMARTPLUS £24,450,00

860 x 920 machine with 90mm of plunge fitted with HF head.

# **CNC/SMARTFAST** £28,325.00

860 x 920 machine with 90mm of plunge fitted with HF head & max. speed of 15m per min.

# **CNC/SMART1300** £33,400.00

2075mm

860mm

920mm

90mm

3-50mm/sec

3-50mm/sec

3-50mm/sec

50mm/sec

<0.1mm

220-230v

2000W

85dB

350kg

1790 x 760mm

8000-24000

860 x 14200 machine with 90mm of plunge fitted with HF head & max. speed of 15m per min.

### **APPLICATIONS**



Product Ref.

**CNC/SMARTPLUS** 

1854mm

1530mm

1750mm

2075mm

860mm

920mm

90mm

3-50mm/sec

3-50mm/sec

3-50mm/sec

50mm/sec

<0.1mm

220-230v

2000W

80dB

350kg

1790 x 760mm

3000-18000



Product Ref.

**CNC/SMARTFAST** 

854mm

1530mm

1750mm

2075mm

860mm

920mm

90mm

3-250mm/sec

3-250mm/sec

3-250mm/sec

250mm/sec

<0.15mm

220-230v

2000W

80dB

350kg

1790 x 760mm

3000-18000



Product Ref.

CNC/SMART1300

854mm

2910mm

1750mm

2075mm

860mm

1420mm

90mm

3-250mm/sec

3-250mm/sec

3-250mm/sec

250mm/sec

<0.15mm

220-230v

2000W


80dB

420kg

1790 x 700mm

3000-18000





2150 \_\_\_\_ (2530 for Y1300) Side view (mm)



1450 1854 Front view (mm)





VIDEO TO



Foam tool control routing



Aperture being cut for glass in kitchen door cabinet.



Height door open

SPECIFICATION:

Max. movement X-axis Max. movement Y-axis

Max. movement Z-axis

Max. cut feed rate X-axis

Max. cut feed rate Y-axis

Max. cut feed rate Z-axis

Max. non cut feed rate

Positional accuracy

Maximum wattage

Min. size doorway

Spindle speed

Maximum noise

Weight

Power supply

# CNC SMART LITE

The bench mounted CNC SMART LITE is the smallest CNC Machining Centre offering all of the advanced electronic control features and component structure of the larger Smart machines.

- Available with two motor head options:-
  - Medium duty 2000 watt single phase.
  - Heavy duty high frequency.
- Bench mounted (optional bench available).
- Single phase power supply for all Lite machines.
- Solid aluminium axis construction.
- Bach operating software to control machine movements and running of programs.
- · Requires a PC to run.

# CNC/LITE/T10 £17,817.97

600 x 600 machine with 90mm of plunge fitted with T10 router.

# **CNC/LITE/HF** £20,579.40

 $600 \times 600$  machine with 90mm of plunge fitted with a HF head.



The latest miniature engraving machines for 2D & 3D projects. See pages 150-151 for full details.

CNC


















	Product Ref. CNC/LITE/T10	Product Ref. CNC/LITE/HF
DIMENSIONS:		
Width	1285mm	1285mm
Depth	1474mm	1474mm
Height door shut	975mm	975mm
Height door open	1900mm	1900mm
SPECIFICATION:		
Max. movement X-axis	600mm	600mm
Max. movement Y-axis	600mm	600mm
Max. movement Z-axis	90mm	90mm
Max. cut feed rate X-axis	3-50mm/sec	3-50mm/sec
Max. cut feed rate Y-axis	3-50mm/sec	3-50mm/sec
Max. cut feed rate Z-axis	3-50mm/sec	3-50mm/sec
Max. non cut feed rate	50mm/sec	50mm/sec
Positional accuracy	<0.1mm	<0.1mm
Power supply	220-230v	220-230v
Maximum wattage	2000W	2000W
Maximum noise	85dB	80dB
Weight	200kg	350kg
Min. size doorway	1790 x 760mm	1790 x 760mm
Spindle speed	8000-20000	3000-18000

### **TECHNICAL DIAGRAMS:**



Side view (mm)



Front view (mm)

## **HOW IT WORKS**



Computer software design.



Tags holding mould workpiece in place



Routing the profile.



Final finishing

# CNC SMART **OPTIONS**

# **MOTOR HEADS** Heavy Duty High Frequency

Enables 24/7 machining capability to the range of CNC Smart machines. Collet size up to 1/2" (12.7mm). Available in 18000 rpm or 24000 rpm. Please state speed when ordering.





(6

# **VACUUM PUMPS**

This Becker pump is a single phase side channel high efficiency pump, which incorporates a high build quality with low running cost. The pump comes complete with a relief valve and a 0.5 micron filter.


CNC/VAC/PP

£2,999.00









### CNC/VAC/PP/3P

£3495.00



### **CNC LITE BENCH**

Purpose built bench for CNC Lite machines. Made from aluminium extrusion with adjustable feet for levelling.

**CNC/LITE/FS** £1,387.66





### **VACUUM TABLE**

These 3 sizes of vacuum table are suitable for all of the machines. Made from an aluminium box section assembled, capped & inter-linked with 32mm diameter pipe work. This in turn is connected to the vacuum pump. The aluminium box section is surfaced with cells constructed from Foamex strips. The Y130 vacuum table has 140 cells, TABP has 98 cells & TABL has 55 cells.

**CNC/VAC/TABP** £1,568.01 For CNC/PLUS/T10 & CNC SMARTFAST

CNC/VAC/Y1300 £1,726.08

CNC/VAC/TABL £1,568.01 For CNC/SMART/LITE, CNC/LITE/T10 & CNC/LITE/HF machines.



### CREATIVE CNC SOFTWARE







VCarve gives you the power to produce complex 2D patterns with profile,

pocket, drill and inlay toolpaths, plus the ability to create 2.5D designs with v-carving, prism carving, mouldings, textures and fluting toolpaths and import Vectric 3D clipart or single model files. The 'Desktop' edition is designed for small CNC machines, aimed at hobby or non-production environments whereas the 'Pro' edition gives you unlimited job and toolpath size, true shape nesting and job set-up sheets, suited to a production environment.

## **Kev FEATURES**

- Ability to import 2D vector files and bitmap
- Complete set of 2D design and layout tools.
- Import single 3D model files (STL, OBJ, 3DM,
- Import multiple 3D clipart files available from the Design & Make store.
- Single sided, double sided and wrapped rotary iob types.
- 2D toolpaths: profiling, pocketing, drilling, inlays and quick engraving.
- 2.5D toolpaths: v-carving, prism carving, mouldings, textures and fluting.
- 3D machining.
- Support for add-on gadgets (Pro only).
- Ability to merge toolpaths (Pro only).
- Toolpath templates and job sheets (Pro only).
- Ability to simulate the toolpaths.
- · Free 2D & 3D clipart.

#### CNC/VCARVE/D £275.00

Work on parts larger than 24"x 24" (600mm x 600mm). True Shape Nesting for material optimization. Toolpath Templates. Merge Toolpaths.


Job Setup Sheets. Gadget (scripting) support. Rotary Axis (Wrapping).

CNC/VCARVE/P £540.00











# **ROUTING JIGS & ACCESSORIES**









# **WORKSHOP JIGS**

SCRIBE-MASTER PRO JIG	152
MORTISE & TENON JIG	153
DOVETAIL JIGS	154
STAIRCASE HOUSING JIGS	155
ROUTABOUT HOLE CUTTER JIG	156

# KITCHEN FITTING JIGS

KITCHEN WORKTOP JIGS	158 -162
WORKTOP JIG ACCESSORIES	163 -164
SPECIALIST WORKTOP JIGS	165 - 169

# **DOOR HANGING JIGS**

HINGE JIGS	170 - 173
LOCK JIGS	174 - 176
DOOR HANGING	
ACCESSORIES	177 - 179
LETTERBOX JIGS	180

# **JIGS & ACCESSORIES**

COMBINATION BASE		181
COMPASS & ELLIPSE JIGS	181 -	182
VARIJIG FRAME SYSTEM	184 -	186
TEMPLATES & ACCESSORIES	188 -	197
UNIBASE		190
ROUTER POD		194

KWJ700S MULTI-MATERIAL WORKTOP JIG\_\_\_\_

161



MULTIFUNCTIONAL TABLE TOP JIG









Mounted on the chop saw stand skids with the accessory Quick Mount Kit Ref. SM/MKP.



Close-up of cut.

Size:

Weight

Board height

SPECIFICATION:

Max. thickness board

Min. length board

- 1. Steel combs are pushed into the sample mould. Works with any profile.
- 2. Comb assembly is then turned over to give a scribe.
- 3. Copy pin then follows the scribe contour allowing the router cutter to cut the scribe.



- just 15 seconds.
- Fully variable, up to ten times faster than manual scribes.
- Scribes profile into kitchen plinths.
- Scribes warped boards accurately and also suitable for walls that are not plumb.
- Includes 1/4" shank HSSE spiral router cutter for softwood and MDF\* skirting.
- Made from high pressure laminate for stability.
- Requires a medium to heavy duty plunge router with 30mm guide bush fitted.

**SM/PRO** £342.67



Scribes differing skirting boards.



Price

Product Ref.

INC	CLUC	ES:		
4	1	aniral	4 / 422	

4mm spiral 1/4 shank HSSE router cutter

1 x Comb aligning tool 1 x Material hold down clamp



Certain makes & models of router will require a Unibase to accept the guide

\*The abrasive nature of MDF will lead to premature tool wear.

550mm x 312mm x 150mm

195mm

300mm

5.92kg

#### OPTIONAL ACCESSORIES: Product Ref. Price Quick mount kit £26.72 For mitre saw leg stand. 32mm Tenon slide plate For through housings, half laps and £46.54 tongue & groove lining joints. 3. HSSE 8mm shank cutter two flute Size: 4mmØ x 40mm x 90mm OL SMC/03X8MMHSS £38.36 Down-cut for hardwood. 4. Carry bag SM/BP £34.89 5. Universal sub-base UNIBASE £20.51 30mm guide bush **GB30** £9.14

7. HSSE 1/4" shank cutter two f Size: 4mmØ x 40 x 90mm OL	lute	
Down-cut for softwood.	SMC/02X1/4HSS	£34.8
	3.	7.
4.		6.

# TENON SLIDE TEMPLATE ACCESSORY

Use with a suitable straight diameter cutter Max diameter 22mm





Through housing joint using tenon slide template.



REPLACEMENT PART:

Router not included.

**MORTISE** & TENON JIG

International PCT application No. PCT/GB02/00253

Enables mortise and tenons and dowel joints to be cut with a router. Ideal for cabinet, chair and table construction.

- CNC precision manufactured plates and body.
- One set-up for both mortise and tenon giving perfectly fitting joints.
- Fully adjustable for compound angle joints up to 45°.
- Reversible templates to produce round and square end tenons.
- Templates can be used for accurate dowelling applications.
- Cuts mortise and tenon sizes of 1/4" (6.3mm) to 5/8" (15.9mm).
- Guide bushes are included but cutters are required.
- A Unibase may be required for certain makes and models of router.
- Tenons are cut with a 5/8" (15.9mm) diameter straight cutter (Ref. C026). The width of the tenon is adjusted by using different guide bush diameters.



£236.58

# **MT/JIG/EURO\*** £236.58

\* Metric size jig requires metric cutter set Ref. SET/MT2X8MMTC. This set comprises 6, 8, 10, 12 and 16mm dia. straights. Shank dia



Routing the mortise



Setting-up square tenon



COMPATIBILITY

trend-uk.com/video

VIDEO

TO

Double loose tenon



Dowel joints



### INCLUDES:

6 x Guide bushes
4 x Clamps
1 x Guide bush collar
1 x Set-up bar
1 x Hex key





# SPECIFICATION:

Material thickness min.	12mm
Material thickness max.	47mm
Tenon thickness min.	4.8mm
Tenon thickness max.	16mm
Tenon width max. using	
vertical guide +	90mm
Tenon length max. ++	25mm
Tenon length max. ++ Mortise length max. using	25mm
	25mm 90mm

- on end of 100mm wide material ++ depending on cut length & plunge depth of router.
- +++ unlimited if vertical guide removed and wood repositioned.

# RECOMMENDED

# **VARIABLE SPEED** ROUTER

See page 125 for full details

Product Ref.

**T5** 



### OPTIONAL ACCESSORIES: Product Ref.

Router cutters

A set of 5 long reach straight cutters with diameters of 1/4" to

5/6 Suitable for use with the Mortise & Terion sig.			
1/4" shank	SET/MT1X1/4TC	£66.03	
8mm shank	SET/MT1X8MMTC	£66.03	
1/2" shank	SET/MT1X1/2TC	£67.49	
8mm shanks for metric jigs	SET/MT2X8MMTC	£66.03	

Tenon width	Cutter Ref.	Guide bush dia.
1/4" (6.3mm)	C008	1-1/4" (31.8mm)
5/16" (7.9mm)	C012	1-3/16" (30.2mm)
3/8" (9.5mm)	C015	1-1/8" (28.6mm)
1/2" (12.7mm)	C022	1" (25.4mm)
5/8" (15.9mm)	C026	7/8" (22.2mm)

Other sizes possible, guide bushes shown below not included

with jig.		
3/16" (4.8mm)	C003	1-5/16" (33.3mm)
7/16" (11.1mm)	C018	1-1/16" (27mm)
9/16" (14.3mm)	C024	15/16" (23.8mm)

2. Steel guide bushes (optional)

GB222, GB238, GB27, GB286, GB302, GB318 & GB333 (ea)

£9.14

Universal sub-base

trend

Certain makes and models of router will require a Unibase to accept the guide bushes.

£20.51

4. Dust kit

Magnetic fitting dust kit with 57mmØ (2-1/4") dust spout aperture and 35mm ID adaptor. Accepts 39mm OD

MT/DUSTKIT £36.58











CDJ300 & 600

OVETAIL JIGS

Two accurate and easy to use Dovetail Jigs for a variety of elegant joints.

Two sizes 300mm (12") and 600mm (24").

Cuts 1/2" wide lapped (half blind) dovetails or rebated dovetails in one operation.

- Precision made laser cut zinc plated steel template with packing piece.
- Adjustable offset stops for 600mm jig.
- A Unibase and fine height adjuster may be required for certain makes of router.
- A range of accessory templates are available for small lapped dovetail, box joints and through dovetails.

**CDJ300** £130.49 **CDJ600** £222.79







### SPECIFICATION:

Rating	Craftsman
Dovetail size	12.7mm
Workpiece thickness min.	12mm
Workpiece thickness max.	25mm
CDJ300 workpiece width max.	300mm
CDJ600 workpiece width max.	600mm
Guide bush size	15.8mm
Router base dia. max.	180mm




**INCLUDES:** 1 x 1/4" Shank TCT 104° dovetail cutter

1 x 15.8mm guide bush



CDJ300

trend





Lapped dovetail



Lapped dovetail width 6.35mm
------------------------------

Material thickness	Min. 8mm
	Max 12mm

#### OPTIONAL ACCESSORIES

OF HOMAL ACCESSORIES.	
Product Ref.	Price
Lapped dovetail templates *	
CDJ300/01	£54.91
CDJ600/01	£63.24

Cutter Diameter 6mm x 98°

C154X1/4TC £18.14



Universal sub-base Certain makes and models of routers will require a Unibase to accept the guide

£20.51



Box joint



Box finger width	8mm	12.7mm
Material thickness	Min. 8mm	8mm
	Max 15mm	20mm

Product Ref.	Price
Box joint templates	
CDJ300/03 * (8mm)	£58.35
CDJ300/02 (12.7mm)	£58.35
CDJ600/02 (12.7mm)	£64.85

Cutter for 8mm template Diameter 8mm x 25mm cut

C012AX1/4TC £13.23 Cutter for 12.7mm template Diameter 12.55mm x 25mm cut

- Guide bushes and edge stops included where applicable.
- For heavy duty routers only
- Template size
- M Material thickness



Router and fine height adjuster not included

Through dovetail



Through	dovetail	width	12.7mm

Material thickness	Min. 8mm
	Max. 17mm

Product Ref.	Price
Through dovetail template *	
Templates are dual sided for Pin & Tail. Two cutters are required for each templ (Straight & Dovetail).	ate
CDJ300/05 (12.7mm)	£89.71
Cutters for 12.7mm template	
98° Dovetail cutter	
C178X1/4TC	£19.46
Straight cutter 8mm diameter	
C012AX1/4TC	£13.23
Cutters for 19.1mm template ▲ (disco	ntinued)
97° Dovetail cutter 8mm or 1/2" shank.	
C179	£27.13
Straight cutter 12.7mm dia. 8mm or 1/2	" shank.
C021	£16.67


# STAIRCASE HOUSING JIGS

These template jigs are a well proven means of routing out stair housings quickly and accurately.

# **CLOSED RISER**

- For use with all heavy duty routers with 1/2" shank capacity and over 1600 watts.
- · Constructed from solid laminate.
- Reversible and adjustable angle fence for the exact matching of stair strings.
- Integral reversible and adjustable front clamp.
- Closed riser jig has adjustable nosing and uses dovetail cutters to give a neat joint.








# INCLUDES:

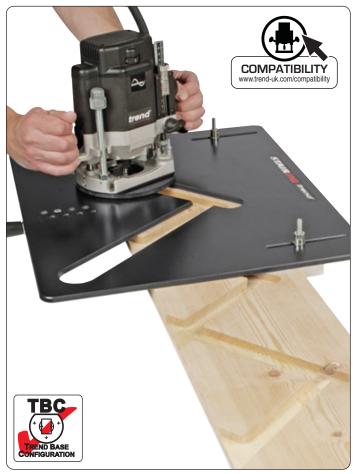- 1 x Sub-base
- 1 x Adjustable reversible clamp
- 1 x Reversible clamp bar
- 1 x Nosepiece
- 1 x Line-up pin & bush
- 2 x Spanners







#### **OPTIONAL ACCESSORIES:**

Product Ref.	Tread Thickness	Cutter Dia.	Price		
Recommended Professional dovetail cutters					
32/10X1/2TC	22mm (7/8")*	14mm	£57.67		
32/11X1/2TC	25.4mm (1")	16mm	£57.67		
32/12X1/2TC	28.5mm (1-1/8")	19mm	£59.81		
32/13X1/2TC	32mm (1-1/4")	22mm	£59.81		


Product Ref.	Tread Thickness	Cutter Dia.	Price
2. Recommended CraftPro dovetail cutters			
C240X1/2TC	22mm (7/8")*	13.5mm	£33.09
C241X1/2TC	25.4mm (1")	16mm	£34.39
C242X1/2TC	28.5mm (1-1/8")	19mm	£35.73
C243X1/2TC	32mm (1-1/4")	22mm	£37.05
* 7/8" tread will have a slight gap under nosing.			



# **OPEN RISER**

- For use with all heavy duty routers with 1/2" shank capacity and over 1600 watts.
- Constructed from solid laminate.
- Reversible and adjustable angle fence for the exact matching of stair strings.
- · Integral reversible and adjustable front clamp.





## INCLUDES:

IIIOLODEO.
1 x Adjustable reversible clamp
1 x Reversible clamp bar
1 x Sub-base
1 x 24mm guide bush
1 x Line-up pin
2 v Spanners

1 x Line up guide bush

**OPTIONAL ACCESSORIES** Product Ref. Tread Thickness Price 1. Recommended Professional straight cutter 4/21X1/2TC 32mm (1-1/4") 15.9mm £48.04 2. Recommended CraftPro Straight cutter C025CX1/2TC 32mm (1-1/4") 15.9mm 3. Carry case CASE/DG





# ROUTABOUT HOLE CUTTER JIG



Special TCT router cutter Unique cutter design with built in depth guiding bearing fitted to shank.



Setting-up

The diameter of the finished access hole will be 250mm. Carefully mark the centre point of the circle, if possible positioning the access hatch between the floor joists. Screw the Routabout jig to the floor using a single No.8 particle board screw at the centre point to act as a pivot.



Routing procedure
With the guide bush and cutter fitted to the router, place onto the template. The depth is automatically set by a top guide bearing attached to the cutter body. Rotate the router around the centre screw in a clockwise direction, cutting to the full depth in a series of shallow steps until the cutter breaks through.



# Completed cut

When cut, the waste piece is supported by the wings of the jig. The stepped cutter automatically cuts a rebated edge on the waste piece as well as around the edge of the hole.



#### End result

Fit the plastic insert ring into the access hole and turn the waste piece over. Drop it into the ring and it will lay flush with the floor surface.



## Access to pipes and cables beneath chipboard floors in seconds. For builders, plumbers and electricians.

- · A 250mm diameter opening can be cut and made good in
- Designed for use in new or existing 18mm and 22mm chipboard or similar floors.
- Cuts only the thickness of the board.
- No waste, the piece cut out is used to make good the floor.
- All you need is a plunge router (750 watts or above). Cutters are offered with 1/4" or 1/2" shank sizes. An 8mm shank cutter is available as an accessory.
- · A Unibase may be required for certain makes and models of router.

Please refer to UK Building Regulations Approved Document B and any amendments before using this product.

# ROUTABOUT KITS

For 18mm thick floors

**RBT/1** £60.47 With 1/4" shank cutter

**RBT/2** £60.47 With 1/2" shank cutter


For 22mm thick floors

**RBT/3** £64.71 With 1/4" shank cutter

**RBT/4** £64.71 With 1/2" shank cutter

REPLACEMENT PARTS:	Product Ref.	Price
Replacement rings for 18mm	thick floors	
Pack of 10	RBTRNG18/10	£46.68
Pack of 100	RBTRNG18/100	£425.94
Pack of 250	RBTRNG18/250	£1,037.92
For 22mm thick floors		
Pack of 10	RBTRNG22/10	£55.17
Pack of 100	RBTRNG22/100	£512.09
Pack of 250	RBTRNG22/250	£1,246.97
2. Replacement cutters for 18mm thick floors		
With 1/4" shank	RBT/CUT/1	£45.92
With 1/2" shank	RBT/CUT/2	£45.92
For 22mm thick floors		
With 1/4" shank	RBT/CUT/3	£49.38
With 1/2" shank	RBT/CUT/4	£49.38
3. Replacement bearing	WP-RBT/CUT/A	£13.23

INCLUDES:
1 x Routabout template
3 x Insert rings
1 x Special TCT router cutter





OPTIONAL ACCESSORIES:	Product Ref.	Price
5. Universal sub-base		
Certain makes and models of routers wil a Unibase to accept the guide bushes.	I require UNIBASE	£20.51
6. Heavy duty 30mm guide bush	GB30	£9.14
	10	
1.		















4. Replacement template

**RBT/PLATE** 

£25.79

# ROUTING TIPS & ADVICE

ROUTING WORKTOPS
ACCURATELY

To get an accurate worktop joint the 30mm diameter guide bush must be positioned so that it is concentric with the 1/2" TCT cutter. If the cutter is not concentric to the guide bush, the finished joint will be poor.

To ensure concentricity for the guide bush for non-Trend 1/2" routers, a universal sub-base Ref. UNIBASE is required. This will fit directly to most routers and is supplied with a line-up pin that is fitted to the router collet to line-up the assembly. The sub-base can then accept Ref. GB30/A guide bush.

# ONLINE KNOWLEDGE

For more routing tips & techniques visit the knowledge section on our website.





Visit www.trend-uk.com/compatibility



TCT worktop cutter.


GB

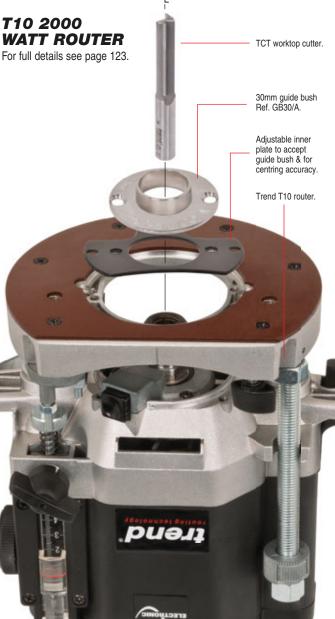
**CENTRING** 

30mm guide bush Ref. GB30/A (see page 183 for details).

UNIBASE to accept guide bush & for centring accuracy.

Non-Trend router.





# KITCHEN WORKTOP JIGS



The most popular tried and tested worktop jigs, designed to enable all 1/2" shank plunge routers to cut precise butt and scribe joints in postform worktops.

# JIG FEATURES:

- Machined from hard wearing solid laminate.
- Will produce a joint in 15 minutes including set-up time.
- Facilities to cut various widths of board and thicknesses up to 42mm.
- Integral panel bolt connector recessing template with easy spanner access.
- Width setting stop for accurate positioning.
- Supplied with clear and comprehensive instructions.

# **JIGS REQUIRE:**

- A portable plunge router with 12.7mm (1/2") shank capacity and minimum 1300 watts.
- A template guide bush with 30mm outside diameter.
- A TCT router cutter with 12.7mm (1/2") dia. and 50mm (2") cut length.
- Two 100mm (4") throat clamps.

# NEW KWJ650 JIG

Tradesman worktop jig for up to 650mm wide worktops.



- A Hard wearing CNC machined Compact Grade High Pressure Laminate 12mm thick jig that cuts both parts of the joint in 15 minutes including setting up.
- Cuts Left hand and right hand corners in up to 40mm thick worktops with or without anti-drip postformed edge.
- Fixed lengths for 600mm, 616mm, 635mm and 650mm wide worktops.
- Two bolt recesses (dog bone style) for 150mm bolts.
- 400mm radius peninsular joint, 35mm kitchen door hole.

KWJ650 £61.75

Size: 880 x 233 x 12mm, weight 3.3kg.





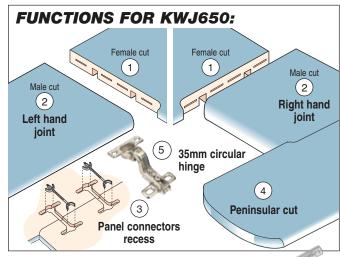




trend-uk.com/video

# **5 FUNCTIONS:**

- 1 Female cut
- 2 Male cut
- 3 Bolt recess
- 4 Curved peninsular
- 5 35mm circular hinge and 3/4" BSP hole



OPTIONAL ACCESSORIES:	Product Ref.	Price
1. Router cutters 12.7mm (1/2") diam	eter.	
a. Professional Rota-tip	RT/11X1/2TC	£74.21
b. Professional	3/83DX1/2TC	£38.36
CraftPro	C153DX1/2TC	£28.58
2. F-clamp (two required)	FC/200	£16.03
3. Recommended 30mm guide bush	1	
A Unibase may be required.	GB30/A	£9.80



COMBI1002
JIG 1000MM

For up to 1000mm wide worktops with cable tidy insert and circular hinge cut apertures.

- A single male and female template in 16mm solid laminate.
- Facility to join boards from 450mm to 1000mm wide.
- Facility to cut 22.5° mitre corners for hob units.
- Integral template slots for rounding and mitring of peninsular worktop corners, for cable tidy inserts and a circular concealed hinge aperture and 3/4" BSP hole for mixer taps.
- Three alloy location bushes and a width-setting stop.
- Colour coded pin location for quick and easy use.
- Four bolt recess slots for connection bolts to allow three bolts in 600mm wide worktop.
- Cuts out of square joints (max. 3°).
- Guide bush and cutter checker.
- Routs 35mm hole for 3/4" BSP mixer tap and two 25mm holes for bridge (bed) mixer tap.

**COMBI1002** + £332.69

Size: 1200 x 376 x 16mm, weight 9.6kg.









- Female cut
- Male cut
- Connector bolt recess
- Curved peninsular
- 45° end cut
- Corner radius
- 22.5° mitre corner joint, cable tidy insert, 35mm circular hinge, and 3/4" BSP hole


# ASSOCIATED PRODUCTS


# CABLE TIDY INSERTS & 35MM CIRCULAR HINGE

trend



# The unique colour-coded system makes the COMBI1002 jig quick and easy to use. Female cut Female cut






Mitre worktop joints for hob units

22.5° mitre corner joint

Panel connector recess

New product

Router, cutter and clamps not included.



OPTIONAL ACCESSORIES:	Product Ref.	Price

1.	Router cutters 12.7mm (1/2") dia	ameter straight.	
a.	Professional Rota-tip	RT/11X1/2TC	£74.21
b.	Professional	3/83DX1/2TC	£38.36
Ξ	CraftPro	C153DX1/2TC	£28.58
2.	Carry case (for COMBI1002)	CASE/1001	£31.36
3.	F-clamp (two required)	FC/200	£16.03
4.	Square edge joint bush 10mm	CJ/SEB/PK	
4.	Recommended 30mm guide bu	sh	

A Unibase may be required.

5. Bolt-on clamps (for COMBI1002 only)

6. Square edge joint bush kit (pair)	CJ/SEB/PK	£26.47
c. Fixing bolt kit (set of 3)	PJ/FBK	£2.72
b. Short clamp (inc. 1 x fixing bolt kit)	PJ/CL/S	£46.64
a. Long clamp (inc. 2 x fixing bolt kit)	PJ/CL/L	£50.60

REPLACEMENT PARTS:	Product Ref.	Price
7. Length stop (for COMBI1002)	CJ/LSK	£19.66
8. <b>Bush 30mmØ</b> (for COMBI1002) 1 off	CJ/BUSH	£10.17
9. 'O' ring set (for bushes, pack of 5)	CJ/ORS	£2.06

To download videos, test reviews, spare parts & instruction manuals visit: www.trend-uk.com/downloads





# KWJ900 JIG

Tradesman ALL IN ONE worktop jig for up to 900mm wide worktops.

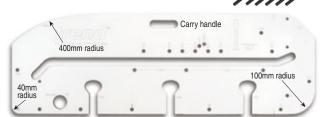
- Hard wearing solid laminate 12mm thick jig that cuts both parts of the joint in 15 minutes including setting up.
- Left hand and right hand corners, 400mm radius peninsular joint, 45° end cut with slight radius, 45° "trade" corner solution for hob units, 100mm radius corner, 40mm radius corner, 35mm kitchen door hole and 3/4" BSP hole for mixer taps.
- Fixed lengths for 400mm, 500mm, 550mm, 600mm, 616mm, 635mm, 650mm, 700mm and 900mm wide worktops. Cuts up to 40mm thick worktops with or without anti-drip postformed edge.
- Three open-ended bolt recesses (dog bone style) for 150mm bolts. Engraved lines for short 65mm bolts and worktop cross-cut. Two recesses for 600mm and three for 900mm worktops.
- 10mm diameter plastic pins with tapered shoulder for tight fit provides three point pin contact to ensure ease of setting up.
- Engraved markings for identification of pin holes.
- Pins made from ABS plastic for strength.

# **KWJ900** £178.19

Size: 1185 x 390 x 12mm, weight 7.7kg.







# 9 FUNCTIONS:

- 1 Female cut
- Male cut

900MM

COMPATIBILITY

- **Connector bolt recess**
- Curved peninsular
- 45° end cut
- R40mm corner radius
- R100mm corner radius
- 45° mitre corner joint
- 35mm circular hinge and 3/4" BSP hole

# RECOMMENDED


# **T10 ROUTER**

T10'S ADJUSTABLE INNER PLATE FOR SUPERIOR ACCURACY


See page 137 for full details.

Router, cutter and

clamps not included.



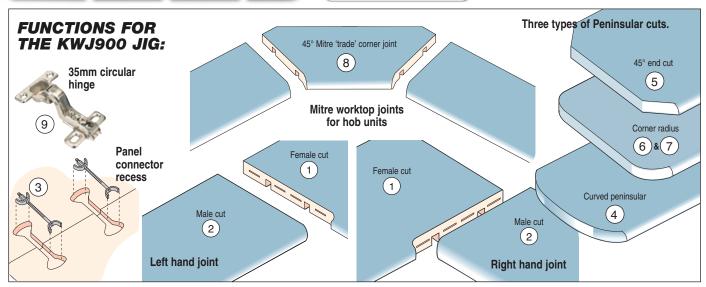Standard guide bush fitting Inner plate centring for accuracy



OPTIONAL ACCESSORIES:	Product Ref.	Price		
Router cutters 12.7mm (1/2") diameter straight x 50mm cut length.				
a. Professional Rota-tip	RT/13X1/2TC	£84.82		
b. Professional	3/83DX1/2TC	£38.36		
CraftPro	C153DX1/2TC	£28.58		
2. Carry case (hard wearing)	CASE/1001	£31.36		
3. F-clamp (two required)	FC/200	£16.03		
Recommended 30mm guide bush     A Unibase maybe required.	GB30/A	£9.80		




# KWJ700S NEW TOOMM MULTI-MATERIAL **WORKTOP JIG**

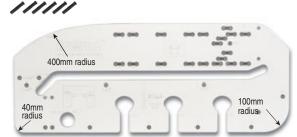Tradesman worktop jig for up to 700mm wide worktops. Suitable for composite, solid wood and square edge worktop as well as standard laminate worktop.

- For square edge and small radius edge worktops to produce a neater joint.
- Use on composite square edge, laminate and solid wood worktops.
- Left hand and right hand corners, 400mm radius peninsular joint, 45° end cut with slight radius, 100mm radius corner, 40mm radius corner, 35mm kitchen door hole and 3/4" BSP hole for mixer taps.
- Hard wearing solid laminate 12mm thick jig that cuts both parts of the joint in 15 minutes including setting up.
- Fixed lengths for 250mm, 300mm, 400mm, 500mm, 550mm, 600mm, 616mm, 635mm, 650mm and 700mm wide worktops. Cuts up to 40mm thick worktops with or without anti-drip postformed edge.
- Three open-ended bolt recesses (dog bone style) for 150 bolts. Engraved lines for short 65mm bolts, and worktop cross-cut. Two recesses for 600mm and three for 700mm worktops.
- Engraved markings for identification of pin holes

# **KWJ700S** £122.57

Size: 985 x 390 x 12mm, weight 5.4kg.



- Pemale cut
- 8 Male cut
- **Connector bolt recess**
- **6** Curved peninsular

- 9 45° mitre corner joint
- 3/4" BSP hole

# 10 FUNCTIONS:

- 10mm & 35mm inset.

- 6 45° end cut
- R40mm corner radius
- 8 R100mm corner radius
- 10 35mm circular hinge and



TO WATCH

# RECOMMENDED

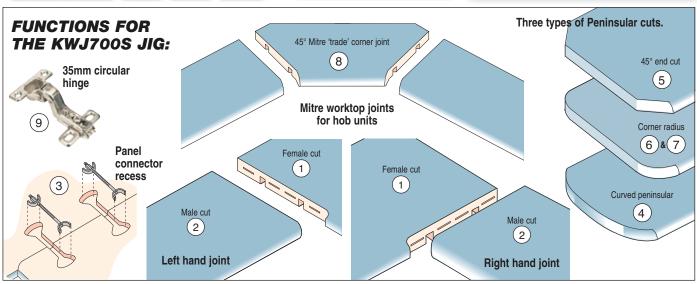
trend

# T10 ROUTER

T10'S ADJUSTABLE INNER PLATE FOR SUPERIOR ACCURACY

See page 137 for full details.





OPTIONAL ACCESSORIES:	Product Ref.	Price
<ol> <li>Router cutters 12.7mm (1/2") diame cut length.</li> </ol>	eter straight x 50n	nm
a. Professional Rota-tip	RT/13X1/2TC	£84.82
b. Professional	3/83DX1/2TC	£38.36
CraftPro	C153DX1/2TC	£28.58
2. Carry case (hard wearing)	CASE/1001	£31.36
3. F-clamp (two required)	FC/200	£16.03
4. Recommended 30mm guide bush		
A Unibase maybe required.	GB30/A	£9.80





# KWJ700 JIG TOOMM

Tradesman worktop jig for up to 700mm wide worktops.

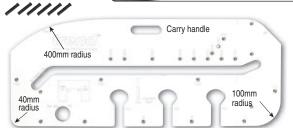
- Hard wearing solid laminate 12mm thick jig that cuts both parts of the joint in 15 minutes including setting up.
- Left hand and right hand corners, 400mm radius peninsular joint, 45° end cut with slight radius, 100mm radius corner, 40mm radius corner, 35mm kitchen door hole and 3/4" BSP hole for mixer taps.
- Fixed lengths for 250mm, 300mm, 400mm, 500mm, 550mm, 600mm, 616mm, 635mm, 650mm and 700mm wide worktops. Cuts up to 40mm thick worktops with or without anti-drip postformed edge.
- Three open-ended bolt recesses (dog bone style) for 150mm bolts.
   Engraved lines for short 65mm bolts, and worktop cross-cut. Two recesses for 600mm and three for 700mm worktops.
- 10mm diameter plastic pins with tapered shoulder for tight fit provides three point pin contact to ensure ease of setting up.
- · Engraved markings for identification of pin holes.
- Pins made from ABS plastic for strength.

# **KWJ700** £109.18

Size: 985 x 390 x 12mm, weight 5.4kg.









COMPATIBILITY

www.trend-uk.com/compatibility

- 1 Female cut
- Male cut
- Connector bolt recess
- 4 Curved peninsular
- 5 45° end cut
- 6 R40mm corner radius
- R100mm corner radius
- 8 45° mitre corner joint
- 9 35mm circular hinge and 3/4" BSP hole

## RECOMMENDED

trend

# T10 ROUTER

Router, cutter and

clamps not included.

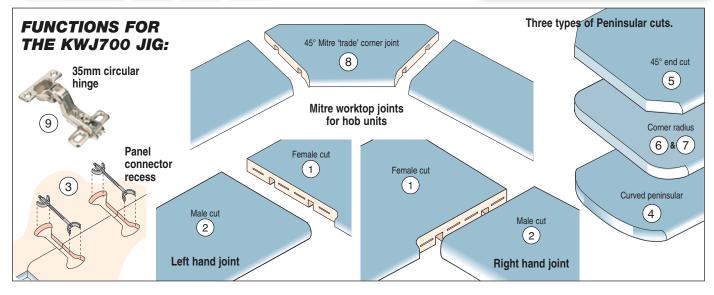
T10'S ADJUSTABLE INNER PLATE FOR SUPERIOR ACCURACY

See page 137 for full details.



Standard guide bush fitting


Inner plate centring for accuracy



OPTIONAL ACCESSORIES:	Product Ref.	Price			
Router cutters 12.7mm (1/2") diameter straight x 50mm cut length.					
a. Professional Rota-tip	RT/13X1/2TC	£84.82			
b. Professional	3/83DX1/2TC	£38.36			
CraftPro	C153DX1/2TC	£28.58			
2. Carry case (hard wearing)	CASE/1001	£31.36			
3. F-clamp (two required)	FC/200	£16.03			
4. Recommended 30mm guide bus	h				
A Unibase maybe required.	GB30/A	£9.80			



# **WORKTOP JIG ACCESSORIES**

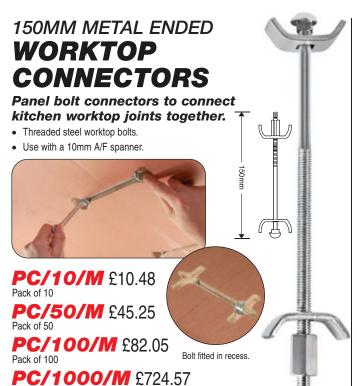

# **WOODEN BISCUITS**

Biscuit jointing has proven to be one of the strongest, fastest, safest and most accurate ways to join hardwoods and softwoods, plywood, composition

Compared to dowelling, biscuit jointing is faster and more precise. The biscuits are made of die-cut beech which expands when in contact with a

woodworking adhesive eg. PVA glue.

For board thickness 8 - 12mm Size: 47.5 x 15.5 x 4.0mm

**BSC/0/100** (atv 100) £7.81 BSC/0/1000 (qty 1000) £31.74

For board thickness 13 - 18mm Size: 53 x 19 x 4.0mm

BSC/10/100 (qty 100) \_£7.81 BSC/10/1000 (atv 1000)£33.09

For board thickness 19mm+ Size: 60 x 23 x 4.0mm

**BSC/20/100** (qty 100) \_£7.81 BSC/20/1000 (qty 1000)£34.39

Qty No.0 x 30, No.10 x 30 & No.20 x 40 **BSC/MIX/100** (qty 100) £7.81

Qty No.0 x 250, No.10 x 250 & No.20 x 500 BSC/MIX/1000(qty 1000)£33.09

For certified biscuits see our website

# **QUICK FIT**

Pack of 1000

# ZIPBOLT WORKTOP **CONNECTORS**

Quick tightening 170mm connector bolts for kitchen worktop joints.

- Use with 5mm hex driver for tensioning.
- Suits standard worktop jig bolt recess.
- Bolt balances on hex driver.
- · Strong and powerful zinc plated metal bolts.
- Diecast gear housing is more durable and is able to achieve even higher torque levels.
- Saves time and money in assembling worktops and panels.
- Makes job easier for the installer.

**ZIP/170/3** £9.39

Pack of 3 with 5mm hex bit

**ZIP/170/25** £65.33

Pack of 25

**ZIP/170/50** £124.73

Pack of 50



# KITCHEN WORKTOP JIGS


See pages 158-162 for full details.






SPARE PART: Product Ref. Price SNAP/HEX/5MM £4.15 5mm hex bit

# **HOW IT WORKS:**






Fit Zipbolt to hex rachet bit in ratchet screwdriver or torque screwdriver drill and place in worktop recess.



Hex bit engages in recess in diecast housing, to drive internal gears.



Turn hex bit to tighten Zipbolt and to tighten joint.



Bolt fitted into recess

# **BISCUIT JOINTING CUTTERS TC TIPPED**

4mm wide Tungsten Carbide Tipped grooving cutters with bearing guide to rout grooves for biscuits. Give extra stability to worktop joint.

342X1/2TC £65.36 C152X1/2TC £41.69



### **BISCUITS NO.20**

Glue into 4mm routed groove to increase joint stability.

BSC/20/100 (qty 100) £7.81 BSC/20/1000 (qty 1000) £34.39



# RECOMMENDED **30MM GUIDE BUSH**

- · Euro style precision steel.
- To guide the router when using a template.
- A Unibase may be required for certain makes and models of router.

GB30/A (10mm spigot) £9.80



# **UNIVERSAL SUB-BASE**

For obtaining concentricity of the cutter relative to the guide bush. Fits the bases of most heavy duty routers. See page 182 for further details.









### F CLAMPS

Quick action gripper clamps with 100mm throat. Durable steel construction with removable jaws.

FC/200 (200mm jaw) £16.03



## WORKTOP SCRIBER

Gives offset between worktop jig and guide bush for easy setting up.

- · Allows true cutter path to be drawn.
- · Scribes directly onto worktop.
- Offset for 30mm guide bush and 1/2" router cutter.



Design Reg. 3014615









# TWO FLUTE CUTTERS TC TIPPED

12.7mm (1/2") diameter x 50mm cut straight TCT router cutters. 3/83DX1/2TC £38.36 3/83MX1/2TC (short shank) £38.36 C153DX1/2TC £28.58

# REPLACEABLE TIP CUTTERS

12.7mm (1/2") diameter replaceable tip cutters for COMBI Jigs.

RT/11X1/2TC £74.21

RT/11MX1/2TC (short shank) £74.21

RB/A (blade for RT/11) See page 15 for price.

12.7mm (1/2") diameter replaceable tip cutter for KWJ700 & KWJ900.

RT/13X1/2TC £84.82

RB/H (blade for RT/13) See page 15 for price.

### **WORKTOP JIG CARRY CASES**

Hardwearing carry cases for worktop jigs. Padded interior with hook & loop secured flap and webbing carry strap.

	To suit Trend Jigs	Length mm	Height mm	Price
CASE/1001	COMBI1001 COMBI1002 KWJ700 KWJ700S KWJ900	1250	415	£31.36



# SPECIALIST WORKTOP JIGS

A range of popular specialist jigs designed to rout apertures in worktops, corner radii, hot rods grooves, belfast/butler sink apertures and drainer grooves with a variety of templates and accessories to complete the job quickly, accurately and to a high standard.

# APERTURE & RADIUS JIG

For routing apertures, recesses and radii in kitchen worktops to fit a range of sinks, hobs and to suit curved cabinets.

- Made from machined solid phenolic.
- Cuts both internal and external radius with the use of pins or engraved sight lines.
- 90° angle and straight slot to allow for a hob or sink aperture to be routed.

Straight slot for cuts up to 830mm long.

- Radius curves at 40mm, 60mm, 80mm, 100mm, 150mm and 250mm.
- External radii of 50mm, 100mm and 200mm.
- 45° end cut, plus 26mm and 35mm cabinet door hinge recess facility.

# **AR/JIG** £106.09

Size: 1000 x 390 x 12mm, weight 4.6kg.











Radius corner






INCLUDES:
4 x Pins

REPLACEMENT PART:	Product Ref.	Price
1. Pins 10mmØ (4 pack)	KWJ/PIN/4	£7.37
ACCESSORIES:	Product Ref.	Price
2. TCT Router cutters		
Professional	3/83DX1/2TC	£38.36
CraftPro	C153DX1/2TC	£28.58
3. Guide bush 30mm	GB30/A	£9.80
4. F-clamps (2 required)	FC/200	£16.03



Cuts circular hinge holes 26mmØ & 35mmØ

40mm radius	50mm radius	60mm radius	80mm radius
100mm radius	150mm radius	250mm radius	45° corner







# HOT ROD JIG

For routing grooves in solid worktops to accept hot rods for prevention of heat damage to work surface.

- Made from durable 12mm thick phenolic.
- · CNC machined for accuracy.
- Accepts hot rods of lengths 100mm, 200mm, 300mm and 400mm.
- · Grooves at 50mm pitch.
- Pin holes at 50mm increments to allow recess at either 90° or 45° to worktop edges.
- · Rods are not included.

HR/JIG £65.78

Size: 700 x 390 x 12mm, weight 3.5kg.







# STAINLESS STEEL **HOT RODS**

12mmØ brushed stainless steel hot rods for use in timber worktops to protect surfaces from the heat.

- 12mm diameter with rounded ends.
- Four lengths available 100mm, 200mm, 300mm and 400mm.
- For use with the Trend Hot Rod Jig.
- For use in solid timber and solid surface worktops.
- · Sold in singles.

HR/100 £13.74


100mm long HR/200 £16.45

200mm long HR/300 £19.04

300mm long

HR/400 £21.75

400mm long








Solid surface

Diamond style in solid timber.

ACCESSORIES & SPARES: Product Ref. Price

1.	TCT Router cutters		
	R6mm (12mmØ rods)	C053CX1/2TC	£29.69
	R6.35mm (12.7mmØ rods)	C054AX1/2TC	£30.75
2.	Pins 10mmØ (4 pack)	KWJ/PIN/4	£7.37
3.	Guide bush 30mm	GB30/A	£9.80
4.	F-clamps (2 required)	FC/200	£16.03





INCLUDES:

4 x Pins

# BELFAST SINK JIG





Product Ref. Price

### **INCLUDES:** 6 x Plastic pins

Maximum sink width 1050mm Sink depth 440mm to 515mm Corner radius 25mm

SPECIFICATION:





OPTIONAL ACCESSORIES:	Product Ref.	Price
1. Straight TCT cutters		
Professional 12.7mmØ	3/83DX1/2TC	£38.36
Professional (short shank)	3/83MX1/2TC	£38.36
CraftPro 12.7mmØ	C153DX1/2TC	£28.58
2. Radius TCT cutter		
R2.5mm for water drip channel	C051AX1/2TC	£25.79
3. Guide bushes		
30mm	GB30/A	£9.80
16mm for water drip	GB16	£9.14
4. Universal sub-base		
Certain makes and models of ro	uter will require a l	Jnibase
to accept the guide bushes.	UNIBASE	£20.51
5. Carry case	CASE/DG	£34.10

Router, cutter & clamps not included.

Pins 10mmØ (4 pack)	BSJ/PIN/4	£9.25
1111		
1.		8
	2. 22.	
3.		
5.		
		1
4		6
	100	
The state of the s		end.

REPLACEMENT PART:



# DRAINER GROOVE PRO JIG FRAME Patent No. GB1718517.4 An X and Y-axis routing jig that allows different drainer grooves to be routed in solid timber and solid surface worktops when used with accessory inner plates. • Outer frame has 0.5° degree fall. • X and Y-axis ski and carriage allows forward & back and side to side movement to allow surfacing for recessed draining board design. • Router carriage has hole to accept 30mm guide bush and can be locked to allow parallel groove routing for standard drainer grooves. Made from 12mm thick hard-wearing machined high pressure laminate. • Use with a router with 30mm guide bush fitted and suitable cutter. Five accessory inner plates available to give various groove effects, straight slot, straight fan, curved fan, lightning fan and hot rod. Router carriage can also be used for surfacing applications. Outer frame has index holes at 50mm centres to restrict length of slots and includes two index pins. **DG/PRO** £232.34 COMPATIBILITY Size: 600 x 600 x 12mm, weight 4kg. VIDEO **INCLUDES:** 1 x Outer frame 1 x Ski carriage 2 x Index pins

#### 30mm Taper Recess

415mm

447mm

DRAINER GROOVE PRO ACCESSORY INNER PLATES Sold separately. Router carriage not used when inner templates are fitted.

trend-uk.com/vid

447mm x 415mm

0.5°

447mm




SPECIFICATION:

Groove length

Router carriage ski working area

Fall





415mm

447mm





Taper Recess

Hot Rod (100mm, 200mm, 300mm, 400mm)

OPTIONAL TEMPLATES:	Product Ref.	Price
Straight slot inner plate	DGP/IP/SS	£74.16
2. Straight fan inner plate	DGP/IP/SF	£74.16
3. Curved fan inner plate	DGP/IP/CF	£74.16
4 Lightning fan inner plate*	DGP/IP/I F	£74 16

Straight slot inner plate	DGP/IP/SS	£74.16
Straight fan inner plate	DGP/IP/SF	£74.16
Curved fan inner plate	DGP/IP/CF	£74.16
Lightning fan inner plate*	DGP/IP/LF	£74.16
Hot rod inner plate	DGP/IP/HR	£74.16
Requires 20mm guide bush.		

OPTIONAL ACCESSORIES:	Product
Drain groove cove cutter	OOFCAVA
6. R9.5mm	C056AX1
Hot rod cove cutter	
7. R6mm (12mmØ hot rods)	C053CX1
8. R6.35mm (12.7mmØ hot rods)	C054AX1

	Product Ref.	Price
9. Two flute cutter 19mmØ	C030BX1/2TC	£37.05
Guide bushes		
10. 30mm	GB30	£9.14
11. 20mm	GB20	£9.14
12. F Clamps	FC/200	£16.03
13. Carry case	CASE/DG	£34.10









Price

£34.14 £29.69

£30.75



5. **ŀ** 


# **DRAINING GROOVE JIG**

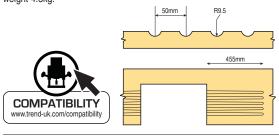For routing draining grooves in solid timber and Corian® for Belfast type sinks.

- Made from 12mm hardwearing CNC machined phenolic.
- Provides a 0.5° fall.
- Grooves at 50mm pitch and 455mm long.
- Sight marks for lining up.
- Three removable sloping runners for support.
- Cutter diameter check hole.
- Fixing holes for user-made stops for repetition work.

# **DG/JIG** £134.73

Size: 625 x 585 x 12mm, weight 4.3kg.



# **HEAVY DUTY GRIPPER CLAMPS** See page 210 for full details.

Product Ref.

Price

Product Ref. FC/200

FC/300 FC/500

**REPLACEMENT PARTS:** 



IN	n		ᇟ	c.
ш	IUL	.u	DE	<b>5</b> :

1 x 30mm Guide bush		
1 x 1/2" shank TCT 9.5mm		
radius cove cutter		



SPECIFICA	TION:
Fall	
0 11	

Fall	0.5°
Groove pitch	50mm
Groove length	455mm
Slat width	19mm

1. R9.5mm cove cutter	C056AX1/2TC	£34.14
2. Guide bush 30mm diameter	GB30	£9.14
OPTIONAL ACCESSORIES:	Product Ref.	Price
3. Cove cutter		
R6.35mm for narrower groove.	C054AX1/2TC	£30.75
4. Carry case	CASE/DG	£34.10



# **CABINET DOOR HINGE TEMPLATE**

For use with a plunge router to cut 26mm and 35mm diameter blind holes for circular cabinet door hinges.

- Cuts accurate recesses for either 26mm or 35mm circular hinges.
- Use with a 12.7mm (1/2") diameter router cutter and 30mm guide bush.
- Adjustable and removable alloy end stop for adjustment of recess position from top and bottom of door (normal position 100mm).
- 3mm and 5mm offset location holes to accurately position the recesses relative to the edge of the door.
- Made from hard wearing 12mm thick high pressure laminate with engraved centre sight lines.
- Pin holes reversible for left hand or right hand doors.

# **TEMP/CDH/A** £57.29

Size: 355 x 220 x 12mm, weight 1.2kg.





ACCESSORIES:	Product Ref.	Price
2. Professional router cutte	r 3/83DX1/2TC	£38.36
3. Guide bush 30mm diame	eter GB30	£9.14
4. F-clamps (2 required)	FC/200	£16.03
3. Guide bush 30mm diame	eter GB30	£9.





Recess position ran	ge from top/
bottom of door.	
Ø 26mm	50 - 105mm
Ø 35mm	50 - 190mm
Offcot from odgo	2mm or 5mm

SPECIFICATION:



# **CONTRACTOR**

# TWO PART SKELETON HINGE JIG

Made from aluminium extrusion for strength and light weight for easy transport. To recess hinges in wooden doors and frames. Clean and accurate recesses are achieved every time with minimal set-up time, both on-site and in joinery shops.

- Fully adjustable quick release aperture blocks.
- Adjustable edge guides with three preset hinge widths.
- Suitable for timber based doors and square butt hinges.
   No need for marking out in conventional way.
- Use with a light duty router with 1/4" collet and long reach router cutter 12mm dia. x 70mm overall length.
- Jig thickness allows it to be used on frames with a maximum 25mm thick fixed stop fitted.
- Can be used to fit new door in an old frame.
   Ideal for renovation work.

**H/JIG/C** (two piece) £267.35

# FEATURES:

- With fully adjustable quick release apertures.
- Fully adjustable hinge recesses.
- Can be used on max. 25mm thick fixed stops.
- · Also suitable for fire doors.
- Adjustable stops plus three preset stop positions for 20mm, 25mm & 30mm hinge leaf.



Adjustable stops plus three preset stop positions for 20mm, 25mm & 30mm hinge leaf.





**COMPATIBILITY** 

trend-uk.com/video

Large pivot plate

2mm guide bush offset built in making hinge length setting



3 x Aperture block assemblies 4 x Bradawls (short blade)

1 x 16mmØ guide bush
1 x Fabric storage case



### SPECIFICATION:

 Weight
 2.9kg

 Hinge sizes possible
 Length min.

 Length max.
 5" (127mm)

 Width min.
 1/2" (12.7mm)

 Width max.
 1-3/8" (35mm)

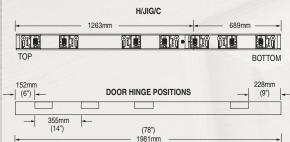
ero trend

# Door sizes possible

	Height min.	6' 5" (1956mm)
	Height max.	6' 10" (2100mm)*
	Thickness min.	5/8" (16mm)
	Thickness max.	2" (51mm)

\* Please note for doors over 2040mm the bottom hinge will be higher than 9" up.

# TECHNICAL DIAGRAM:



REPLACEMENT PARTS:		Product Ret.	Price	
1.	Special guide bush	GB160	£11.92	
2.	Bradawl	WP-HJ/09B	£5.42	
3.	Fabric carry case	CASE/HJ/C	£22.23	



OPTIONAL ACCESSORIES:	Product Ref.	Price
Universal sub-base	UNIBASE	£20.51
Professional 12mmØ long reach cutter	3/8LX1/4TC	£30.30
CraftPro 12mmØ long reach cutter	C019AX1/4TC	£20.25
T4 quide hush 16mmØ x 10mm	GB/T4/160	£11 92



Certain makes & models of router including the T4 will require a Unibase to accept the guide bushes. The T4 alternatively can use Ref. GB/T4/160 guide bush









# CONTRACTOR

# HINGE JIG

Contractor hinge jig with adjustable apertures to recess hinges in wooden doors and frames. Constructed from aluminium extrusion, it is easy to use with minimal setting-up time, completing the job both accurately and quickly. Single piece and two piece available.

- Use on-site and in joinery shops to increase productivity with excellent results.
- Four apertures for fire door requirements.
- No need for marking out in the conventional way.
- Quick and simple to set-up as the hinge is used as the pattern.
- Clean and accurate recesses are achieved every time.
- Suitable for timber based doors and square butt hinges.
- Use with a light duty router with 1/4" collet.
- Long reach router cutter required, 12mm diameter with 70mm overall length.
- Angled position slots to prevent edge guide creep.
- Jig thickness allows it to be used on frames with a maximum 25mm thick fixed stop fitted.

**HINGE/JIG** (single piece) £263.10 **H/JIG/A** (two piece) £267.35



Setting the length using hinge



Setting the width



Setting the depth



Routing hinge recesses



Fitting the door



#### **TECHNICAL DIAGRAM:**

<b>HINGE/JIG</b> 1955mm	-	ı
		ı
TOP	воттом	1
H/JIG/A		-
<del> </del>	-	t
TOP	BOTTOM	
152mm	228mm   (9")	
355mm		

### **FEATURES:**

- · With adjustable apertures.
- · Fully adjustable bottom hinge recess
- · Can be used on max. 25mm thick fixed stops.
- Also suitable for fire doors.

### INCLUDES:

IIIOEODEO.
4 x Apertures
2 x Bradawls with spacer
1 x 16mm guide bush
1 x T-handle hex key
1 x 4mm spacing gauge

1 x Plastic storage tube with HINGE/JIG Poor sizes possible 1 x Fabric storage case with H/JIG/A



# SPECIFICATION:

Hinge sizes possible

Length min.	2-5/8" (67mm)
Length max.	5" (127mm)
Width min.	3/8" (9.5mm)
Width max.	1-3/8" (35mm)

Door sizes possible		
Height min.	6' 5" (1955mm)	
Height max.	6' 10" (2100mm)*	
Thickness min.	5/8" (16mm)	
Thickness max.	2" (51mm)	

\* Please note for doors over 2040mm the bottom hinge will be higher than 9" up.

REPLACEINIENT PARTS.	Floudel nel. Flice	
Special guide bush (dia. 16mm x 10mm)	GB160	£11.92
2. Bradawl (requires spacer)	WP-HJ/09	£5.47
3. Nylon spacer for bradawl (1 off)	WP-HJ/08	£1.84
4. 4mm feeler gauge (1 off)	WP-HJ/10	£3.17
5. Aperture block (1 off)	WP-HJ/02	£7.28
6. T-handle hex key (1 off)	WP-AKT/01	£6.36
7. Plastic storage tube (for HINGE/JIG)	CASE/HJ	£19.46
8. Fabric carry case (for H/JIG/A)	CASE/HJ/A	£22.23

COMPATIBILITY

Product Ref Price





router cutter Ref. TR20DX1/4TC & guide bush Ref **GB240** 

VIDEO

end-uk.com/video

DEDI ACEMENT DADTO




# TRADE HINGE JIG

Trade two piece hinge jig with adjustable apertures to recess hinges in doors and frames with a portable router. Constructed from 12mm phenolic plastic material.

- Two part jig with adjustable apertures for different hinge lengths.
- Quick and easy to set-up as the hinge is used as the pattern.
- Clean and accurate recesses are achieved every time.
- Hard wearing 12mm thick phenolic plastic.
- One setting for door and frame. No need to adjust for repeated doors.
- Suitable for internal timber based doors and frames, with separate stops or maximum 11mm stop.
- Requires a 1/4" collet portable plunge router.
- Includes hex key, guide bush, bradawls and carry case.

**H/JIG/B** (two piece) £222.79



H/JIG/B

### FEATURES:

- · With adjustable apertures.
- For separate or 11mm thick fixed stops.
- Also suitable for fire doors and frames with separate stops.



# CORNER CHISEL

For squaring hinge & lock faceplate recesses.

- · High Speed Steel anvil for long life.
- Locates in the rounded corner of the routed recess.
- · One square blow with a hammer to square corners.
- Can be used with Trend Hinge Jig & Lock Jigs.

**C/CHISEL** £15.76



Product Ref.

UNIBASE





### **INCLUDES:**

- 1 x T-handle hex key
- 3 x Bradawls with spacers
- 1 x 16mm guided bush

# 1 x Fabric carry case



### SPECIFICATION:

#### Hinge sizes possible

Length min.	2" (50mm)
Length max.	5" (127mm)
Width min.	3/8" (9.5mm)
Width max.	1-3/8" (35mm)

#### Door sizes possible

Door sizes possible	
Height min.	6' 5" (1955mm)
Height max.	6' 10" (2100mm)*
Thickness min.	5/8" (16mm)
Thickness max	2" (51mm)

\* Please note for doors over 2000mm the bottom hinge will be higher than 9" up.

# OPTIONAL ACCESSORIES: Universal sub-base

2. Professional 12mmØ long reach cutter 3/8LX1/4TC £30.30 CraftPro 12mmØ long reach cutter C019AX1/4TC £20.25 GB/T4/160 £11.92 3. T4 guide bush 16mmØ x 10mm

Low profile architrave bush kit
 Pair of 3mm thick bushes so jig can be used where architrave is fitted 4mm back from lining.



Certain makes & models of router including the T4 will require a Unibase to accept the guide bushes. The T4 alternatively can use Ref. GB/T4/160 guide bush.



Price

£20.51

# ROUTER **CUTTERS**

Shank mounted leading edge, to stop door jamb. See page 77 for full

Product Refs. C214 C214A

# CONTRACTOR

# LOCK JIG

This jig uses a set of interchangeable templates and a router to cut the mortise and faceplate recess for popular door

- For most common sash mortise and dead locks, with up to 2-3/4" or 70mm deep mortises and a 7/8" or 1" faceplate. Deeper mortises can be achieved with a suitable size of auger bit.
- Fast, clean and accurate results on doors 34mm to 58mm thick, even in hardwood.
- Precision manufactured plates and body.
- The jig requires a plunge router with a 80mm plunge, fitted with a 30mm guide bush and 12mm diameter long reach cutter.


**LOCK/JIG** £112.46





INCLUDES:





#### **TEMPLATES INCLUDED:**

Faceplate	Dimensions:
-----------	-------------

Metric	Imperial (approx.)	Template
22.2 x 156mm	7/8" x 6-1/8"	1
22.5 x 152.5mm	7/8" x 6"	2
25.4 x 121mm	1" x 4-3/4"	3
25.4 x 127.5mm	1" x 5"	4
25.4 x 133.5mm	1" x 5-1/4"	5
25.4 x 145mm	1" x 5-3/4"	6
25.4 x 153mm	1" x 6"	7
25.4 x 156.5mm	1" x 6-1/8"	8
25.4 x 165.5mm	1" x 6-1/2"	9
25.4 x 177mm	1" x 7"	10
25 x 57.5mm	1" x 2-1/4"	11 UPPER
26 x 56.5mm	1" x 2-1/4"	11 LOWER
25.6 x 162mm	1" x 6-3/8"	12

#### Mortise Lock Dimensions:

Imperial (approx.)	Template
5/8" x 2-7/8"	Α
5/8" x 4-1/4"	В
3/4" x 3"	С
3/4" x 4-1/4"	D
	5/8" x 2-7/8" 5/8" x 4-1/4" 3/4" x 3"

\* These are maximum mortise lock case (body) lengths, unless radius ends are squared with a chisel. Actual length of mortise is 7mm longer. Smaller mortise locks can be accommodated depending on position of their fixing screws.

SPARE TEMPLATES:	Product Ref.	Price
Size 16mm x 72mm mortise	WP-LOCK/T/A	£7.57
Size 16mm x 107mm mortise	WP-LOCK/T/B	£7.57
Size 19mm x 78mm mortise	WP-LOCK/T/C	£7.57
Size 19mm x 109mm mortise	WP-LOCK/T/D	£7.57
Size 22.2mm x 152.5mm faceplate	WP-LOCK/T/2	£9.39
Size 22.2mm x 156mm faceplate	WP-LOCK/T/1	£7.57
Size 25.4mm x 121mm faceplate	WP-LOCK/T/3	£7.57
Size 25.4mm x 128mm faceplate	WP-LOCK/T/4	£7.57
Size 25.4mm x 133.5mm faceplate	WP-LOCK/T/5	£7.57
Size 25.4mm x 145mm faceplate	WP-LOCK/T/6	£7.57
Size 25.4mm x 153mm faceplate	WP-LOCK/T/7	£7.57
Size 25.4mm x 156mm faceplate	WP-LOCK/T/8	£7.57
Size 25.4mm x 165.5mm faceplate	WP-LOCK/T/9	£9.39
Size 25.4mm x 177mm faceplate	WP-LOCK/T/10	£7.57
Size 26 x 56.5mm & 25 x 57.5mm faceplate	WP-LOCK/T/11	£7.57
Size 26mm x 162mm faceplate	WP-LOCK/T/12	£7.57

ACCESSORY TEMPLATES:	Product Ref.	Price
Size 16mm x 90mm mortise	WP-LOCK/T/E	£8.35
Size 19mm x 25mm template	WP-LOCK/T/152	£15.24
Size 22mm x 95.5mm faceplate	WP-LOCK/T/13	£8.35
Size 22.2mm x 155mm faceplate	WP-LOCK/T/190	£15.24
Size 24mmØ circle template	WP-LOCK/T/200	£15.24
Size 24mmØ x 2 template	WP-LOCK/T/201	£15.24
Size 24x57mm faceplate 19x41mm mortise	WP-LOCK/T/G	£8.35
Size 25mm x 51mm Perko® R2 rectangle	WP-LOCK/T/14	£15.24
Size 25mm x 60mm faceplate	WP-LOCK/T/19	£11.92
Size 25.1mm x 57mm ERA® latch template	WP-LOCK/T/15	£8.35
Size 25.6mm x 60.2mm faceplate	WP-LOCK/T/18	£8.87
Size 25.6mm x 153mm radiused end	WP-LOCK/T/17	£8.35
Size 26mm x 110mm faceplate	WP-LOCK/T/16	£8.35

### LOCK JIG & LARGE LOCK JIG SPARES & OPTIONAL ACCESSORIES: Product Ref.

#### 1. Template set

Pack of 16 as supplied in standard Lock Jig. Comprises: faceplate templates 1-12 & mortise templates A-D.

WP-LOCK/T/SET £89.41

Price

trend-uk.com/video

#### 2. Line-up template Allows jig to be centred more accurately on door.

Included with LOCK/JIG.	WP-LOCK/T/	LUP £10.31
3. Guide bushes		
Standard 30mm	GB30	£9.14
Special 16mm	GB160	£11.92

#### 4. Guide bush collar

Fits to GB160 as supplied with the Trend Hinge Jig to give 30mm OD. Secures to bush with integral ring.

	GB/COLL/1030	17.02
Universal sub-base	UNIBASE	£20.51

#### 6. Recommended 1/2" shank cutters

12mmØ x 115mm overall length. For up to 70mm deep mortise depending on plunge of router & use of Unibase etc.

Professional	3/75X1/2TC	£45.25
CraftPro	C172DX1/2TC	£29.95

### 7. Recommended 1/4" shank cutters

 $12\text{mm} \varnothing \ x \ 70\text{mm}$  overall length. Deepening of mortise with auger bit required.

Professional	3/8LX1/4TC	£30.30
CraftPro	C019AX1/4TC	£20.25






Certain makes & models of router will require a Unibase to accept the guide







Other templates available visit: www.trend-uk.com

# FULLY ADJUSTABLE TRADE

# LOCK JIG

For precision fitting of locks into doors. For lock faceplates of lengths up to 250mm.

· Quick and easy to set-up as jig has engraved markings on underside to allow set-up for doors 35mm, 40mm, 44mm and 54mm thick.

- Length of the aperture in the jig can be adjusted from 30mm to 250mm.
- Engraved for 16mm and 19mm lock widths and 22.5mm and 25.4mm faceplate widths.
- Made from 12mm thick laminate with sliding phenolic plastic plates.
- Adjustable datum locking alloy clamping bar with clamping range from 30mm to 80mm.
- Can be used for routing the mortise for 16mm and 19mm lock bodies.

The jig requires a plunge router with an 80mm plunge fitted with a 30mm guide bush with 10mm long spigot, 12mm diameter long reach cutter and two clamps.

**LOCK/JIG/B** £106.09

Size: 490mm x 409mm

#### INCLUDES:

- 1 x Datum clamp bar 1 x Sliding plate
- 2 x Setting blocks



RECOMMENDED CUTTERS:	Product Ref.	Price
For faceplate or mortise		
Professional 12mmØ router cutter	3/75X1/2TC	£45.25
CraftPro 12mmØ router cutter	C172DX1/2TC	£25.79
445 to 70	and a survey of the state of	and and an

115mm overall length. For up to 70mm deep mortise dependant on plunge of router and use of Unibase etc.

For faceplate	Product Ref.	Price
Professional 12mmØ router cutter	3/8LX1/4TC	£30.30
CraftPro 12mmØ router cutter	C019AX1/4TC	£20.25

70mm overall length. For mortise, deepening of mortise with auger





VIDEO

www.trend-uk.com/compatibility



Certain makes and models of router will require a Unibase to



Engraved on top for lock width & on underside to allow set-up for 35mm, 40mm, 44mm & 54mm door widths.

Setting gauge for doors to centre

jig & set widths.





This jig allows euro cylinder locks to be routed in doors. • Routs out recess to suit Euro lock cylinder barrel size 33mm x 17mm/10mm.

• Sliding plate allows handle pitch to lock body adjustment from 45mm to 115mm.

• Jig is designed to give a 1mm clearance around the lock barrel.

• Allows 16mm diameter hole for handle spindle to be routed.

- Holes for use with Trend Snappy drill bit guide for marking handle lock plate at 40mm centres.
- Made from 12mm thick High Pressure Laminate for longer life.
- Reversible design with 57mm and 44mm backset.
- · Accessory sliding plates available for small oval and large oval bar
- Requires 12mm cutter and 20mm guide bush.

# **ECL/JIG** £90.18

Size: 490mm x 409mm

## INCLUDES:

1 x Euro Lock sliding plate

2 x Edge guides

R	ECOMMENDED CUTTERS:	Product Ref.	Price
1.	1/2" Shank cutters		
Π	Professional 12mmØ router cutter	3/75X1/2TC	£45.25
Ξ	CraftPro 12mmØ router cutter	C172DX1/2TC	£25.79
2.	1/4" Shank cutters	Product Ref.	Price
	Professional 12mmØ router cutter	3/8LX1/4TC	£30.30
	CraftPro 12mmØ router cutter	C019AX1/4TC	£20.25

OPTIONAL ACCESSORIES:	Product Ref.	Price
3. Guide bush 20mm	GB20	£9.14
4. Small oval template accessory (2	7.8mm x 13mm bar	rel)
	ECL/T/OCS	£16.92
5. Large oval template accessory (3	1.5mm x 17.5mm b	arrel)
	ECL/T/OCL	£16.92
6. Drill bit guide	SNAP/DBG/7	£10.48
7. Universal sub-base	UNIBASE	£20.51
8. Clamp (200mm jaw)	FC/200	£16.03







Certain makes and models of router will require a Unibase to accept the guide bushes



# LARGE **LOCK JIG**

For routing the faceplate and mortise for larger locks quickly and accurately.

- Suitable for DDA (Disability Discrimination Act) style locks. 20mm or 24mm x 235mm radius end face plate and 17mm x 170mm mortise.
- · Adaptor plate included to allow smaller templates (239mm x 60mm) to be fitted (as supplied with standard Lock Jig opposite).
- Suitable for doors 34mm to 58mm thick.
- An auger bit and drill is required to complete deep mortises.



COMPATIBILITY

www.trend-uk.com/compatibility

## INCLUDES:

1 x	Guide bush collar
2 x	Faceplate templates
4	Morting tomplete

1 x Template adaptor



Template

#### **TEMPLATES INCLUDED: Faceplate Dimensions:**

20 x 235mm (radiused ends) 24 x 235mm (radiused ends)	1 2	
Mortise Dimensions:	Template	
17 x 170mm	А	
OPTIONAL ACCESSORIES:	Product Ref.	Price
Guide bushes		

Special 16mm Guide bush collar

Standard 30mm

Fits to GB160 as supplied with the Trend Hinge Jig to give 30mm OD. Secures to bush with integral ring.

**GB30** 

**GB160** 

£9.14

£11.92

	GB/COLL/1630	£7.02	
Universal sub-base	UNIBASE	£20.51	
Recommended 1/2" shank cutters			

12mmØ x 115mm overall length. For up to 70mm deep mortise depending on plunge of router & use of Unibase etc.

Professional	3/75X1/2TC	£45.25
Trade Range	TR37X1/2TC	£36.88
CraftPro	C172DX1/2TC	£25.79

### Recommended 1/4" shank cutters

12mmØ x 70mm overall length. Deepening of mortise with auger bit required.

Professional	3/8LX1/4TC	£30.30
CraftPro	C019AX1/4TC	£20.25

SPARE TEMPLATES:	Product Ref.	Price
Size 17mm x 170mm mortise	WP-LOCK/A/T/A	£10.59
Size 20mm x 235mm faceplate (RE)	WP-LOCK/A/T/1	£10.59
Size 24mm x 235mm faceplate (RE)	WP-LOCK/A/T/2	£10.59
Size 20mm x 235mm faceplate (RE)	WP-LOCK/A/T/1	£10.59

ACCESSORY TEMPLATES:	Product Ref.	Price
Size 15mm x 40mm template	WP-LOCK/A/T10	£14.49
Size 15.5mm 115mm template	WP-LOCK/A/T12	£14.49
Size 15.5mm x 225mm template	WP-LOCK/A/T13	£14.49
Size 15.5mm x 235mm template	WP-LOCK/A/T14	£14.49
Size 17mm x 180mm template	WP-LOCK/A/T15	£14.49
Size 18mm x 85mm template	WP-LOCK/A/T16	£14.49
Size 18mm x 176mm template	WP-LOCK/A/T17	£14.49
Size 18mm x 180mm template	WP-LOCK/A/T18	£14.49
Size 19mm x 100mm template	WP-LOCK/A/T19	£14.49
Size 19mm x 113mm template	WP-LOCK/A/T20	£14.49
Size 19mm x 235mm template	WP-LOCK/A/T23	£14.49
Size 20mm x 153mm template	WP-LOCK/A/T24	£14.49
Size 20mm x 234mm template (RE)	WP-LOCK/A/T27	£14.49
Size 20mm x 235mm template	WP-LOCK/A/T28	£14.49
Size 20mm x 240mm template (RE)	WP-LOCK/A/T29	£14.49
Size 22mm x 125mm template	WP-LOCK/A/T33	£14.49
Size 22mm x 165mm template	WP-LOCK/A/T30	£14.49
Size 22mm x 224mm template	WP-LOCK/A/T31	£14.49
Size 22mm x 225mm template (RE)	WP-LOCK/A/T34	£14.49
Size 22.4mm 235mm template	WP-LOCK/A/T35	£14.49
Size 22.5mm x 77mm template	WP-LOCK/A/T36	£14.49
Size 24mm x 235mm template	WP-LOCK/A/T44	£14.49
Size 25.4mm x 235mm template	WP-LOCK/A/T49	£14.49

(RE) = radiused ends

## **HOW BOTH LOCK** JIGS WORK:

#### **TEMPLATES**

Both the mortise and the faceplate are selected to suit the size of the lock. Templates are held by two powerful magnets.



#### **COMPATIBILITY**

Must be used with a 30mm x 6mm spigot guide bush and 12mm diameter cutter. For deep mortises a heavy duty router should be used with the long reach cutter.



### HINGE AND LOCK OPERATIONS

If a medium duty router is to be used, then full mortises are not possible and a suitable sized auger bit in a drill will be required. If the Lock Jig is to be used in conjunction with the Trend Hinge Jig, then the collar can be used to bush out the 16mm guide bush to 30mm.



### **FINAL APPLICATION**

Mark the appropriate position for the lock and centralise on the door using the centre line notches within the jig aperture. The jig can then be clamped to the door. In most applications, the door will be held secured on its side.



# *EASYSCRIBE*

A handheld offset pencil line drawing scribing tool with extendable plate. Used for architrave, skirting, scribing doors, scribing worktops and setting hinge recess depths etc.

- Suitable for a multitude of uses including scribing in a door to the frame, scribing worktops, marking architrave offset, marking hinge recess depth (if cut by hand). Ideal for marking out flooring, worktops and tiles etc.
- Can also be used as a marking gauge.
- Knurled fore grip sliding steel guide plate to allow up to 50mm
- Marks narrow pencil line 0.7mm wide to ensure accuracy.
- Includes three spare graphites.



Patent applied for



trend-uk.com/video



**SPARE PARTS:** 

Clamp assembly

10 x 2H graphite leads

2mm x 0.7mm x 44mm



£4.15

£2.13

Adjustable lead

length locking

knob.



Thumbwheel for width

adjustment 1 - 40mm. Move articulated arm by

turning knurled knob.

Scribing panels. Lead length can be adjusted. Narrow 0.7mm wide pencil line.



Contoured plastic handle

Parallel a cutting line.



Marking the side of a door. Thin 0.5mm guide plate with 50mm projection for access into narrow gaps.

# **CORNER CHISEL**

Product Ref.

E/SB/10

WP-E/SB01

For squaring hinge and lock faceplate recesses.

- High Speed Steel (HSS) anvil for long life.
- Locates in the rounded corner of the routed recess.
- One square blow with a hammer to square corners.
- Can be used with Trend Hinge Jig and Lock Jigs.

**CHISEL** £15.76





Before After





Self clamping straight line clamp guide.

- · For accurate guiding of a router or a saw.
- Integral clamping of workpiece and double locking
- · Ideal when trimming door to length.
- See page 210 for other sizes.

Scribe flooring easily

EASYSCRIBE TRE

*VJS/CG/36* 

Large 90° head £37.08 accessory.


ACCESSORY: Product Ref. Price Large 90° head VJS/CG/SQA £11.68 Allows clamp to be squared up for accuracy.

# **DOOR STAND**

Holds door on its edge while routing a hinge recess and mortise for locks.

- Allows door to be tilted back to assist fitting into frame.
- Holds door securely while routing, planing and drilling.
- · Non-scratch base.
- Adjustable clamp for doors 32mm to 55mm thick.
- Maximum door weight 58kg.

# **D/STAND/A** £50.17



Support to assist fitting hinges & mortises. door to frame or lining.



· Ideal for pinned hinges.

Foot operated lifter to

**DOOR LIFTER** 

• Lifts door 38mm (1-1/2") high and supports maximum weight 108kg.

• Hanging hole for storage.

**LIFT/A** £18.32







# Holds door while drilling and fitting locks.

- No set-up time needed.
- No more searching for alternative door stops.
- · Padded to prevent door and floor damage.
- · For doors up to 55mm thick.

# **D/CLAMP/A** £23.69





# **DOOR SKATE**

Allows doors and sheet material to be moved around workshop more easily.

- For sheet/doors up to 45mm thickness.
- Maximum sheet size 2400mm x 1200mm and maximum weight of 226kg.
- Ideal for doors, sheet material, boards and worktops.
- polyurethane wheels, with ball bearings, for smooth operation.



# **D/SKATE/A** £31.78





# DOOR & **BOARD LIFTER**

Allows up, down and side to side movement for easy positioning and fixing of doors, panels and plasterboard.

- Foot operated lifter to support door while fitting into door frame, freeing up the users hands.
- 360 degree rotation.
- Lifts door 60mm (2-3/8") high
- Made from metal with non-marring foot pad.
- · Raises up parallel to the floor.
- Ideal for carpenters, plasterers, dry liners and locksmiths.

Standard Max. Weight 75kg (165lbs)



Non-slip surface pad to aid grip when operating by foot or kne

**SWIVEL TYPE** 







Swivel for easy nositioning

# BUTT HINGE TEMPLATE

A routing template that allows a router to create a hinge recess on a door.

- Made from clear 8mm thick plastic.
- Includes metal templates for 75mm and 100mm butt hinges.
- Magnets in template frame to hold templates.
- Cuts rounded corners which can be removed with a corner chisel or chisel.
- Use on doors from 35mm to 44mm thick.
- Requires 12mm diameter cutter and 30mm guide bush.
- User-made batten 44mm x 34mm x 450mm and two F-clamps are required.

## **TEMP/BH/A** £46.58

Size: 214 x 135 x 8mm







trend-uk.com/vid

#### INCLUDES:

1 x 75mm Template 1 x 100mm Template

OPTIONAL ACCESSORIES:	Product Ref.	Price
Recommended 1/4" shank cutters		
Professional 12mmØ router cutter	3/8LX1/4TC	£30.30
CraftPro 12mmØ router cutter	C019AX1/4TC	£20.25
Recommended 30mm guide bush	Product Ref.	Price
(A Unibase may be required)	GB30	£9.14
Extra templates	Product Ref.	Price
3" template	WP-BH/T/3	£9.14
4" template	WP-BH/T/4	£9.14

# LOCK RECESS TEMPLATE

Clear plastic template for use with any plunge router to accurately fit 2, 3 and 5 lever sash and dead mortise locks.

- Clear plastic with magnets to hold metal templates.
- Includes six faceplate recess and three mortise templates.
- Requires 12mm diameter x 63mm cut length cutter with 1/2" shank and 30mm guide bush. A 1/4" shank extra long cutter can also be used but deepening of mortise with auger bit will be required.
- User-made batten 44mm x 34mm x 450mm and two F-clamps are required.

# **TEMP/LR/A** £61.92



#### SUITABLE FOR FOLLOWING LOCKS:

Additions H32306, H32331, Chubb 3U75, 3G114, ERA 196-62, 201-31, 201-32, 202-32, 208-31, 221-31, 301-32T, 302-32T, 467-32T, 471-32T, 571-32T, latch, ES bed latch, Jewson LISJK072, LISJK100, Legge P3751, P1645, Travis Perkins P19, P20, P22 (802503), P29 (802510), P81, Union L99, Y2201, Y2294, Yale PM246, PM320 and PM550.



Faceplate Dimen Imperial	Template	
7/8" x 6-1/8"	22.2 x 156mm	1
7/8" x 6"	22.5 x 152.5mm	2
1" x 5-1/4"	25.4 x 133.5mm	5
1" x 6"	25.4 x 153mm	7
1" x 6-3/8"	25.6 x 162mm	12
-	25.1 x 57mm	15
Mortico Dimoneia	nne:	

Imperial	Template	
5/8" x 4-1/4"	16 x 107mm*	В
3/4" x 3"	19 x 79mm*	С
5/8" x 3-17/32"	16 x 90mm*	Е

\* These are maximum mortise lock case (body) lengths, unless radius ends are squared with a chisel. Actual length of mortise is 7mm longer. Smaller mortise locks can be accommodated depending on position of their fixing screws.

OPTIONAL ACCESSORIES:	Product Ref.	Price
Recommended 1/2" shank cutters		
Professional 12mmØ router cutter	3/75X1/2TC	£45.25
CraftPro 12mmØ router cutter	C172X1/2TC	£25.79
63mm cut length.		
Recommended 1/4" shank cutters	Product Ref.	Price
Professional 12mmØ router cutter	3/8LX1/4TC	£30.30
CraftPro 12mmØ router cutter	C019AX1/4TC	£20.25
CraftPro 12mmØ router cutter 70mm overall length. Deepening of m required.		

(A Unibase may be required)



**GB30** 

£9.14

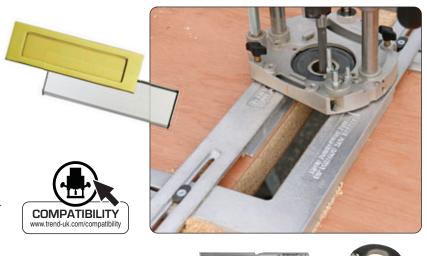
# LETTERBOX JIG

Enables the cutting out of letterbox openings to be carried out quickly and accurately.

- The size-adjusting jig ensures that template openings are always cut exactly square.
- · Made from cast aluminium and machined to a high standard.
- Simple to set-up and use.
- The jig is adjustable to enable apertures to be cut out as small as 210mm by 46mm and as large as 310mm by 82mm.
- Requires 1/2" dia. x 50mm cut length cutter.
- Includes 30mm x 10mm spigot guide bush.
- A Unibase may be required for certain makes and models of router.

## **LB/JIG** + £101.97

0	OPTIONAL ACCESSORIES: Product Ref. Price				
1.	Recommended 1/2" shank cutters				
	Professional 12.7mmØ	3/83DX1/2TC	£38.36		
	CraftPro 12.7mmØ	C153DX1/2TC	£28.58		
	All with 12.7mm (1/2") diameter x 50mm cut length				
2.	Universal sub-base	UNIBASE	£20.51		







Certain makes and models of router will require a Unibase to accept the guide bushes



Clear plastic template for use with any plunge router to accurately fit three sizes of letterbox plates.

- · Made from 6mm thick clear plastic.
- For three sizes of letterbox plates: 220 x 50mm, 210 x 60mm and 200 x 60mm.
- Use on wooden doors up to 50mm thick.
- Use with 1/2" collet plunge router.
- Requires 12mm cutter and 30mm x 5mm spigot guide bush.
- · A Unibase may be required for certain makes and models of router.

### **TEMP/LB/A** £46.58

Size: 326 x 290 x 8mm



0	PTIONAL ACCESSORIES:	Product Ref.	Price
1.	Recommended 1/2" shank cutters		
_	Professional 12mmØ	3/73X1/2TC	£39.70
Π	CraftPro 12mmØ	C200DX1/2TC	£25.79
	All with 12mm diameter x 50mm cut length		
2.	Recommended 30mm guide bush	GB30/B	£9.14
3.	Universal sub-base	UNIBASE	£20.51





Certain makes and models of router will require a Unibase to accept the guide bushes

# SHELF SUPPORT TEMPLATE

A template to allow routing or drilling of 32mm centre holes for 5mm diameter shelf supports.

- Made from clear plastic, with graduation scales.
- · Adjustable clamping bar with two locking knobs.
- Can be used with MDF, timber and particle board.
- A Unibase may be required for certain makes and models of router.

### **TEMP/SS/A** £49.38

Size: 500 x 130 x 8mm

#### **INCLUDES:**

12 x Plain metal shelf supports 1 x Knurled repeat index pin

1 x 9.5mm guide bush




**SUITABLE TOOLS** 



COMPATIBILITY



S	UPPORTS ACCESSORIES:	Product Ref.	Price
1.	Metal shelf supports SS/M5/12 £3.17     Pack of 12 with rubber sleeve to protect glass. Sleeve can l removed. Pin=5mmØ x OL=16.5mm.		
2.	Brass plated shelf supports Pack of 12. Pin=5mmØ x OL=23mm.	SS/B5/12 Load capacity	£3.17 100kg.
3.	Plastic shelf supports Pack of 12. Load capacity 100kg.	SS/P5/12	£3.17



# COMBINATION ROUTER BASE

A quick fitting, fast changing, multi-functional router base. Fits most routers with 8mm, 10mm and 12mm diameter rods at 60.3mm to 174mm centres.

- Multi-functional guick fit base with superior finish.
- Improved accuracy and greater stability.
- Includes 7mm cranked rods for rods at 60.3mm to 174mm centres.

**CRB** £73.20

# 7 FUNCTIONS:



Offset base For better control when edge routing.



Clamp guide adjustable grooving





Anti-tilt support Router compass For routing circles of 19mm to For stable edge work 224mm radius Height range 8mm to 80mm.



VIDEO TO

Offset mortising 50mm to 200mm.



False panel groove copier For creating repeated grooves.



COMPATIBILITY www.trend-uk.com/compatibility

Varijig frame system Anti-tilt facility for panel cutting when used with the Varijig with accessory guide bush Ref. GB40/B.

# INCREASED FUNCTIONALITY WITH ACCESSORIES:

# SIDE-FENCE

Screws onto Combination Router Base. 270mm long with facility to accept false fence.

CRB/SF £18.32



# **EXTENSION RODS**

Two pairs of threaded rods for increasing circle radius by 440mm.

N/COMPASS/AEX £24.34



### TRIMMING BASE

Trim base with bearing guide follower for flush edge trimming of hardwood lippings. Lipping projection maximum 6mm.

**CRB/TB** £29.51



# **CRANKED RODS**

Pair of 7mm diameter rods to allow more precise levelling of bridge when using different routers. Allows for greater range of rod centre routers of 60.3mm to 174mm. For pre-2018 models.

**CRB/CR** £20.90



# **MORTISE FLUTING ACCESSORY**

Works in tandem with the CRB to give it even more versatility. It creates a stable platform for routing repeatable, quick and accurate mortises (both centred and off-centre). For joinery, lock sets and hinges, fluting, edge moulding and more.

**CRB/MF** £52.99




ACCESSORY:	Product Ref.	Price
Guide bush	GB40/B	£16.00
40mm with extra lon	g 14mm spigot	
for use with Varijig fi	rame system.	









# LARGE **COMPASS**

This router compass is used for cutting circles and arcs from 100mm up to 610mm radius.

- · Made from clear plastic.
- Printed graduated scale for precise radius setting.
- Fits to the base of a router.
- The hole accepts a 30mm guide bush.

## **R/COMPASS/A** £49.38



2 x Fixing screws

1 x 3mm pivot point



Two types of pivot can be fitted to compass, V-point or 3mm point.



For circle cutting with a router.

### **BEAM TRAMMEL BARS**

- Can be used with the majority of routers on the market.
- The bar fits into one of the holes for the router side-fence.
- Pivot point height is adjustable.

BEAM/001 £19.46

8mm rod dia. x 500mm

BEAM/002 £28.58

10mm rod dia. x 500mm



### **BEAM TRAMMEL ATTACHMENT POINT**

- The point attaches to one of the router's fixed rods.
- · Pivot point is adjustable in height and this trammel can be used on most 8mm rods.



# **ROUTING BOOK**

STER COMPASS

**COMPATIBILITY** 

'Complete Routing' by Alan Holtham, an essential read for the amateur or the experienced router user.

Full of easy to read routing techniques and step by step guides on how to use your router to its full potential. With only a little experience you will soon be using the router to transform both the making and the detail of all your woodworking projects.

Includes four step by step projects for all abilities:

- Bathroom cabinet
- Occasional table
- Bathroom storage rack









# **ELLIPSE & CIRCLE CUTTING JIG**

Designed to enable virtually any router to cut ellipses and circles.

- Used for corner tables, arches, desks and mirrors.
- Setting-up and operating is simple and effective, as proven by existing industrial users.
- A connector plate on the end of the bar fits directly onto the fence rods of Trend routers. For the fixing of other makes of routers, an accessory Adapter Base-Plate is required.
- By using one slide, the jig can be adapted for cutting circles.
- With additional extension bars, larger ellipses and circles can be cut.

**ELLIPSEJ/A** £197.33







#### INCLUDES:

1 x Cross frame 2 x Sliders 2 x 500mm bars 1 x Connector plate






#### SPECIFICATION:

Ellipse major axis	is Ellipse minor axis	
	max.	min.
1800mm	1650mm	1400mm
1700mm	1550mm	1300mm
1600mm	1450mm	1200mm
1500mm	1350mm	1100mm
1400mm	1250mm	950mm
1300mm	1150mm	900mm
1200mm	1050mm	800mm
1100mm	950mm	710mm
1000mm	850mm	610mm
900mm	760mm	550mm
800mm	650mm	550mm
700mm	580mm	580mm
Circle diameter min.		580mm
Circle diameter max.		1800mm





Router, cutter & clamps not included



# **MINI ELLIPSE & CIRCLE CUTTING JIG**

The Mini Ellipse Jig is ideal for routing elliptical picture frames, mirrors, clocks and small coffee tables etc.

- Working on the same principle as the Ellipse Jig, the plastic Mini Ellipse Jig will cut much smaller ellipses.
- The main plate will accept most makes of small routers for which screws are provided.
- By removing one slide and using a special pin, the jig can be used to accurately cut
- For marking out prior to cutting, the plate can be fitted with a pencil plug. The jig is then turned into a drawing instrument.

**ME/JIG +** £126.69



## **INCLUDES:**

1 x Cross frame
1 x Main plate
2 x Sliders
1 x Circle slider
1 x Pencil plug
1 x Set of securing screws



#### SPECIFICATION:

Ellipse Illajor axis		IIIOI axis
	max.	min.
580mm	520mm	430mm
500mm	450mm	360mm
400mm	340mm	250mm
300mm	250mm	160mm
220mm	160mm	160mm
Circle diameter min.		160mm
Circle diameter max		600mm

To download videos, test reviews, spare parts & instruction manuals visit: www.trend-uk.com/downloads

Adjustable frame and guide for use with a router.

- · Adjustable frame for rectangles and squares.
- · Allows a router to cut recesses, slots, face panel moulds etc.
- Can also be used to create panel doors for kitchens etc.
- Four lengths of 700mm extrusion with dual metric/imperial measuring scales.
- Working area 600mm x 600mm and cross cut accuracy to 0.1mm. A square is required to square frame before use.
- Use with a guide bush with minimum 8mm spigot length, or use Unibase as a guide.
- · Secure with standard clamps or use optional clamp kit. See below.

**VARIJIG £86.99** 



Anti-tilt shoe



VIDEO TO trend-uk.com/video

#### INCLUDES:

4 x Alloy extrusions with scales 4 x Corner brackets 1 x Anti-tilt shoe



#### **OPTIONAL ACCESSORIES:**

	Clamp kits	Product Ref.	Price
1.	Pair sliding friction clamps with 32mm clamping thickness	VJS/CK	£27.13
2.	Pair sliding friction clamps with 51mm clamping thickness	VJS/CK/L	£41.02
3.	Recommended guide bushes		
	24mm with extra long 10mm spigot	GB24/A	£16.00
	30mm with extra long 10mm spigot	GB30/A	£9.80
Ξ	40mm with extra long 14mm spigot	GB40/B	£16.00
4.	Unibase	UNIBASE	£20.51









Certain makes & models of router will require a Unibase to accept the quide bushes



Rectangles



2540MM

# **VARIJIG STRAIGHT GUIDE**

For guiding routers, circular saws and jigsaws.

Two lengths of extrusion with jointing piece to give maximum working length of 100" (2540mm). Reduced length for easier transport and storage.

- · Clamps can slide along each extrusion.
- Maximum material clamping thickness 32mm.
- Adjustable friction washer on clamps prevent clamp from sliding too freely.
- One extrusion has dual metric/imperial scale.
- Can be combined with Varijig parts.

**VJS/G/100** £66.69





1 x 56" Alloy extrusion with scale

1 x 56" Alloy extrusion

1 x Connecting block

1 x Hex key 4mm 2 x Sliding clamps



ACC	CECC	EC.

1. Long clamp kit Product Ref. Price Pair of sliding friction clamps with 51mm (2") clamping thickness £41.02 2. Long pivot clamp kit Pair of sliding friction clamps with 51mm (2") clamping thickness. VJS/PCK/L £25.79 Clamp head pivots to allow guide to be set at an angl





#### 900MM

# VARIJIG KITCHEN WORKTOP STRAIGHT GUIDE

#### Ideal for kitchen breakfast bars.

- Straight line guide for routers, jigsaws and circular saws.
   Ideal for kitchen worktops.
- Soft pad adjustable friction clamps, which will clamp to thickness of 51mm (2").
- 900mm (35") working length extrusion is ideal for breakfast bars.

VJS/G/35 £59.81



1 x Alloy extrusion with scale 2 x Long sliding clamps





or routers

For saws

# VARIJIG TENON & GROOVING JIG

#### Allows grooves and tenons to be cut using a router.

- Can be used to crosscut boards with a router or circular saw.
- Frame is adjustable to allow narrower or wider grooves to be routed. The
  maximum adjustment is 70mm depending on the diameter of the router
  base. Working length is maximum 400mm.
- The edge of the frame can be used as a guide to trim a panel square using a router.
- Two sliding stops to set groove length.
- Squaring butt has the facility to accept a spelch block to allow a full length groove. Fixing screws are included for this purpose.
- Use with a router and guide bush with a minimum 8mm spigot projection fitted.

# **VJS/TG/JIG** £104.51





### INCLUDES:

- 4 x Alloy extrusions
- 4 x Corner brackets
- 3 x Scales
- 1 x Squaring butt 2 x Length stops
- 1 x Hex key





Trimming



Crosscutting



Trenching/grooving

#### OPTIONAL ACCESSORIES & REPLACEMENT PARTS:

OF HUNAL ACCESSORIES & REPLACEMENT	PANIS.	
Sliding friction clamp kits (fit to extrusions)	Product Ref.	Price
1. Max. 32.0mm thickness (pair)	VJS/CK	£27.13
2. Max. 51.0mm thickness (pair)	VJS/CK/L	£41.02
Long pivot clamp kit     Sliding friction clamp head pivots to allow guide     to be set at an angle. Max. 51mm thickness (pair).	VJS/PCK/L	£25.79
Frame jointing kit     Set of four corner jointing brackets.	VJS/FJK	£22.23

	5. Additional extrusions	Froduct net.	FIICE
-	Extrusions that can be used on the Varijig System		
-	310mm	WP-VJS/07A	£9.80
-	430mm	WP-VJS/07B	£11.11
	700mm	WP-VJS/07	£11.92
	1070mm	WP-VJS/07C	£16.67
-	6. Connecting block kit		
	Jointing block for extrusions. Can be used to join		
	Varijig extrusions together.	VJS/G/CB	£9.93















Long pivot clamp securing extrusion to worktop.



36"

# VARIJIG VARIABLE ANGLE GUIDE

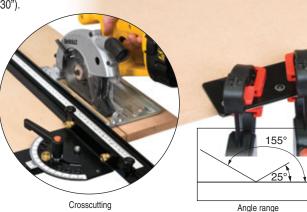
Adjustable angle guide to allow grooving with a router, or crosscutting with a circular saw.




- Router working length at 90° is 915mm (36"). Circular saw working length at 90° is 780mm (30").
- Angle tolerance ± 0.2° with zeroing facility.
- Adjustable position alloy extrusion with scale.

· Requires three clamps or a pair of accessory Varijig friction clamps Ref. VJS/CK, VJS/CK/L or VJS/PCK/L.

**VJS/AG/36** £68.16







ACCESSORY DIRECT FIT CLAMPS: Product Ref. Price 1. Clamp kit (pair) VJS/CK £27.13 Sliding friction clamps with 32mm clamping thickness. 2. Long clamp kit (pair) VJS/CK/L £41.02 Sliding friction clamps with 51mm (2") clamping thickness.

3. Long pivot clamp kit (pair) VJS/PCK/L £25.79 Sliding friction clamps with 51mm (2") clamping thickness. Clamp head pivots to allow guide to be set at an angle.





# OFFSET BASE

This teardrop shaped base is fitted to the router to allow better control when edge moulding by preventing router tilt.

- · Large grip knob for greater control.
- Pre-drilled for Trend, Elu and DeWalt routers.
- · Can be re-drilled by user to suit other makes of router.
- · Made from clear plastic.

# **OFS/BASE** £32.94

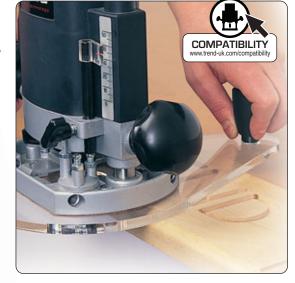
Size: 280 x 180 x 8mm



#### INCLUDES:

- 1 x Teardrop shaped base
- 1 x Knob assembly
- 2 x Fixing screws






# ROUTER T-SQUARE

The router t-square can be used as a straight guide for routing housings, squaring and trimming boards and jig setting.


- 1000mm long blade.
- Blade has two parallel edges to allow router to run on both sides.
- It is also ideal as a general workshop square for marking and setting out.
- · Made from hard wearing solid phenolic laminate.
- Butt has two M5 tapped holes for fitting of a false fence.
- Squareness tolerance 0.5mm over 1 metre.
- Squareness adjustment facility.

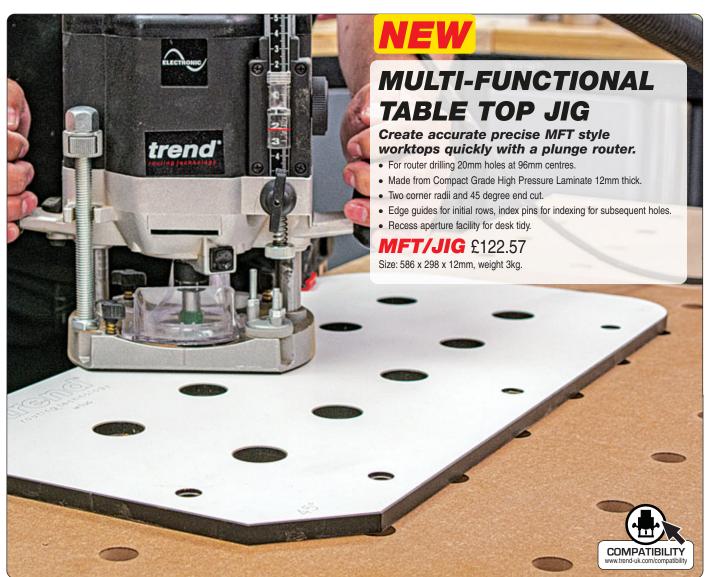RTS/1000 £66.03











50mm & 100mm Radius corner

45° Mitre Corner

W.

INCLUDES: 4 x Line-up Pins 3 x Index Pins



	Product Ref.	ACCESSORIES:			
		TCT Router cutter			
£41.15	C030DX1/2TC	CraftPro 20mmØ			
£9.80	GB30/A	Guide bush 30mm			
£16.03	FC/200	F-clamps (2 required)			

# SHORT ROUND BENCH DOG

Short round bench dogs for Multi-functional table top jig.

- Made from aluminium with M8 threaded through hole.
- Precision turned for a precise fit into a 20mm hole in a MFT top.

**MFT/BD/SR/2PK** £16.43 2 Pack **MFT/BD/SR/4PK** £30.85 4 Pack





# ROUTER TEMPLATES

A range of clear plastic router templates for use with any plunge router.

# **NUMBER & LETTER TEMPLATES**

Clear plastic letter and number templates for routing signs including house names and numbers. The templates are used with a 13mm guide bush and 8mm diameter cutter. The letters are uppercase block characters in Trend Vogue typeface. All letters and numbers are nominal 57mm high. A Unibase may be required for certain makes and models of router.

#### Number templates

# **TEMP/NUC/57** £23.69

Comprising two templates covering numbers 1-10. Size: 360 x 110 x 5mm



# **TEMP/LUC/57** £47.49

Comprising four templates covering the alphabet A-Z. Size: 396 x 110 x 5mm



123450

7°00/10

JWWXYZ



OPTIONAL ACCESSORIES:	Product Ref.	Price
Cutter & guide bush	TEMP/LN57X1/4	£16.67
Comprising CraftPro cutter		
Ref. C011X1/4TC & plastic 13mm		
quide bush		

Spare guide bush GB13/P/A Diameter 13mm x 5mm spigot

Router cutter C011X1/4TC £11.92

Diameter 8mm









# INLAY **PATTERN TEMPLATES**

Clear 6mm plastic inlay templates for use with inlay kit fitted to a plunge router. Inlay kit allows a shaped pocket and matching inlay patch to be routed easily with a router cutter to create perfect inlays. A Unibase may be required for certain makes and models of router.



Clover Template **TEMP/IN/CLO** + \_£11.57 Size: 163 x 163 x 6mm



Diamond Template **TEMP/IN/DIA** + \_\_£11.57 Size: 185 x 132 x 6mm



**TEMP/IN/FIS** + \_\_£11.57 Size: 171 x 126 x 6mm



Fleur De Lys Template **TEMP/IN/FDL** + \_£11.01 Size: 197 x 239 x 6mm



**TEMP/IN/HEA** + \_£11.57 Size: 177 x 160 x 6mm



**TEMP/IN/PIG** + \_\_£11.23 Size: 188 x 148 x 6mm



**TEMP/IN/STA** + £11.57 Size: 146 x 139 x 6mm



**TEMP/IN/SWA** + £11.57 Size: 182 x 220 x 6mm



#### **OPTIONAL ACCESSORY**

#### Inlay Kit

For use with T5 and other compatible routers. Comprises a 1/8" down-cut spiral router cutter Ref. S55/02LHX1/4STC, 7.93mmØ guide bush and inlay collar. By following a template and then removing the collar, an inlay pocket can be routed with matching inlay. A Unibase may be required for certain makes & models of router.

INLAY/KIT/A



# REPLACEMENT

PARTS:	Product Ref.	Price
Guide bush 7.93mmØ	GB793	£9.14
Collar 7.94 to 14.3mm	GB/COLL/7914	£7.02
Router cutter 3.2mmØ	S55/02LHX1/4STC	£24.34

Measurements shown are: Template Width x Height x Thickness.

# **PANEL DOOR** TEMPLATES

Clear plastic 6mm templates for use with a router and template profiling cutter to create a curved rail and panelled door. Two part templates for both the concave and convex cut, for the frame and panel. Seven different sizes of templates are available to suit various door widths.

TEMP/PD/R/A +

£18.24 Rad: 138mm Size: 223 x 155 x 102mm (Door width possible 300 to 440mm)

TEMP/PD/R/D + £14.90

Rad: 264mm Size: 376 x 310 x 102mm (Door width possible 470 to 510mm)

TEMP/PD/R/E + \_ £16.18

Rad: 316mm Size: 425 x 335 x 102mm (Door width possible 515 to 555mm)

TEMP/PD/R/F + Radius: 372mm Size: 470 x 398 x 102mm (Door width possible 565 to 600mm)

TEMP/PD/R/G +

Radius: 400mm Size: 526 x 440 x 102mm (Door width possible 620 to 660mm)

Measurements shown are: Template Width (W) x Curve Width (CW) x Height. (Measurements in brackets represent possible width of door).





**Heart Template** 

# **CORNER / HOLE** TEMPLATE

A template to rout holes of various diameters and to put a concave or convex shape on the component. A template profiler cutter can be used to create holes of 25mm, 50mm, 75mm and 100mm in diameter. The template edge also includes concave and convex 50mm and 100mm radius profiles. A variety of other size holes and curves can be achieved by using a different combination of cutter and guide bush. A Unibase may be required for certain makes and models of router.

### **TEMP/COR/A** £49.38

Size: 290 x 290 x 8mm



# **CABLE TIDY INSERT** TEMPLATE

A template that enables 60mm and 80mm round and 105mm x 55mm rectangular holes to be routed in desks or any surface where cables need to be hidden. The holes will then accept a plastic cable tidy. The template can also be used to cut a

35mm blind hole for circular kitchen door hinges. A 30mm diameter guide bush and a 12mm diameter cutter are required. A Unibase may be required for certain makes and models of



Size: 325 x 290 x 8mm



# **CABLE TIDY INSERTS**

Three sizes of two part ABS plastic inserts enabling the tidy ducting of computer, telephone and audio cables, through desktops, cabinets and shelving units. The 60mm and 80mm inserts have a spring loaded swivel cover plate. Cover plates can be removed to allow plugs to pass through. The rectangle insert has four cable apertures and a ribbon slot.

CTI/60/PK1 + (3 off) \_£8.87 60mm dia. - light grey

CTI/60/PK2 + (3 off) \_£8.87 60mm dia. - brown

 $CTI/60/PK3 + (3 off) _£8.87$ 60mm dia. - black

CTI/80/PK1 (3 off) £12.59 80mm dia. - light grey



Sizes stated	are	routed	hole	size	in	board
OIZCO Stated	aic	Toutou	HOIC	SIZU	111	Doulu.

	ACCESSORIES:	Product Ref.	Price
\	Router cutters 12mm	nØ	
1	Professional	3/8LX1/4TC	£30.30
	Professional	3/73X1/2TC	£39.70
	CraftPro	C019AX1/4TC	£20.25
	CraftPro	C200DX1/2TC	£25.79
	Guide hush 30mm@	GB30	£9.14

CTI/80/PK2 (3 off) \_\_ £12.59

CTI/80/PK3 (3 off) \_\_ £12.59

CTI/105/PK1 (3 off) \_ £10.48

CTI/105/PK3 (3 off) \_ £10.48

80mm dia. insert - brown

80mm dia insert - black

105 x 55mm dia. - grey

105 x 55mm - black

Measurements shown are: Length x Width x Thickness.

# TIMBER REPAIR KIT TEMPLATE

A unique concept which allows oval pockets to be routed to disguise ugly resin pockets and knots in timber. This is especially required when softwoods are being used. The template is supplied with a 10mm diameter 1/4" shank cutter, a 20mm template guide bush and a 40mm inlay collar. A Unibase may be required for certain makes & models of router. Patch size 120mm x 45mm.

# **TEMP/TRKX1/4** £49.38

Size: 400 x 180 x 8mm







# FLEXIBLE CURVE **ROUTING GUIDE** TEMPLATE ACCESSORY

An 8mm thick mini flexible curve used to make templates. Enables a shape to be cut repeatedly with precision. Used in conjunction with a self-guided cutter, a router or router table. Alternatively a standard cutter can be used when guided with a guide bush. Includes fixing screws.

Product Ref.	Length	Price
CURV/8X500	500mm	£29.50
CURV/8X1000	1000mm	£56.83
Inside radius min.	30mm	
Outside radius min.	30mm	
Thickness	8mm	
Max material thickne	ess 10mm	4






countersunk screws (50 pack) CURV/8/SP



133333333



All prices are exclusive of VAT

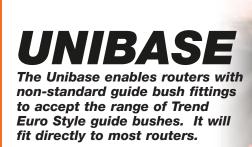
£3.22

INCLUDES:

2 x Line-up pins

1 x Line-up bush

1 x Fixing screw pack



 Line-up pin used with a 16mm plastic line-up bush to ensure concentricity of the cutter to the guide bush when fitting the sub-base.

Suits collet sizes 1/4", 8mm, 12mm and 1/2".

# **UNIBASE** £20.51

Size: 170mmØ x 8mm Router and cutter not included.







**GB/01** 

Product Ref.

Price

£3.17



**OPTIONAL ACCESSORIES:** 

Guide bush mounting screws





The line-up pin fits into the collet and is plunged through the router base. The line-up bush is fitted into the UNIBASE and secured. This is then placed over the line-up pin and rotated in order to line up the fixing holes. The UNIBASE screws are tightened and then the line-up bush can be replaced with any choice of Trend guide bushes. These range from 10mm up to 32mm (GB10 -GB32). For larger diameter cutters a 40mm guide bush (GB40) is available. See opposite page.

R	EPLACEMENT PARTS:	Product Ref.	Price
1.	Fixing screws pack Fixing screws for all makes of router.	FIX/KIT/3	£3.13
2.	Guide bush 16mm diameter plastic line-up guide	UNI/GB16 bush.	£4.89
	Line-up pins		
3.	To suit 1/4" & 1/2" collet	UNI/PIN/1	£2.51
4.	To suit 8mm & 12mm collet	UNI/PIN/2	£2.51
-	To suit 1/4" & 1/2" collet	•	ALIO .

10								GUI	DE BI	JSH						
OUTSIO CUTTER	Ref.	GB10	GB11	GB12	GB14	GB16	GB17	GB18	GB20	GB22	GB24	GB26	GB28	GB30	GB32	900
	mm /	10 mm	11 mm	12 mm	14 mm	16 mm	17 mm	18 mm	20 mm	22 mm	24 mm	26 mm	28 mm	30 mm	32 mm	40 mn
7/64	3	3.5	4	4.5	5.5	6.5	7	7.5	8.5	9.5	10.5	11.5	12.5	13.5	14.5	18.5
1/8	3.2	-	3.9	4.4	5.4	6.4	6.9	7.4	8.4	9.4	10.4	11.4	12.4	13.4	14.4	18.4
5/32	4	-	3.5	4	5	6	6.5	7	8	9	10	11	12	13	14	18
3/16	4.8	-	-	3.6	4.6	5.6	6.1	6.6	7.6	8.6	9.6	10.6	11.6	12.6	13.6	17.6
13/64	5	-	-	3.5	4.5	5.5	6	6.5	7.5	8.5	9.5	10.5	11.5	12.5	13.5	17.5
7/32	5.5	-	-	-	4.2	5.2	5.8	6.2	7.2	8.2	9.2	10.2	11.2	12.2	13.2	17.2
15/64	6	-	-	-	4	5	5.5	6	7	8	9	10	11	12	13	17
1/4	6.3	-	-	-	3.8	4.8	5.4	5.8	6.8	7.8	8.8	9.8	10.8	11.8	12.8	16.8
5/16	8	-	-	-	-	4	4.5	5	6	7	8	9	10	11	12	16
23/64	9	-	-	-	-	3.5	4	4.5	5.5	6.5	7.5	8.5	9.5	10.5	11.5	15.5
3/8	9.5	-	-	-	-	-	3.8	4.2	5.2	6.2	7.2	8.2	9.2	10.2	11.2	15.2
25/64	10	-	-	-	-	-	3.5	4	5	6	7	8	9	10	11	15
7/16	11	-	-	-	-	-	-	3.5	4.5	5.5	6.5	7.5	8.5	9.5	10.5	14.5
15/32	12	-	-	-	-	-	-	-	4	5	6	7	8	9	10	14
1/2	12.7	-	-	-	-	-	-	-	3.6	4.6	5.6	6.6	7.6	8.6	9.6	13.6
-	13	-	-	-	-	-	-	-	3.5	4.5	5.5	6.5	7.5	8.5	9.5	13.5
-	15	-	-	-	-	-	-	-	-	3.5	4.5	5.5	6.5	7.5	8.5	12.5
5/8	16	-	-	-	-	-	-	-	-	-	4	5	6	7	8	12
-	18	-	-	-	-	-	-	-	-	-	-	4	5	6	7	11
23/32	18.2	-	-	-	-	-	-	-	-	-	-	3.9	4.9	5.9	6.9	10.9
3/4	19	-	-	-	-	-	-	-	-	-	-	3.5	4.5	5.5	6.5	10.5
-	20	-	-	-	-	-	-	-	-	-	-	-	4	5	6	10
7/8	22.2	-	-	-	-	-	-	-	-	-	-	-	-	3.9	4.9	8.9
1	25.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.3
1-1/8	28.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.7
1-1/4	31.8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.1

# **CUTTER TEMPLATE/GUIDE BUSH** RELATIONSHIP

The chart on the left shows the offset which results from using a specific size of guide bush and cutter. This offset shown on the shaded areas should be calculated prior to producing a template. All the guide bushes will fit the UNIBASE, GB/5 and GB/PLATE sub-bases - see opposite.


### **GUIDE BUSHES WHEN HAND ROUTING**

Guide bushes are required when material has to be profiled or routed to a set pattern or shape.

In operation, a suitable guide bush is first mounted on the router base or sub-base. When choosing guide bush and cutter, make allowances for a recommended minimum of 3.5mm between cutter and outside of bush. This ensures there is enough clearance to allow the waste to clear the guide bush.

The diagram shows the relationships between the cutter, guide bush and template. The offset (E) gives the position the template must be distanced from the finished

This difference is shown in the chart on the left by the shaded area relative to the range of bushes and cutters available.



# *GUIDE BUSHES & SUB-BASES*



### **EURO STYLE PRECISION** STEEL GUIDE BUSHES

- Guide bushes to guide the router when using a template.
- Plate diameter is 60mm.
- Fit directly to Trend T3, T4, T5, T5 MK2, T9, T10 and T11 and some other light duty routers. Please visit www.trend-uk.com/compatibility
- Will fit other makes of router when used with GB/5, GB/PLATE or UNIBASE.

<u> </u>								
			⊢ ID -	→				
0	D	Р	ID	Product				
mm	inch	mm	mm	Ref.	Price			
7.74	-	6	6.5	GB774	£9.14			
7.93	(5/16")	5	4.8	GB793	£9.14			
9.5	(3/8")	6	7.9	GB95	£9.14			
10	-	6	7	GB10	£9.14			
10.8	-	4.5	8.8	GB108	£9.14			
11	-	6	8	GB11	£9.14			
11.1	(7/16")	6	9	GB111	£9.14			
12	-	6	9	GB12	£9.14			
14	-	6	11	GB14	£9.14			
15.7	-	6	14.1	GB157	£9.14			
15.8	(5/8")	6	14	GB158	£10.08			
16	-	6	13	GB16	£9.14			
16	-	10	14	GB160	£11.92			
17	-	6	14	GB17	£9.14			
18	-	6	15	GB18	£9.14			
20	-	6	17	GB20	£9.14			
22	-	6	19	GB22	£9.14			
22.2	(7/8")	6	19.2	GB222	£9.14			
23.8	(15/16")	6	20.8	GB238	£9.14			
24	-	6	21	GB24	£9.14			
24	-	10	21	GB24/A	£16.00			
24	-	10	22	GB240	£16.00			
25.4	(1")	6	22.4	GB254	£9.14			
26	-	6	23	GB26	£9.14			
27	(1-1/16")	6	24	GB27	£9.14			
28	-	6	25	GB28	£9.14			
28.6	(1-1/8")	6	25.6	GB286	£9.14			
30	-	5	27	GB30/B	£9.14			
30	-	6	27	GB30	£9.14			
30	-	10	27	GB30/A	£9.80			
30.2	(1-3/16")	6	27.2	GB302	£9.14			
31.8	(1-1/4")	6	28.8	GB318	£9.14			
32	-	6	29	GB32	£9.14			
33.3	(1-5/16")	6	30.3	GB333	£9.14			
40	-	6	37	GB40	£9.14			

#### **Guide Bush Set**

40

Set of 12 guide bushes with 6mm spigot. Even sizes 10mm to 32mm in 2mm increments.





GB40/B

£16.00

# DRILLING TEMPLATE

Paper templates are available to download from our website for the drilling of sub-bases to suit your make and model of router.

www.trend-uk.com/downloads



# INLAY WORK

Aluminium collars with integral rubber 'O' rings to fit guide bushes. Enables single shaped templates to be used to cut perfectly matching pocket & inlay. Templates should be made with suitable sized corners for the collar being used. The correct diameter straight cutter as indicated should always be used. (Guide bush not included.)

(	
GB/COLL/7914	£7.02
Fits to GB793 to give 14.3mm (9/16") OD. Use with 3.2mm (1/8") Ø cutter.	
use with 3.2mm (1/8 ) Ø cutter.	

**GB/COLL/1630** £7.02Fits to GB16 to give 30mm OD. Use with 7mmØ cutter.

**GB/COLL/2040** £7.02 Fits to GB20 to give 40mm OD. Use with 10mmØ cutter.

£7.02 **GB/COLL/25454** 

Fits to GB254 to give 54mm OD. Use with 14.3mm (9/16") Ø cutter.

GB/COLL/3054 Fits to GB30 to give 54mm OD. Use with 12mmØ cutter.



# **SCREW-ON (THREADED** PATTERN) GUIDE BUSHES & SUB-BASE

#### **Guide Bushes**

- To fit recess size 1-3/16".
- · Guide bush with locking ring.

#### **GB/US/30**

30mm diameter screw-on style guide bush.

**GB/US/160** 

16mm diameter screw-on style guide bush for hinge jig.

#### Circular sub-base for screw-on style guide bushes

- Size 170mm dia. x 8mm.
- · Solid laminate.
- Supplied with line-up cone.
- Ensures concentricity of cutter and guide bush.

**GB/5/US** + £37.13



SUB-BASE FIXING SCREWS

Ref.

Price

DeWalt DW613 guide bush

**Sub-base Fixing Screws** 

**Guide bush screws** 

Screw Set M5 bolt set (5 pairs) GB/03 £2.51



### SUB-BASE SETS

Sub-bases to accept Euro Style guide bushes

- · Hard wearing solid laminate.
- · Accepts Trend Guide Bushes.
- Supplied with a line-up pin & bush.
- · Ensures concentricity of cutter & guide bush.

£7.02

Circular Sub-base Size: 170mm diameter x 8mm.

**Router Models** Product Ref. Dewalt DW620, 621, 624, 625EK, 629, Elu OF97(E), MOF131, 177(E), Bosch GOF 1600A, 1700ACE, Makita

nrugiu, illiuc a dag clivizuour	٦,	
1250R >11/03	GB/5	£29.24
Festo OF900E, OF1010, OF1400	GB/5/I	£33.34
Makita 3612C, 3612	GB/5/J	£33.34
Triton TRB001, MOF001	GB/5/Q	£33.34
Festool OF1400,		
Bosch POF1400	GB/5/R	£33.34
Makita RT0700C, DRT50	GB/5/V	£33.34
Milwaukee M18 FTR-0(X)		
with plunge base	GB/5/X	£32.37
The GB/5 can be supplied drilled		
for other makes and models.	GB/5/S*	£33.34

Please see Compatibility Chart and state make and model when ordering.



Square Sub-base Size: 290mm x 197mm x 8mm.

Router Models Product Ref. Dewalt DW620, 621, 624, 625EK, 629, Elu OF97(E),

The GB/PLATE can be supplied drilled for

MOF131, 177(E), Bosch GOF 1600A, 1700ACE, Makita RP0910, 0111C & B&Q CLM2050R, 1250R >11/03 **GB/PLATE** £32.13

other makes and models. GB/PLATE/S\* £38.36 \*Please see Compatibility Chart and state make and model when ordering





£7.02

£7.02

# ROUTER TABLE **ACCESSORIES**

# ROUTER TABLE INSERT

Large router table insert plates for incorporation into user-made router tables.

- Router plates which can be drilled for various routers.
- Two concentric snap-in rings.
- Three hole sizes of 98mm, 68mm & 32mm diameter.
- · Includes lead-on pin .
- · Will accept screw-on style guide bushes for use as a copy follower.

# RTI/PLATE/A (Alloy) £58.30


Drilled for Trend TBC router and T11 guide router. Includes fixing kit. Size: 306 x 229 x 6.35mm

# RTI/PLATE (Plastic) £49.38

Moulded with slight crown (0.8mm) for distortion free cuts. Corner clips to clamp to underside of table. Size: 306 x 229 x 9.5mm


INCLUDES:	SPECIFICATION:		
2 x Concentric rings	Max. router weight	8kg	
1 v Lead-on nin	May router hase dia	200mm	

OPTIONAL ACCESSORY: Product		Price
Insert plate shield (RTI/PLATE only)	RTI/SHIELD	£17.98
Router fixing kit (csk screws)	FIX/KIT/2	£3.13





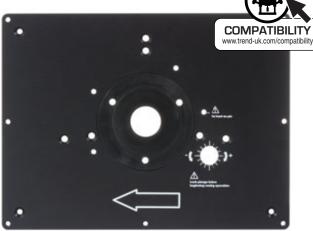A shield is available for use with the Ref. RTI/PLATE when using guided cutters and no backfence



Ref. RTI/PLATE/A




Ref. RTI/PLATE

ROUTER TABLE BACKFENCE

### **NO-VOLT RELEASE SWITCHES**

Versatile no-volt release switches for the remote switching of power tools such as Trips power to the machine should the power be momentarily cut off. Switches







router table

routers when mounted in a router table. Can be placed in a convenient position. must be bolted directly to the router table leg or a user made workboard.

# FEATHER BOARD

Vertical or horizontal pressure guard. Prevents the material from being thrown back by the cutter and holds the work down onto the table or against the backfence.

PRESSURE/1 £9.80



### **PUSHSTICK**

Rigid plastic safety pushstick for guiding small sections of timber over a router table. Keeps operators hands away from the cutting tool. 420mm overall length.

**PUSHSTICK/1** £6.36 trend Backfence complete for incorporating into a user-made router table. Includes sliding cheeks, edge planing facility of 1.4mm and 2.4mm, top featherboard pressure, clear safety guard and 57mmØ dust spout. RT/FENCE/A £74.53 Length 595mm, table slot centres Edge planing 408mm

#### MITRE FENCES & 19MM TRACK

For use with user-made router tables, saw benches and band saws. Heavy duty alloy body with adjustable stops at -45°, 90°, +45°. Scale pitch of 5°. Protractor body 142mm x 48mm high. Spring loaded locater for 90° with 1° adjustable location centring scale.

MITRE/1 £30.56 For PRT. Steel bar 300 x 17 x 7mm

MITRE/3 £30.56 For CRT/MK3 and 19mm track. Alloy bar 351 x 18.9 x 9mm



WP-CRTMK3/38 (600mm) WP-WRT/38 (800mm) £16.39 Mitre fence track extrusion for MITRE/3. T-slot 19.2mm (neck) x 23.9mm (base). T-slot height 9.8mm.





To download videos, test reviews, spare parts & instruction manuals visit: www.trend-uk.com/downloads

# ROUTER ACCESSORIES

#### FINE HEIGHT ADJUSTERS

These fine height adjusters simply fit onto the router and allow fine adjustment of the cutter height. They are especially useful for accurate work such as when using a dovetail jig. They are invaluable when the router is held inverted in a router table.



£16.67 FHA/001

Suitable for: Trend T3, T5, T5 MK2 Axminster AW635R Challenge 1020W Champion CPR850 DeWalt DW613, 614, 615 DIY ER005 Draper R850V Einhell EOF 850SP, BOF 1050E

Elu MOF 96(E) Ferm FBF-6E, 8E, 1050E Nutool NPT850,102, HP6, MNPC900

Powerbase 1020W Performance Power 1020W

Perles OF808(E), OF2-808(E) Power Devil PDW5026, 5027 Power Base 1020W Silverline 762170, 783111, AT3305

Virutex FR78 78C Wickes 900W Sealey SR1000 Osaki 1020W



FHA/003

Suitable for: Trend T10 Elu MOF 177(E), 131 DeWalt DW624, 625EK, 629 FHA/009 £15.22

Suitable for: Trend T4 Ferm FBF-850E

For use in router tables where there is a limited router cutter shank length available. Precision machined one-piece steel body & multi-slit spring steel collets.



These sizes have an 8mm shank & should be used with medium duty routers of min. 850w. Increases spindle length by 41mm. Use at max. speed 18,000 rpm. Max. cutter diameter 35mm & max. tool cut length 25mm. Requires 12mm & 17mm A/F spanners.

CE/8635_ Collet ext. 8mm shank & 1/4" collet	_£47.49
CE/88_ Collet ext. 8mm shank & 8mm collet	£47.49
CE/CNS/8/635 Collet ext. nut set 1/4" (6.35mm)	£23.69
CE/CNS/8/8 Collet & nut set 8mm	£23.69
CE/NUT/8Spare collet nut	£8.35



Insert rings removed for clarity.

#### 12MM & 1/2" SHANK

With either a 1/2" or 12mm shank, fitted with a multi-slit spring steel collet & collet nut. Increases cutter spindle length by 50mm. Use at max. speed 18,000 rpm. Max. tool diameter 50mm & max. tool cut length 30mm. Requires 19mm & 22mm A/F spanners.

£28.58



 	pa
CE/127635_ Collet ext. 1/2" shank & 1/4" collet	£66.03
CE/127127	£66.03
Collet ext. 1/2" shank & 1/2" collet	
CE/1212 Collet ext. 12mm shank & 12mm collet	£66.03
CE/CNS/635 Collet & nut set 1/4" (6.35mm)	£46.58
CE/CNS/8Collet & nut set 8mm	£46.58
CE/CNS/12Collet & nut set 12mm	£45.22
CE/CNS/127	£46.58
CLT/NUT/T10Spare collet nut	£11.06

#### **FIXING KITS**

For fitting routers to self-made router tables and accessories.



Pan Head	
Pack comprising:	
M4x10mm4 off	
M4x12mm4 off	
M5x16mm4 off	
M5x20mm2 off	
M6x16mm3 off	
M6x30mm3 off	
LINE10v1/2" 3 off	

M6 nut & washer 3 off **FIX/KIT/1** \_ £3.13

Countersink Head	
Pack comprising:	
M4x12mm	_3 off
M5x10mm	_4 off
M6x10mm	_2 off
M6x12mm	_3 off
M6x16mm	_2 off
M6x25mm	_3 off
M6x35mm	_3 off
M6 nut & washer	_3 off

**FIX/KIT/2** \_\_\_\_£3.13



Unibase Fixings	
Pack comprising:	
2BAx1/4" countersink2	off
M4x10mm pan head4	off
M4x12mm pan head4	off
M5x16mm pan head4	off
M5x20mm pan head2	off
M6x12mm pan head2	off
M6x16mm pan head3	off
M6x30mm pan head3	off
No.10 UNFx1/2" pan head _3	off
M6 washer3	off
M5 nut2	off
M6 nut3	off
FIX/KIT/3 £3.	13

#### **MAGNET PACK**

These magnets are nickel plated and incredibly strong, making them ideal for a variety of workshop applications with endless possibilities.


MAG/PACK/2	_£8.11
Pack of four magnets	
Size: 10 x 3mm	
MAG/PACK/1	_£9.51
Pack of four magnets	

Size: 15 x 3mm





# **HOSES & CONNECTIONS**



HOSES & CONNECTIONS: Product Ref. Price

Offered to fit a multitude of extraction equipment. Bayonets may be required

1. OD 37mm, ID 30mm x 3 metre (light duty) £31.74

2. OD 38mm, ID 32mm x 3 metre (heavy duty)

3. OD 105mm, ID 100mm x 3 metre HOSE/105X3

4. Hose cuff

To join hoses together which have the same diameter. Can also be used to fit to dust spouts. Joins 38mm OD hoses together.

HOSE/CUFF/38 £9.80

Plastic bayonet
Designed to fit hoses to extraction fittings. Fits hose 38mmØ OD. OD 45/39mm, ID 34/32mm.

HOSE/BAY/35 £12.59

Stepped bayonet Ideal when a custom connection is required. Can be cut to size with a knife. OD 54mm/39mm, ID 48mm/33mm.

HOSE/BAY/STEP £13.23







£63.93







# UNIVERSAL ROUTER SAFETY STAND. **ROUTER POD**

For use with jigs and templates when a guide bush is fitted to the router base.

- · Prevents laying of router on side or head.
- · Ideal for use when cutter depth is set with a fine height adjuster.
- U-shape design to allow easier router fitting.
- Rubber feet for anti slip.
- · Stack double for extra long cutters.
- · Prevents cutter damage to workbench.
- · Made from ABS plastic.

**R/POD/A** £8.54









# **DEPTH GAUGE**

Metal rule depth gauge to help set the height of router cutters and sawblades with greater accuracy.

- · Horizontal and vertical measuring.
- For hand routers, router tables and saw benches.
- 60mm wide aperture and accurate to 0.5mm.
- 80mm measurement range.
- U section plastic injection moulding with unique cam lever lock.
- Steel rule with dual metric and imperial scale.
- Self-standing for setting cutter depth on routers tables and low profile for backfence adjustment.

**GAUGE/1** £9.80








Horizontal depth





**HOW IT WORKS:** Example steps to create a











# DIGITAL DEPTH GAUGE

LCD depth gauge for setting tool height in a plunge router, router table and saw bench.

• Opening width 60mm and 80mm measuring range.

· Metric, imperial and fraction read-out with auto-shut off of LCD.

• Removable pin for hole depth measuring up to 50.8mm.

• Readout accuracy of +/- 0.1mm.

· Self standing with magnetic feet.

· Includes 3 volt CR2032 battery.

Absolute and relative position functions.









# **JOINTING ACCESSORIES & SEALS**

#### **WOODEN BISCUITS**

Biscuit jointing has proven to be one of the strongest, fastest, safest and most accurate ways to join hardwoods and softwoods, plywood, composition board etc. Compared to dowelling, biscuit jointing is faster and more precise. The biscuits are made of die-cut beech which expands when in contact with a woodworking adhesive eg. PVA glue.





For certified biscuits see our website

For board thickness 8 - 12mm Size: 47.5 x 15.5 x 4.0mm

**BSC/0/100** (qty 100) £7.81

BSC/0/1000 (qty 1000) £31.74

For board thickness 13 - 18mm Size: 53 x 19 x 4.0mm

**BSC/10/100** (qty 100) \_£7.81 BSC/10/1000 (qty 1000)£33.09

#### No.20

For board thickness 19mm+ Size: 60 x 23 x 4.0mm

**BSC/20/100** (gty 100) £7.81 BSC/20/1000 (qty 1000)£34.39

No.0. 10 & 20

Qty No.0 x 30, No.10 x 30 & No.20 x 40

BSC/MIX/100 (qty 100) £7.81

Qty No.0 x 250, No.10 x 250 & No.20 x 500

BSC/MIX/1000(qty 1000) £33.09

# 100MM **BISCUIT JOINTING BLADES**

• Six Tungsten Carbide Teeth.

· Anti-kickback tool design for safer use.

• Suitable for natural timbers, particle and MDF boards. • Standard 100mm diameter x 22mm bore x 4mm kerf.

TCT

# CR/BJB100T

## £20.76

Thin body for Trend, Freud, Casals & Dewalt DW682. Plate thickness 2.5mm

# CR/BJB100

£31.11

Bossed body, plate thickness 3mm (3.4mm with boss).



### **WOODEN DOWELS**

Multi-grooved kiln dried hardwood dowel pins. Suitable for joining chipboard and MDF panels in the production of cabinet carcasses and doors. The grooves in the dowels allow for gluing up. Three diameters available.









#### DOWEL CENTRE POINTS

Six pack of metal dowel centres that fit into blind holes to allow lining up of the mating hole for wooden dowels. Pairs of 6mm, 8mm and 10mm diameter dowel centres. Place end of dowel centre into holes drilled in one piece of wood. Place second piece of wood in required position and press to leave centre mark for the hole.







# **WEATHERSEALS**


DWL/5/500

£32.03

# AQUA 63 & P6 STYLE STRIP

500


Strip is fitted into the window frame aperture using four cut lengths. Groove created by Refs. 330, 331, 34/55 and C206. See page 66 and 109.



Colour	Approx. length metres	Product Ref.	Price
White	10	AQ63/W/10	£18.79
White	25	AQ63/W/25	£43.15
Brown	10	AQ63/B/10	£18.79
Brown	25	AQ63/B/25	£43.15

#### **AQUA 21 & A10 STRIP**


Strip is fitted into the door frame rebate (head and jambs) as three cut pieces forming a compression or wiping seal. Groove created by Refs. 334, 34/56 and C207. See page 66 and 109.



Colour	Approx. length metres	Product Ref.	Price
White	10	AQ21/W/10	£28.58
White	25	AQ21/W/25	£66.69
Brown	10	AQ21/B/10	£28.58
Brown	25	AQ21/B/25	£66.69

#### **ROUTASEAL STRIP**

High grade silicon rubber weatherseal. Will stand temperature of -30° to +200°C. Groove created by Ref. 31/10L. See page 67.



Colour	Approx. length metres	Product Ref.	Price
White	25	RS/W/25	£85.49
Brown	25	RS/B/25	£85.49

capacities and sizes to match the shanks of Trend cutters and arbors.



With type 1 and type 4 collets, ensure the collet is fitted to collet nut before fitting to the router.

Illustrations do not show actual size and are only diagrammatic.

		6.35MM (1/4") COLLET			8MM COLLET			12.7MM (1/2") COLLET		
Makes	Router Models		Product Ref.	Price		Product Ref.	Price		Product Ref.	Price
	<u>T4</u>	3	CLT/T4/635	£5.30	3	CLT/T4/8	£5.30			
TREND	T5, T5/MK2	4	CNS/T5/635	£20.60	4	CNS/T5/8	£20.60			
	<u>T7</u>	1	CLT/SLV/63127	£11.92	4	CLT/T7/8	£9.95	1	CLT/T7/127	£9.95
	T10 & T11	1	CLT/T10/635	£30.56	- 1	CLT/T10/8	£30.56	1	CLT/T10/127	£30.56
ATLAS COPCO	OFSE2000	4	CE/CNS/635	£46.58	4	CE/CNS/8	£46.58	4	CE/CNS/127	£46.58
BOSCH	GOF1300ACE, 2000E	1	CLT/SLV/63127	£11.92	1	CLT/SLV/8127	£11.92			
	GOF1600A,1700ACE	1	CLT/SLV/63127	£11.92	1	CLT/SLV/8127	£11.92			
CASALS	FT2000VCE	4	CE/CNS/635	£46.58	4	CE/CNS/8	£46.58	4	CE/CNS/127	£46.58
OMT	CMT1E	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92	1	CLT/T10/127	£30.56
CMT	CMT2E	1	CLT/T10/635	£33.15	1	CLT/T10/8	£33.15	1	CLT/T10/127	£30.56
	DW624, 625EK, 629	1	CLT/T10/635	£30.56	1	CLT/T10/8	£30.56	4	CE/CNS/127	£46.58
DEWALT	D26204K	4	CNS/T5/635	£20.60	4	CNS/T5/8	£20.60		-	
	DW626	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92		-	
DRAPER	R1900V	4	CE/CNS/635	£46.58	4	CE/CNS/8	£46.58	4	CE/CNS/127	£46.58
ELU	MOF77, 98, 131, 177, 177E	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92	4	CE/CNS/127	£46.58
FESTO	OF2000E	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92	4	CE/CNS/127	£46.58
FELISATTI	TP246(E), R346EC	1	CLT/SLV/635	£33.15	1	CLT/SLV/8	£33.15			
FREUD	FT2000E, FT2200, FT3000	4	CE/CNS/635	£46.58	4	CE/CNS/8	£46.58	4	CE/CNS/127	£46.58
HITACHI	M12V, M12SA, TR12	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			
HITACHI	M12V2	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			
MAKITA	3600B, 3601B	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			
WANTA	3612BR, 3612C, 3612	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			
POWER CRAFT	PBF-1200	3	CLT/T4/635	£5.30	3	CLT/T4/8	£5.30			
	ERT2100	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			
RYOBI	R150, R151, RE155K	2	CLT/SLV/638	£8.35						
	R500, R502	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			
	RE600N, R600N, RE601	2	CLT/SLV/63127	£11.92	2	CLT/SLV/8127	£11.92			

### REDUCTION **SLEEVES**

Reduction sleeves are used to reduce the collet size to take cutters with smaller shanks.

They should only be used as a stop-gap, as the correct size collet is recommended. They should not be used for extensive periods or heavy work



Bore (to fit Shank)	D (to fit Collet)	OL mm	Product Ref.	Price
3.0mm	1/4"	25.0	CLT/SLV/363	£15.35
1/8"	1/4"	25.0	CLT/SLV/3263	£17.43
6.0mm	8.0mm	25.0	CLT/SLV/68	£8.35
1/4"	8.0mm	25.0	CLT/SLV/638	£8.35
1/4"	3/8"	25.0	CLT/SLV/6395	£8.35
8.0mm	3/8"	25.0	CLT/SLV/895	£11.92
6.0mm	10.0mm	25.0	CLT/SLV/610	£11.92
8.0mm	10.0mm	25.0	CLT/SLV/810	£11.92
6.0mm	12.0mm	30.0	CLT/SLV/612	£11.92

Bore (to fit Shank)	D (to fit Collet)	OL mm	Product Ref.	Price
1/4"	12.0mm	30.0	CLT/SLV/6312	£11.92
8.0mm	12.0mm	25.0	CLT/SLV/812	£11.92
10.0mm	12.0mm	25.0	CLT/SLV/1012	£11.92
6.0mm	1/2"	30.0	CLT/SLV/6127	£11.92
1/4"	1/2"	30.0	CLT/SLV/63127	£11.92
8.0mm	1/2"	30.0	CLT/SLV/8127	£11.92
3/8"	1/2"	30.0	CLT/SLV/95127	£11.92
10.0mm	1/2"	30.0	CLT/SLV/10127	£11.92

Product

# JIG MAKING ACCESSORIES

For wood Ref INS/W

#### THREADED INSERTS

For fixings in plastics, woods, man-made boards and fibre board eg. MDF. They have enlarged flange ends to prevent them from 'pulling out' after continual usage and need to be located from the underneath. Ideal for jig making.

INS/P6 INS/P8 For hard plastic eg. Tufnol®. Ref. INS/P6 inserts have slots on the base and Ref. INS/P8 inserts have slots on the nose



Underside shown

PRONGED TEE NUTS A strong, reliable and easy to fix low cost anchor for wood and fibre board. Simply insert into a pre-drilled hole and hammer gently into place.



	поіе	IIIIeau			Product	
Description	Size	Size	Hex Key	Qty	Ref.	Price
For wood	9mm	M6	6mm	10	INS/W6/10	£4.89
For wood	9mm	M6	6mm	50	INS/W6/50	£16.67
For wood	11mm	M8	8mm	10	INS/W8/10	£7.02
For wood	11mm	M8	8mm	50	INS/W8/50	£24.34
For plastic	8mm	M6	-	10	INS/P6/10	£5.55
For plastic	8mm	M6	-	50	INS/P6/50	£23.18
For plastic	9.5mm	M8	-	10	INS/P8/10	£8.35
For plastic	9.5mm	M8	-	50	INS/P8/50	£35.46
8mmØ drill hole	-	M6	-	10	PTN/6/10 +	£5.39
8mmØ drill hole	-	M6	-	50	PTN/6/50 +	£18.89
10mmØ drill hol	e -	M8	-	10	PTN/8/10 +	£6.17

# PROFESSIONAL KEYS, KNOBS & LEVERS


**1 HEAVY DUTY LOBE KNOBS** 

Reinforced plastic. Male has steel stud, female has brass insert. Suitable when a strong clamping action is required.

**HEAVY DUTY ADJUSTABLE LEVERS** 

Reinforced plastic lift and lock ratchet system. Male has steel stud, female has steel insert. Suitable when lever turning angle is limited.





	Threa	d	Length	Qty	Н mm	mm	Product Ref.	Price
	Male	M6	20	2	23	32	KB5/M/6	£5.55
)	Male	M8	35	2	27	40	KB6/M/8	£6.36
	Female	M10	-	2	32	50	KB10/F/10	£9.14
١	Male	M6	30	1	28	42	KB11/M/6	£6.36
,	Male	M8	35	1	36	63	KB12/M/8	£7.02
	Male	M10	40	1	45	80	KB13/M/10	£9.80

#### **HEAVY-DUTY DOUBLE-SIDED TAPE**

Heavy duty tape, ideal where temporary fixing is required. Rayon cloth coated with rubber resin adhesive for a strong hold. Can be removed with your thumb. Size: 25mm x 25 metre.







# HAND MITRE SHEARS

For perfect mitre cuts of mouldings, beadings and weatherseals.

HAND MITRE SHEAR WITH CHROME VANADIUM BLADE


- For trimming seals and delicate dolls house moulding beads.
- Suitable for synthetic, PVC, latex and wood.
- 45° angled wings with engraved lines at 45°, 60°, 75°, 90°, 75° and 60°
- For cutting beading up to 10mm thick.
- Maximum thickness at 90° is 10mm.
- Maximum length of cut at 45° is 50mm.
- Spare blades available.

**HM/SHEAR** £54.24

Length 225mm, weight 335g.

SPARE PARTS: Product Ref. Price £17.47 Blade





HAND MITRE SHEAR WITH REPLACEABLE

TRAPEZOIDAL BLADE

• For trimming seals and beads.

- Suitable for synthetic, PVC, latex and wood.
- Trapezoidal blade (Stanley® style) fitting.
- 45° angled wings with engraved lines at 45°, 60°, 75°, 90°, 75°, 60° and 45°
  - Maximum thickness at 90° is 7.5mm.


Fitted with one blade only.

Maximum length of cut at 45° is 50mm.

**HM/SHEAR/A** £54.24 Length 210mm, weight 380g.







Dowels

# **GIFT VOUCHERS**

Available in £5, £10 & £20 denominations.

- Give a woodworker or DIY friend or relative the freedom and flexibility of a Trend gift voucher.
- Vouchers are supplied in a presentation sleeve and are redeemable at Trend stockists for any Trend product.



To order gift vouchers visit: www.trend-uk.com/voucher

Terms and conditions apply.

# **ROUTING BOOK**

'Complete Routing' by Alan Holtham, an essential read for the amateur or the experienced router user.

Full of easy to read routing techniques and step by step guides on how to use your router to its full potential. With only a little experience you will soon be using the router to transform both the making and the detail of all your woodworking projects.

Includes four step by step projects for all abilities:

- · Bathroom cabinet
- Occasional table
- Bathroom storage rack
- Settle seat

**BOOK/CR** £20.16

(VAT exempt)



# **WOODWORKING ACCESSORIES**







# **DRILLING TOOLS**

POCKET HOLE JIGS	200-203
DRILLING TOOLS	204-206
MULTI-BORING DRILL	207

# **CLAMPING & MEASURING**

VARIJIG CLAMP GUIDES	208-209
ROLLER STAND	210
CLAMPING SYSTEMS	210-211
ANGLE FINDERS	212-214
SCRIBING TOOLS	215

# **SHARPENING**

DIAMOND SHARPENING STONES	216-219
FASTTRACK MK2	220-221
DIAMOND CROSS SHARPENING	220-222
CRAFTPRO DIAMOND STONES	223

TOOL STORAGE	NEW
PRO STORAGE RANGE	228-229
COMPACT STORAGE RANGE	230-231
TOOL BAG RANGE	232

# ROLLER STAND NEW



# FASTTRACK MK2





# **SPECIFICATIONS:**

PRODUCT DESCRIPTION	SINGLE POCKET HOLE JIG	MINI POCKET HOLE JIG	3-IN-1 POCKET HOLE JIG	POCKET HOLE JIG	PRO POCKET HOLE JIG
MATERIAL THICKNESS MIN.	12.7mm	16mm	12.7mm	16mm	12.7mm
MATERIAL THICKNESS MAX.	38mm	38mm	38mm	38mm	38mm
HOLE PITCH		18mm-54mm	28mm-50mm	29mm-63mm	30mm
DRILL DIAMETER	9.5mm	9.5mm	9.5mm	9.5mm	9.5mm
SQUARE DRIVE BIT SIZE	No.2	No.2	No.2	No.2	No.2
SCREW SIZE	No. 7 x 30mm, 6 x 25mm, 7 x 25mm, 7/8 x 30mm, 8 x 37mm, 8 x 50mm, 8 x 63mm	No. 7 x 30mm	No. 7 x 30mm, 6 x 25mm, 7 x 25mm, 7/8 x 30mm, 8 x 37mm, 8 x 50mm, 8 x 63mm	No. 7 x 30mm	No. 7 x 30mm, 6 x 25mm, 7 x 25mm, 7/8 x 30mm, 8 x 37mm, 8 x 50mm, 8 x 63mm
FACE CLAMP REQUIRED	<b>✓</b>	<b>✓</b>	<b>✓</b>	<b>✓</b> Supplied	<b>✓</b> Supplied
DUST EXTRACTION SPOUT					<b>✓</b>
QUICK RELEASE HANDLE				<b>✓</b>	<b>✓</b>
UNDERSIDE T SLOT					12.2/8.4mm x 6mm
REMOVABLE BASE FOR FLUSH WORK	✓	<b>✓</b>	<b>✓</b>		<b>✓</b>
STORAGE DEVICE	Вох	Вох	Case	Вох	Bag

# PRO POCKET HOLE JIG NEW

For fast and accurate joining of timber and plywood giving strong instant joints.

- Adjustable height to allow material from 12.7mm to 38mm to be jointed.
- Solid hardened bushes with fixed pitch of 30mm.
- Use on timber, MDF, plywood and blockboard.
- Workpiece support and end stop.
- Quick and easy drill bit depth setting turret.
- Dust extraction spout.
- Square drive self tapping screws for use with a No.2 square drive bit to resist slipping (cam out).
- · Workpiece can be handled immediately after gluing & screwing creating time saving benefits.
- · No clamps required.

# **PH/JIG/AK** £144.15








Adjustable Height



Removable Base



Drill Depth Gauge



EXTRACTION SPOUT

#### INCLUDES:

100 x Dome head screws

10 x No.7 x 25mm coarse

30 x No.7 x 30mm fine 30 x No.7/8 x 30mm coarse

10 x No.8 x 38mm coarse

10 x No.8 x 50mm coarse

10 x No.8 x 63mm coarse

1 x Face clamp

1 x HSS drill bit with collar

1 x 75mm Square drive bit 1 x 150mm Square drive bit

2 x Hex key



#### SPECIFICATION:

Material thickness min.	12.7mm	Square drive bit size		No.2
Material thickness max.	38mm	Screw size	No.6 x 25mm, N	No.7 x 25mm,
Material width min.	38mm		No.7 x 30mm, No.	.7/8 x 30mm,
Hole pitch	30mm	No.8 x 37mr	m, No.8 x 50mm, N	No.8 x 63mm.
Drill diameter	9.5mm			

# POCKET **HOLE JIG**

For fast and accurate joining of timber and plywood giving strong instant joints.

- Solid hardened bushes, with variable pitch of 29mm to 63mm.
- Use on timber, MDF, plywood and blockboard.
- · Allows a variety of joints to be created individually.
- Uses square drive self tapping screws.
- · Workpiece can be handled immediately after gluing and screwing creating time saving benefits.
- No clamps required.

# **PH/JIG** £78.51

#### **INCLUDES:**

100 x Dome head screws

1 x Face clamp

1 x HSS drill bit with collar

1 x 75mm Square drive bit 1 x 150mm Square drive bit

2 x Hex key





No.7 x 30mm

Hole pitch

29mm-63mm

Screw size

3 IN 1 POCKET HOLE JIG NEW

Multi-function pocket hole jig for fast and accurate joining of solid timber and sheet material in single or multiple fixing positions.

- · Hardened drilling sleeves for accurate, consistent pockets.
- · Works with timber thicknesses from 12.7mm to 38mm.
- Multi-function design for twin hole or single hole pockets.
- · Perfect for wide or for narrow stock components.
- · Portable and adaptable for multiple jointing styles and applications.
- Reversible depth gauges, ideal for new projects and repair work.
- Build cabinets, furniture, and small joinery projects with ease.
- · Tool free, fast and easy set up.
- Built in drill depth gauge.
- Supplied with drill, driver bit and a selection of screws.
- · Ideal for jointing in hard and softwoods and sheet materials.

**PH/JIG/BK** £46.30







VIDEO

WATCH

trend-uk.com/video



50 x Assorted Screws

1 x HSS drill bit with collar 1 x 150mm Square drive bit

1 x Adapter plate

1 x Hex key 3mm A/F

1 x Carry case



#### SPECIFICATION:

Material thickness min. 12.7mm Material thickness max 38mm Hole pitch 28mm-50mm Drill diameter 9.5mm


Square drive bit size Screw size No.6 x 25mm, No.7 x 25mm, No.7 x 30mm, No.7/8 x 30mm, No.8 x 37mm, No.8 x 50mm, No.8 x 63mm.

SINGLE POCKET HOLE JIG NEW

Multi-function pocket hole jig for fast and accurate joining of solid timber and sheet material in single or multiple fixing positions.

- · Hardened drilling sleeves for accurate, consistent pockets.
- Works with timber thicknesses from 12mm to 38mm.
- · Perfect for single or multiple fixing positions in wide or narrow stock components.
- · Reversible depth gauges, ideal for new projects and repair work.
- Build cabinets, furniture, and small joinery projects with ease.
- Tool free, fast and easy set up with built in drill depth gauge.
- Supplied with drill, driver bit and a selection of screws.
- Ideal for jointing in hard and softwoods and sheet materials.

**PH/JIG/BS** £23.95



#### SPECIFICATION:

Material thickness min.	12.7mm
Material thickness max.	38mm
Drill diameter	9.5mm
Square drive bit size	No.2

Screw size No.7 x 30mm, No.7/8 x 30mm, No.8 x 37mm, No.8 x 50mm, No.8 x 63mm



trend-uk.com/video

1 x Carry case

For fast and accurate joining of timber and plywood giving strong instant joints.

- · Supplied with two bases, long base with stop for standard pocket hole jointing or short base for repair work of an assembled component.
- The flush short base also allows screws to be centred on the material thickness.
- Adjustable pitch centres from 18mm to 54mm.
- Use on timber, MDF, plywood and blockboard.
- Workpiece can be handled immediately after gluing.
- · Compact size ideal for use on site.

# **PH/JIG/M** £41.38

INCLUDES:							
1 x	Long base						
1 x	Short base						
50 x	Dome head screws						
1 x	HSS drill bit with collar						
1 x	150mm Square drive bit						
2 x	Hex key						

#### SPECIFICATION:

Material thickness min.	16mm
Material thickness max.	38mm
Material width min.	38mm
Hole pitch	18mm-54mm
Drill diameter	9.5mm
Square drive bit size	No.2
Screw sizes	No. 7 x 30mm







# POCKET HOLE JIG ACCESSORIES



# DRILLING TOOLS

Our range of drilling tools include: twist drills, dowel drills, countersinks, counterbores, plug makers, machine bits and forstner bits.

• Grades and sizes are geared to satisfy the demanding needs of the building industry, joinery trades and workshops.

• High quality and performance are the prime considerations in the design of our tooling which is manufactured using the latest technology.



High Speed Steel Tooling
Produced entirely in HSS, ground with a very fine edge. Suitable only for non-abrasive materials, but will give a superior finish in soft timbers. Slightly less expensive than TCT, but is more suitable for certain applications i.e. drilling or cutting non-abrasive timbers & plastics.

Tungsten Carbide Tipped Tooling
Tips are brazed onto a steel body. For use with the most abrasive materials and will outlast HSS tooling by many times. Applications include cutting or drilling natural timbers, plywood, medium density fibre board, chipboard and abrasive plastics.

Carbon Steel Tooling
Less durable than HSS, WS is extensively used in the production of forstner and countersink tooling for use on natural timbers. Offers a cost effective solution for many applications.



Can be flipped 180°

to act as a


depth stop

# DOMINO BITS

- . Two flute spiral slotting tools for use with the Festool® Domino DF500 dowel mortising system.
- Creates pockets for Domino dowels.
- · Female threaded shank.
- Double spiral up-cut.
- Tungsten Carbide Tipped for abrasive materials and is ideal for timber and man-made boards.

Prod. Ref. Drill Size		ICI
DOM/04	4mm	£24.94
DOM/05	5mm	£22.81
DOM/06	6mm	£23.34
DOM/08	8mm	£23.88
DOM/10	10mm	£27.06





A	C	OL	Product	TCT
Deg.	mm	mm	Ref.	
45°	12.0	32.0	UNI/CS	£23.69

# **COUNTERSINKS UNIVERSAL COUNTERSINK**

- Clamps onto any drill between 3.0mm and 7.2mm in dia.
- Recommended for wood and man-made boards.
- By reversing the countersink on the drill, it can be used as a non-cutting depth stop.
- The drill passes through the body of the countersink and is secured by two hex screws which clamp the countersink onto the drill at the required position.
- Ensure flutes of drill are aligned with flutes of countersink.
- Do not overtighten screw.

Screw Sizes:

 $No.10 = 5.0 mm\emptyset$ 

No  $12 = 5.5 \text{mm} \varnothing$  $No.14 = 6.5 mm \emptyset$ 

= 3.0mmØ

= 3.5mmØ

= 4.0mmØ

No.4

No.6

No.8

Not suitable for production applications and not suitable for ferrous and non-ferrous metals.

Not for use with routers.




Chart showing	recommended	drill	and	screw	sizes
---------------	-------------	-------	-----	-------	-------

	F	or Wood So	Fo	r Machine	Screw		
Screw Gauge No.	Drill Size (Clear Hole) inch	Drill Size (Clear Hole) mm	C/bore (Resulting) inch	C/bore (Resulting) mm	Screw Size mm	Drill Size (Clear Hole) mm	C/bore (Resulting) mm
4 & 5	1/8	3.2	7/16	11.1	M2.5	3.0	11
6 & 7	5/32	3.96	31/64	12.3	M3	3.5	11.5
8 & 9	3/16	4.76	33/64	13.1	M3.5	4.0	12.1
10	7/32	5.55	17/32	13.49	M4	4.5	12.9
12 & 14	1/4	6.35	9/16	14.28	M4.5	5.0	13.1
16	9/32	7.14	39/64	15.47	M5	5.5	13.5
-	-	-	-	-	M5.5	6.0	14.1
-	-	-	-	-	M6	6.5	14.5
-	-	-	-	-	M7	7.2	15.3



Drill bit not

included.

Fully

adjustable

to 7.2mm.

TCT for

long life

# SHELL COUNTERSINK 90°

- Produced from best grade carbon steel leaving a clean cut finish by virtue of a multi-tooth deep ground gullet.
- Fit metric drills from 3.0mm to 12.0mm dia. inclusive.
- Not suitable for abrasive materials or metal Drill bit not included.



11				
	D2 mm	D mm	Product Ref.	WS
	3.0	16.0	620/3	£9.51
$\square$	4.0	16.0	620/4	£9.80
YΛ	5.0	16.0	620/5	£9.80
[/]	6.0	16.0	620/6	£12.59
- D2	8.0	20.0	620/8	£13.91
HD-I				

# **ROSE 90° COUNTERSINKS**

- For use in power drills and stationary drill machines only.
- These countersinks are produced in HSS and should not be confused with carbon steel types.
- They are designed for countersinking mild steel, iron and plastics.

Countersink for Window Industry, see Ref. 49/50 on page 81.



					<b>33</b>
	D C/sink mm	No. of Flutes	Product Ref.	Shank 1/4"	Diameter 10mm
	12.5	5	49/70	£21.57	-
HDH	20.0	5	49/71	-	£30.56

Ref. 620/6

Ref.

#### **COUNTERSINK SETS**

- Drill & countersink simultaneously a wide variety of materials.
- Supplied with HSS slow spiral drill bits.
- Fully adjustable, hex key is supplied.
- The TCT version is used for plywood, particle boards & plastics (abrasive).
- Use at drilling speeds only. Not suitable for ferrous & non-ferrous metals. Please ensure drill flutes are aligned with flutes of countersink.
- For replacement Twist Drills, use slow spiral type e.g. Refs. 501/18 to 501/14. Sizes No.4 & No. 6 have a shouldered body.



Wood Screw Size No.	D2 Drill Dia. inch	D2 Drill Dia. mm	D Dia. inch	D Dia. mm	Product Ref.	HSS	TCT
4	1/8	3.2	1/2	12.7	6200/4	£16.03	£26.47
6	5/32	3.96	1/2	12.7	6200/6	£16.00	£23.69
8	3/16	4.76	5/8	15.9	6200/8	£16.00	£25.79
10	7/32	5.55	5/8	15.9	6200/10	£17.47	£26.47
12	1/4	6.35	5/8	15.9	6200/12	£16.96 +	£26.47

#### COUNTERBORE SETS

- Extensively used for recessing bolt & screw heads.
- Supplied with HSS slow spiral drill bit.
- Fully adjustable, hex key is supplied.
- The TCT version is used for plywood, particle boards & plastics (abrasive).
- Use at drilling speeds only. Not suitable for ferrous & non-ferrous metals. When setting-up, ensure flutes of drill are aligned with flute of counterbore.
- For replacement Twist Drills, use slow spiral type, e.g. Refs. 501/532 to 501/14.



D2 Drill Size inch	D2 Drill Size mm	D c/bore Dia. inch	D c/bore Dia. mm	Product Ref.	TCT
5/32	3.96	3/8	9.5	CB38-532	£32.68
3/16	4.76	3/8	9.5	CB38-316	£32.68
3/16	4.76	1/2	12.7	CB12-316	£34.14
1/4	6.35	1/2	12.7	CB12-14	£35.46
1/4	6.35	-	16	CB58-14	£36.14
1/4	6.35	3/4	19.1	CB34-14	£37.57

### SLOW SPIRAL TWIST DRILLS

- Slow spiral is sometimes preferred for drilling end grain in wood.
- · Ideal for fast drilling operations in open grained material.
- Not for use with routers and not suitable for masonry work.


$\prod$	D inch	D mm	OL mm	Product Ref.	HSS	D inch	D mm	OL mm	Product Ref.	£8.35 £16.96 + £23.00
$M \perp$	1/8	3.2	65.0	501/18	£3.85	1/4	6.35	92.0	501/14	£8.35
OL	5/32	3.96	74.0	501/532	£3.85	3/8	9.5	134.0	501/38 +	£16.96
YA 🗆	3/16	4.76	85.0	501/316	£5.30	7/16	11.11	144.0	501/716 -	+ £23.00
$\forall$	7/32	5.55	93.0	501/732	£5.96					

# SAW TOOTH FORSTNER BITS

- Saw tooth forstner bits are made from high grade Carbon Steel and meticulously heat treated.
- They cut fast, with the grain or across it. • They can drill overlapping holes in any direction

and are chosen for exacting and delicate work, such as scroll and scalloping operations. Suitable for non-abrasive timber.

· Please see website for recommended speeds.



- D



SHORT	SERIES
_	_

Blade B

Dia. inch	mm	inch	Length	Ret.				-		
3/8	6.35	1/4	3-1/2	1307/38	£16.67	LONG SE	RIES			
1/2	6.35	1/4	3-1/2	1307/12	£16.67	D	S	Overall	Product	WS
3/4	9.5	3/8	3-1/2	1307/34 +	£18.89	Dia. inch	inch	Length	Ref.	
7/8	9.5	3/8	3-1/2	1307/78 +	£20.94	1/2	1/2	4-3/4	1306/12	£18.79
1	9.5	3/8	3-1/2	1307/1	£23.69	7/8	1/2	5	1306/78	£23.69
1-1/8	9.5	3/8	3-1/2	1307/118 +	£27.75	1	1/2	5-1/4	1306/1	£25.79
1-1/4	9.5	3/8	3-1/2	1307/114	£31.36	1-1/8	1/2	5-1/4	1306/118 +	£28.39
1-3/8	9.5	3/8	3-1/2	1307/138	£32.68	1-1/4	1/2	5-1/4	1306/114	£34.14
1-1/2	9.5	3/8	3-1/2	1307/112	£38.91	1-1/2	1/2	5-3/4	1306/112 +	£38.54
1-5/8	9.5	3/8	3-1/2	1307/158	£42.49	1-5⁄8	1/2	5-3/4	1306/158 +	£49.34
2	9.5	3/8	3-1/2	1307/2	£52.80	2	1/2	6	1306/2	£57.03

# ADJUSTABLE MACHINE **BIT - LIGHT DUTY**

- Supplied with two interchangeable blades offering a range of drilling sizes from 15mm to 45mm.
- Made from specially hardened Carbon Steel.
- Suitable for soft timbers only.
- · Use at low speeds only.
- Not for use with hand held power tools or routers.

Adjustable Drilling Sizes	D min. mm	D max. mm	Product Ref.	WS	
Blade A	15.0	25.0		000.45	
Blade B	25.0	45.0	349	£28.45	
REPLACEMEN	NT PART	S			
Blade A			SP-349A	£7.94	
Blade B			SP-349B	£8.35	
61		P			



Blade A



Overall

Product

# **PLUG MAKERS**

- Precision made plug makers for use on natural timber, exactly matching the holes produced by the saw tooth Forstners groups 1306 & 1307.
- · These have four, five or six wings to ensure a clean cut.
- Use a slow, constant feed rate ensuring timber is clamped to bed of drilling machine.
- 5-1/2" to 6-1/2" overall lengths.
- Not suitable for use on abrasive timber, hard
- Not for use with hand held power tools or routers.



Wing design

Ref. 2214/78	D Plug Dia. inch	S inch	No. of Wing	Max. Speed RPM	Product Ref.	WS
101	3/8	1/2	4	2000	2214/38	£55.24
-   S  -	1/2	1/2	4	1500	2214/12	£60.85
, , ,	3/4	1/2	4	1000	2214/34	£70.13
Щ	1	1/2	5	800	2214/1	£78.06
	1-1/8	1/2	5	800	2214/118	£82.05
	1-1/4	1/2	5	800	2214/114	£84.69
	1-1/2	1/2	5	500	2214/112 +	£98.92
l	1-5/8	1/2	6	500	2214/158	£91.31
	1-7/8	1/2	6	500	2214/178	£102.81

# **MACHINE BITS**

# MACHINE BITS FOR HINGE SINKING

• These machine bits are typically used by kitchen furniture manufacturers for recessing circular hinges.

#### • Group 104

This type with scribers are used on natural timber, particle boards and veneered MDF.

#### • Group 421

This type without scribers are for laminate covered boards.

#### Group T421

This hinge sinker is best suited for thinner laminate covered boards.


#### • Group T420 TCT

This economy range is supplied without scribers and are used for recessing holes in melamine covered chipboard.

#### Ref. T420 WS

This economy tool is supplied with scribers and centre point and is used for recessing holes in softwoods.

- Use sizes above 25.0mm at recommended speed range 1,000 - 3,000 RPM maximum to avoid burning.
- Use with pillar drills only.








Head	D OL P		Product	TCT	
Design	mm	mm	Ref.	1/4"	3/8"
Two wings,	25.0	65.0	104/25	-	£48.04
two scribers & centre point	35.0	65.0	104/35	£50.00	£48.71
Two wings,	20.0	60.0	421/20	-	£34.02 +
no scribers	26.0	65.0	421/26	-	£34.62 +
& centre point	35.0	65.0	421/35	£41.69	£41.69
Two wings & no centre point	35.0	45.0	T421/35	£24.34	-
	CR	AFTP	RO		

	TOT			
Head Design	D mm	OL mm	Product Ref.	TCT 8mm
Two wings & centre	35.0	57.0	T420/35	£11.25
point				

	CRA	FTPR	D	WS
Head Design	D mm	OL mm	Product Ref.	8mm
Two wings & centre point	35.0	54.0	T420/35	£7.26





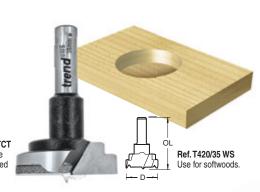


### TAPERED PLUG MAKER

 A tapered plug ensures an exceptionally tight fit is achieved.

 Tapered plug cutters with Tungsten Carbide Tips will produce many hundreds of plugs before re-sharpening is required.

For use in drilling machines at a recommended speed of 2,000 RPM (max. 3,000 RPM). Material must be well clamped.





d Suitable for Hole Size inch	d Suitable for Hole Size mm	C Plug Depth mm	S Shank Dia. inch	Product Ref.	TCT	
1/2	12.7	15.0	1/2	24/1	£78.60	

# **MACHINE BITS LIP & SPUR**

• These machine bits have two wings, two scribers and a centre point.

 Tungsten Carbide Tipped for extensive drilling of particle boards and plastics of soft to medium density.

• The scribes give a very clean entrance hole.



Not for use on hard dense materials, such as laminate covered board, phenolic Tufnol®, Wareite® & GRP. For such materials, choose from **Group 421** tools which have no scribers. For use in drilling machines only.

# **MULTI-BORING DRILLS & BORING BITS**



Left

Hand

IT/2010167

# **DOWEL DRILLS**

- Tungsten Carbide Tipped dowel drills with centre point and two spurs.
- Suitable for drilling blind holes in natural wood and man-made boards (including paper/plastic coated and veneered).
- Drills have a cylindrical shank with flat and length adjusting screw.
- For use on automatic and point-to-point boring machines.
- colour orange.



Lip allu	i opui D	Owel Di	IIIS				
D mm	C mm	S mm	OL mm	Product Ref. Right Hand	Product Ref. Left Hand	Price	
5.0	27.0	10.0	57.5	IT/2010017	IT/2010047	£13.98	
8.0	27.0	10.0	57.5	IT/2010137	IT/2010167	£15.42	
10.0	27.0	10.0	57.5	IT/2010197	IT/2010227	£16.75	
5.0	35.0	10.0	70.0	IT/2010317	IT/2010347	£15.42	
6.0	35.0	10.0	70.0	IT/2010377	IT/2010407	£16.75	
8.0	35.0	10.0	70.0	IT/2010437	IT/2010467	£16.75	
10.0	35.0	10.0	70.0	IT/2010497	IT/2010527	£19.55	

# • Left hand rotation tools can be identified by the

# **THROUGH HOLE DRILLS**

- Tungsten Carbide Tipped dowel drills with V drill point.
- Suitable for drilling tear free through holes in natural wood and man-made boards (including paper/plastic coated and veneered).
- Drills have a cylindrical shank with flat and length adjusting screw.
- For use on automatic and point-to-point boring machines.
- Left hand rotation tools can be identified by the colour orange.



IT/2010137

Right



# **CYLINDER BORING BITS**

- Tungsten Carbide Tipped boring bits with centre point, wo cutting edges and two spurs.
- Suitable for drilling hinge holes in natural wood and manmade boards (including paper/plastic coated and veneered).
- Boring bits have a cylindrical shank with flat and length adjusting screw.
- For use on automatic and point-to-point boring machines.
- Left hand rotation tools can be identified by a red band on the shank.

#### Centre Point and Scribers

D mm	S mm	OL mm	Product Ref. Right Hand	Product Ref. Left Hand	Price
15.0	10.0	57.5	IT/2031007	IT/2031087	£37.78
35.0	10.0	57.5	IT/2031257	IT/2031287	£49.60





Extra wide clamp Ref. VJS/CG/PRO8

# VARIJIG CLAMP GUIDE ACCESSORIES

A range of accessories for use with our Varijig Clamp Guides.



# **ROUTER BASE** PLATE

Plunge router base accessory.

- Base plate engages in the T-slot in the Varijig clamp guide extrusion.
- Made from clear plastic.
- Includes adjustable guide bar for perfect tracking using hex key provided.

## VJS/CG/RBP

£23.36



#### SAW BASE PLATE

Circular saw base accessory.

- Base plate engages in the T-slot in the Varijig clamp guide extrusion.
- Includes adjustable guide bar for perfect tracking using hex key provided.

**VJS/CG/SBP** £23.36



#### **END STOP BLOCK**

Adjustable end stop block.

Engages in the T-slot on the Varijig clamp guide extrusion and can be fixed in position using locking knob.

# VJS/CG/ESB

£11.06



# **SQUARING ATTACHMENT**

Allows Varijig clamp guide to be squared up for maximum

- Large 90° head allows clamp to be used as a clamping T-square.
- · Serrated front edge.
- · Includes fixing screws.

#### VJS/CG/SQA

£11.68



## HANDLE **EXTENSION**

Lever extension handle for Varijig clamp guides.

- Gives better leverage to operate the clamp, especially when more clamping pressure is required.
- · Increases lever length by 134mm.



£6.76





### **WIDE JAW KIT**

Pair of plastic jaws for fitting onto the jaws of the Varijig clamp guides.

- · Distributes clamping pressure over the workpiece to minimise clamping marks.
- Built-in mounting holes allow a batten to be fitted.
- · Includes fixing screws.

### VJS/CG/WJK

£7.99



# FEATHER BOARD

Feather board finger pressure accessory.

- Clamps to the Varijig clamp guide which can then be easily clamped to a router table top.
- Provides horizontal side pressure.
- Includes fixing kit.

## VJS/CG/FB

£11.68



# T11 VARIJIG **CLAMP GUIDE KIT**

Allows T11 Router to be connected to the Varijig clamp guides.

- Comprises alloy bracket fixing and plastic slider. Adjustment facility to make router
- nearer or further away from guide to allow wider slots and trenches to be routed.
- Alloy bracket is bolted to T11 base.

### T11/VJS/CGKIT

£46.58



# **BACK-TO-BACK CLIPS**

Allows two Varijig clamp guides to be joined back to back.

- Clips comprise of alloy brackets and knobs.
- Raises component by 32mm for unobtrusive clamping especially for full edge mould work.

#### VJS/CG/BBC

£12.31 8 pack





# **ROLLER STAND**

Adjustable roller stand for supporting materials on machines ensuring the work stays level with the table for safe cutting without the work tipping or binding.

- Ball bearing roller allows work to be easily pulled onto the bed of the machine.
- Free running action for easy movement of materials.
- Keeps both hands free to control the machinery safely.
- Prevents the work from binding or tipping as the cut is made.
- Allows longer stock to be easily handled by one person.
- Ideal for infeed and outfeed support on crosscut applications or as a take-off support for ripping and planing work.
- Increases efficiency and productivity.
- Can be used on commercial saw stands.







VIDEO



# **HEAVY DUTY GRIPPER CLAMPS**

A concise range of F-Style quickaction gripper clamps for a variety of clamping applications.







O Max. Opening	D Max. Throat Depth	S Size of Steel Section	Product Ref.	Price
200mm (8")	100mm (4")	27 x 7.5mm	FC/200	£16.03
300mm (12")	100mm (4")	27 x 7.5mm	FC/300	£18.79
500mm (20")	100mm (4")	27 x 7.5mm	FC/500	£21.57

REPLACEMENT PARTS:	Product Ref.	Price
Sliding jaw pad Round	WP-FC/SJP	£0.78
Fixed jaw pad Rectangle	WP-FC/FJP	£0.78





# LOC BLOCKS

Pack of four gripping blocks that can interlock together to allow workpiece to be held in place when sanding, drilling and finishing.

- No need to use clamps. Set-up in seconds. Grips both workpiece and bench.
- Lifts workpiece from bench, to allow complete access to every edge.
- Can be used for routing, however extra care should be taken to prevent material tilt.
- Anti-vibration, non-slip, non-marring rubber pads on both top and bottom of the blocks.

**LOC/BLK/PK1** (4 pack) £16.54

Size: 67 x 67 x 25mm (173 x 173mm when 4 blocks interlocked)



trend-uk.com/video



Interlocking



Painting Perfect for avoiding drips and sticking.



Routing with bottom clearance. Simply position blocks in corners.



# TOGGLE CLAMPS

#### **PROFESSIONAL**

Ideal for securing workpiece either onto jigs or to the surface of the machine. 'E' is the threaded spindle length.

Description	Force kg	_		_	-	_	Product Ref.	Price	
Small	75	30	105	36	19	4	H75	£16.67	
Modium	150	50	160	52	24	0	H150	220 00	

#### **CRAFTPRO & HOBBYIST**


Economy range clamp, ideal for securing workpiece either onto jigs or to the surface of the machine (150kg force).

Description	Force kg	_		_	-	_	Product Ref.	Price
Medium (1 off)	150	50	160	53	23	3	CR/H150	£15.35
Medium (pair)	150	50	160	53	23	3	CR/H150/SET	£27.13

### **PUSH-PULL CLAMP**

Ideal for securing workpiece against a back stop on a jig.

Force	E	A	B	Product	Price
kg	mm	mm	mm	Ref.	
150	23	126	11	PP150	£22.23





# SELF-ADHESIVE BACKED **NON-SLIP MAT**

Ideal for gripping and holding component while woodworking and jig making. Can be used to refurbish pushblocks or lining the drawers of workshop tool chests etc. Can be cut to size to suit application.

**NS/MAT/B** £6.97 Size: 300 x 300mm



# **NON-SLIP MAT**

Specifically formulated PVC gripping mat which holds work in place for woodworking applications without the need for clamps. Ideal for sanding and hand planing.

**NS/MAT/A** £11.92

Size: 1220 x 610mm



## DIGITAL

# LEVEL BOX

Find the angle on a surface quickly and accurately. Ideal for table and mitre

- Automatic LCD large backlight for easy reading of angle.
- Accuracy of +/-0.2° for all angles.
- Measures in relative and absolute measurements.
- Working range of angle measurement 4 x 90°.
- · Automatic digital inversion for overhead measurements.
- Auto shutdown in 5 minutes.
- · Magnetic base for hands free use.
- · Absolute level sensor.
- · Zero button to determine the angle change from initial measurement.
- Includes AAA battery.

**DLB** £21.17

Size: 59mm x 59mm x 29mm





**WITH CENTRE** 

POINT FINDER

#### INCLUDES:

1 x AAA 1.5V Alkaline battery 1 x Fabric pouch with belt loop




### SPECIFICATION:

Read out accuracy for all a	angles +/-0.2°
Resolution	0.1°
Auto shutdown time	5 minutes
Auto shutdown backlight	30 seconds
Weight	84g

#### ANGLE SENSOR TECHNOLOGY







Magnetic base



Large back light

# **POINT2POINT** MK2


Mark equally spaced multiple points, for drilling, dowelling, jointing, pinning and flat dowelling.

- Making layout tasks easier, faster and more accurate.
- Equidistant measuring gauge with centre point finder.
- 2-point locking mechanism with 7 equidistant marking positions from 85mm to 710mm.
- For left and right hand use.
- Ideal for woodworking, arts and crafts, sewing etc.

# **M/P2P01** £21.05



Simply expand the point to point mechanism, find the ideal spacings and lock the 7-point marking positions, then transfer to component.



Perfect alignment



# **COMPLETE FLAT LYING** TRAMMEL SET

Attach to rules and squares when marking/cutting arcs, circles and parallel

#### lines.

- Self supporting flat lying clip on compass.
- Unrivalled marking, mortise and panel gauge.
- · Quick and accurate to use with full stability and
- Interchangeable Carbon Steel point, pencil and scribing blade.
- Hyper fine disposable blades ensure perfect results every time.
- Fits any steel or aluminium rule from 150mm (6") upwards with blade width less than 50mm.



Ruler & combination square not included



Cut or mark circles



VIDEO

TO

WATCH

trend-uk.com/video

Deep range marking gauge.





# 200MM DIGITAL

# ANGLE FINDER

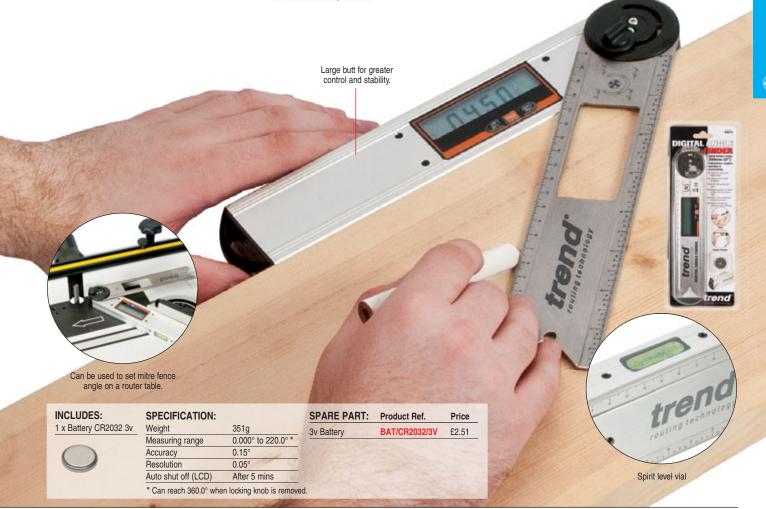
Calculates angles from 0° to 220°. Robust lightweight aluminium construction with 50mm wide folding metal blade and locking function.

- Easy operation with three buttons on/off, hold and zero/ABS.
- · Use on internal and external angles.
- Readout reads correctly when used in relative mode, and locks in ABS mode.
- 90° angle checker on end of blade.
- Lock function to prevent the last measurement being lost in ABS mode.
- Dual metric and imperial scale.
- Angles up to 360° can be reached when locking knob is removed.

**DAF/8** £40.31







# **CARPENTERS**

3 Pack of medium lead (HB) pencils.

- Suitable for general carpentry.
- · Ideal for softwoods and hardwoods.
- · Leaves a clear visible line irrespective of material or grain.

**PENCIL/CR/3** £1.78

7" length

# www.trend-uk.com




# **DIGITAL ANGLE RULES**


# Calculates angles quickly and accurately.

- Digital display for angles.
- Two sizes 7" and 18-1/2" with two stainless steel rules with metric and imperial scale.
- Measuring range from 000.0° to 360.0° with an accuracy of 0.3°.
- · Rule locking function.
- · Ideal for woodworking, construction and machining.
- Easy operation with two press buttons.
- · Auto-shut off in 6 minutes of LCD.
- Includes replaceable CR2032 3v Lithium battery.






# DAR/300 (12") £25.70



# DAR/500 (18-1/2") £33.09

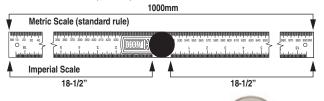

REPLACEMENT PART: Product Ref. Price 3v Battery CR2032 BAT/CR2032/3V £2.51





Angle rule Internal and external angle finder.



OPTIONAL ACCESSORY: Product Ref. Fabric Tool Holder for DAR/200 only

With belt loop, hanging loop/carry strap with quick release buckle & spare battery pocket. CASE/DAR/200 £6.62





Automatically

halves the angle.

# ANGLEFIX™ MITRE GUIDE

Halves the angle for mitre joints. Use for mitre cutting of frames, skirting, architrave and beading as well as basic marking out.

· Halves angles to achieve correct cutting angle before cutting mitres.

• Use for mitre cutting of frames, skirting (not tall skirting), architraves and beading.

• Sets internal and external angles.

• Can be used with hand mitre and snip-off saws.

#### **ANGLEFIX** £19.95 Patent No. PCT WO 00/67969



Position the tool in the unknown angle and the metal flag automatically halves the angle.



Position the long part parallel to the workpiece and set the sawblade parallel to the metal flag.



The result is a perfect fit











#### PERFECT BUTT

The world's fastest professional worktop scriber tool. It completes traditional scribing chores with precision, speed and ease.

- · Quick and easy to use by remaining stable whilst scribing directly onto work surfaces, flooring, shelves etc.
- It works by running a wheeled scribe unit along an irregular feature.
- The sprung pencil in its centre will accurately copy the profile directly onto the workpiece to be installed.
- It can then be cut and fitted to the surface resulting in a perfect butt.
- Five sizes of quick fit track wheels to cope with a variety of

# **M/PB01** £23.88 Design Reg. 3014615











After

#### INCLUDES:

- 1 x Body
- 1 x Pencil
- 1 x 18mmØ Cap wheel
- 1 x 29mmØ Wheel
- 1 x 50mmØ Wheel
- 1 x 70mmØ Wheel







trend-uk.com/vide



The Multiscribe is a profile matching tool used to transfer contours from one shape to another and marks onto various materials.

- 15 functions including parallel scribe, convex scribe, contour profile scribing and line block.
- · Multi-function tool for a variety of marking out applications.
- For use by all trades, carpenters, joiners, builders etc.
- Built in spirit level and pencil sharpener.
- Steel blade with 5mm and 1/4" graduations for profiling.

#### **MS/PRO** £38.19

Patent No. GB2380164. Design Reg. 3021163.



Compass Allows the drawing of circles with various diameters.



Profile scribe Allows the drawing of an equidistant line parallel to a chosen edge.



Marks a line at 45° to a given straight or flat surface.





#### T-SQUARE

Provides an instant means of squaring off, marking out, setting-up jigs etc.

- Made from solid laminate.
- Blade guiding edge bevelled for ease of use.
- T-square has a tapered blade.

**TSQ** £31.36 Size: Blade length 645mm.







# PROFESSIONAL DIAMOND SHARPENING STONES

Continual diamond surfaced stones for sharpening, deburring or honing a wide range of tools.



#### DOUBLE-SIDED SLIP STONES



A range of double-sided slip stones for all your sharpening needs. Suitable for router cutters, circular sawblades, turning and carving tools, chisels and all hand tools, knives, domestic and gardening.

#### 3" DOUBLE-SIDED **CREDIT CARD** STONE

More robust thicker general purpose double-sided credit card size stones. Ideal for Carbide & HSS router cutters. chisels, turning tools & general joinery tooling. Ref. DWS/CC/CX ideal for roughing gouges, HSS hollowing inserts, HSS coring inserts, scrapers & repairing damaged edges. Supplied in a wallet with grit sizes clearly etched on each surface.

	Grade	Grit	Micron
<b>•</b>	Fine	600	25
<b>•</b>	Coarse	300	50









	Grade	Grit	Micron
<b>•</b>	Coarse	300	50
<b>♦</b>	Extra coarse	180	70

**DWS/CC/CX** + £22.15 Coarse/extra coarse, size: 84 x 50 x 1.8mm

#### 3" DOUBLE-SIDED **CARVERS STONE**

A double-sided combination of two grades of fine grit designed for carvers. The more robust thickness offers precision honing for a keen edge. Supplied in a wallet. Grit sizes are clearly marked on each side.

	Grade	Grit	Micron
<b>*</b> *	Extra Fine	1000	15
<b>•</b>	Fine	600	25







**DWS/CS/FF** £23.27 Size: 84 x 50 x 1.6mm

#### 5" DOUBLE-SIDED **POCKET STONE**

A double-sided fine/coarse 5" pocket stone. Ideal for router cutters, sawblades, chisels, knives, domestic and garden tools.

	Grade	Grit	Micron
<b>•</b>	Fine	600	25
<b>•</b>	Coarse	300	50
	We/DD	E/EC .	606.00

	Grade	Grit	Micron	
•	<ul><li>Extra Fine</li></ul>	1000	15	
•	<ul> <li>Extra Coarse</li> </ul>	180	70	

**DWS/PP5/FX** + £28.33





iraue	Grit	Micron
Fine	600	25
oarse	300	50

**DWS/P5/FC** + £28.40 Size: 127 x 27 x 1.5mm, supplied with a fabric tool holder and cleaning block.



Size: 127 x 27 x 1.5mm, supplied in





Shatters easily, wears quickly, usually glued (impregnated) onto the base.

#### **TYPES OF DIAMOND**

Trend: Monocrystalline Diamond is a single structure which does not break with use. It has an exceptional lifespan. Diamond is set in nickel and then electroplated onto the precision ground surface

Some other Brands: Polycrystalline diamond is a fragmented compound that breaks and wears away quickly. Usually these are impregnated (glued) into

A continual diamond surface prevents "snagging" in holes when sharpening smaller tooling as well as giving 50% more diamond per square inch.

#### **PRECISION BENCH** STONES & KITS

PRECISION FLAT

A range of precision double-sided bench stones. Substrate precision pre-ground flatness. Coarse grade suitable for flattening, re-honing, HSS, re-shaping and general joinery. Fine grade gives a razor edge in seconds, suitable for carving tools, cabinetmaking, all carbide tooling and all

finishing work. Use Trend lapping fluid to prevent rusting and clogging.

#### 6" X 2" DOUBLE-SIDED WORKSHOP **BENCH STONE**

Ideal size for all Turners and Woodcarvers. Fine finish achieves a razor edge suitable for all carving tools, including woodturning inserts & carbide tips. Grit sizes clearly marked on each surface. Use with lapping fluid to prevent rusting, clogging and assists in keeping tooling clean. Supplied with non-slip mat, cleaning block & wallet.

	Grade	Grit	Micron
<b>**</b>	Extra Fine	1000	15
•	Coarse	300	50

**DIAMOND WHETSTONE** 

and leather strop gives a highly polished finish.

1000

**HONING & POLISHING KIT** 

8" x 3" wide classic professional double-sided diamond stone. Ideal for chisels, plane blades and all hand tools. Honing guide

ensures correct angles are maintained. Honing compound bar

Micron

8" x 3" bench stone in pouch

Honing compound bar & strop

Honing guide set

Lapping fluid

Cleaning block

Non-slip mat

**DWS/W6/FC** £47.15

Size: 152 x 50 x 8mm

Grade

Extra Fine

Coarse

INCLUDES:

DWS/CP8/FC

DWS/HG/SET

DWS/LF/100

DWS/HP/KIT

DVD/DWS/SME DVD BOOK/DWS

DWS/CB/A DWS/NM/W8

**DWS/KIT/B** £133.68





#### **CLASSIC PROFESSIONAL** DIAMOND 8" X 3" **WORKSHOP DOUBLE-SIDED** STONE


1000 grit fine surface has continual diamond surface for smooth precise honing for all carving & cabinet making tools.

300 grit coarse surface has unique clearance channels which assist in the dispersion of lubricants & residue from the tool & increases the speed of cut. Suitable for re-shaping, general joinery & heavy duty work. Ideal for carbide tooling, woodturning inserts & carbide tips. Supplied with fabric tool holder, cleaning block and non-slip mat.

	Grade	Grit	Micron	
<b>++</b>	Extra Fine	1000	15	_
<b>+</b>	Coarse	300	50	_

#### **DWS/CP8/FC** £90.13

Size: 203 x 75 x 8mm










#### CLASSIC PROFESSIONAL **DIAMOND 8" X 3" DOUBLE-SIDED FLATTENING STONE**

Double-sided flattening plate with precision ground substrate. Flatten water and oil stones to precision flatness. Fix and restore a damaged edge on chisels. Includes clearance channels to disperse residue faster. 180 grit extra coarse for fast and clean stock removal. Complete with fabric tool holder, non-slip mat and cleaning block.

Grade	Grit	Micron
Fine	600	25
<ul> <li>Extra Coars</li> </ul>	e 180	70

#### **DWS/CP8/FX** £92.83

Size: 203 x 75 x 8mm





#### COMPLETE DIAMOND SHARPENER KIT

Comprises of two 8" x 3" wide classic professional double-sided diamond stone covering 4 different grits. Lapping fluid, Sharpening Made Easy DVD and diamond sharpening booklet.

	Grade	Grit	Micron
<b>*</b> *	Extra Fine	600	25
<b>•</b>	Coarse	300	50
<b>•</b>	Fine	600	25
<b>♦</b>	Extra Coarse	180	70
_			

#### **DWS/KIT/E** £206.88

INCLUDES: DWS/CP8/FC DWS/CP8/FX DWS/NM/W8 DWS/LF/100 DWS/HP/LS/A DWS/HP/100 BOOK/DWS DWS/CB/A

8" x 3" bench stone 8" x 3" bench stone Non-slip mat x 2 Lapping fluid Leather strop Honing compound bar Booklet

Cleaning block



#### DIAMOND SHARPENER KIT

Grade

Comprises the 3" mini half round/flat taper file. double-sided credit card stone, lapping fluid, Sharpening Made Easy DVD and diamond sharpening booklet.

Micron

<b>**</b>	Extra Fine	600	25
•	Coarse	300	50
DV	VS/KI1	<b>T/C</b> £50	).86
DWS DWS DVD/ BOO	UDES: C/CC/FC C/TF3M/F C/LF/100 C/DWS/SME K/DWS C/CB/A	Credit card 3" Mini tap Lapping flu DVD Booklet Cleaning block	er file
		-	4



# DIAMOND FILES & STEELS

For use on carving, turning and shaped tools, metals, plastics, wood and Carbide Tipped tools. For domestic, garden and kitchen applications.



trend-uk.com/vide

#### **DIAMOND TAPER FILES**

Unique versatile half round/flat tapered file suitable for woodworking, gardening and domestic tooling. Ideal for woodturning tools. Monocrystalline diamond allows fast, clean stock removal. Precision made with flat top and convex back blade.






















#### 6" DIAMOND TAPER FILE

Exceptionally versatile multi-purpose sharpening tool. Overall length 270mm with 150mm diamond coverage. Thickness 1.8mm to 4.3mm.

	Grade	Grit	Micron
•	Fine	600	25



**DWS/TF6/F** £29.25



#### 3" DIAMOND TAPER FILE

Designed for woodturning and carving tools. Sharpens Carbide Tipped tooling in seconds. Overall length 180mm with 75mm diamond coverage. Thickness 1.5mm to 2.5mm.

	Grade	Grit	Micron
<b>•</b>	Fine	400	35



**DWS/TF3/F** £26.87

#### 3" DIAMOND MINI TAPER FILE

Suitable for sharpening forstner bits, rotary carving, woodturning and carving tools as well as Carbide Tips. Unique size allows access to all difficult sharpening problems. Overall length 150mm with 75mm diamond coverage. Thickness 1.8mm to 3mm.

	Grade	Grit	Micron	
<b>♦</b>	Fine	600	25	



#### **DWS/TF3M/F** £23.27

#### |<del>|</del> |m -<del>|</del>

# DIAMOND MACHINIST DOUBLE-SIDED FLAT FILE

Widely used by professional Woodturners worldwide. A durable unique doubledsided fine/coarse diamond file with polycarbonate handle. Sharpens Carbide inserts, scrapers, skews and gouges. Used in engineering, woodworking, carving and for domestic use.









	Grade	Grit	Micron	
•	Fine	600	25	
•	Coarse	300	50	

#### **DWS/MF/FC** + £26.09

Size: 178mm overall length, diamond width 20mm on 22mm wide base Thickness 6.35mm to 10mm.



#### NEEDLE FILE SET

Complete set of four needle files incorporating a variation of shapes and profiles for sharpening all awkward tooling including hand saws. Used to file and shape glass, ceramics, metal, carbide and wood. As used in the British aerospace industry. End diagrams below are shown actual size.



Half round/taper/flat
Triangular/taper

Round/taper

	Grade	Grit	Micron	
_	Eino	600	25	

#### **DWS/NFPK/F** £26.87 Size: 160mm overall length with 75mm

Size: 160mm overall length with 75mm diamond length.





#### 10" DIAMOND STEEL

Sharpens all blunt knives easily in seconds with little pressure. Ideal for domestic, butchery, catering and fishing with an exceptional life span. Stainless steel core electroplated with diamond surface and polycarbonate handle. Thickness 10mm to 6.35mm.

	Grade	Grit	Micron
<b>•</b>	Fine	600	25

**DWS/DS10/F** + £31.87 Size: 10" (254mm)







#### <u>~</u>

#### DIAMOND PEN FILE ROUND/TAPER

Multi-purpose versatile pen file with round/taper profile. Suitable for use on turning and carving tools, shaped tools and profiles. Also for woodworking, gardening and home use. Unscrew from body which then becomes a handle.

	Grade	Grit	Micron
•	Fine	600	25

**DWS/PFR/F** + £22.59 Size: 143 x 11.3mm, file length 93mm x 5.5mm to 4mm diameter.










Ref: DWS/PFR/F




#### **DIAMOND ACCESSORIES**

# DIAMOND STONE HONING GUIDE

Side clamping the tool in the guide ensures that it is set square to the sharpening surface. Ensure correct angle is maintained on bevel edge chisels and plane irons when used with diamond whetstone.







#### SPECIFICATION:

Chisei biade width min.	10111111 (3/6)
Chisel blade width max.	32mm (1-1/4")
Chisel blade thickness max.	7mm
Chisel blade length min.	75mm at 25°
Plane blade width max.	60.3mm (2-3/8")
Angle	25°, 30°, 35° & 40°

Cleaning Block **DWS/CB/A** £1.97

For all stones





#### **LAPPING FLUID**

To be used on all types of diamond abrasives. The fluid improves the diamond cutting action and prevents rusting or clogging.

Designed in the engineering industry more than 30 years ago. It is a synthetic product which is water soluble.

Use with Trend DWS Professional Stones to guarantee a 5 year warranty.

**DWS/LF/100** £8.95

**DWS/LF/250** £18.50 250ml

**DWS/LF/500** £26.87





# DIAMOND HONING COMPOUND BAR & STROP


Kit for applying a polished finish to chisels and plane irons. Used to give a highly polished finish to a sharpened cutting edge.


Includes 100g honing compound bar and leather strop.

**DWS/HP/KIT** £16.75

SPARES DWS/HP/100 £11.62 100g honing compound bar

**DWS/HP/LS** £7.10 Leather strop (black) 175mm x 95mm





#### **MIRROR PASTE**

A micro ultra fine abrasive compound for a mirror finish on blades when used with a leather strop. Refines, hones and polishes carving tools, chisels, knives and planes.

Mirror finish on cutting edge to give a clean cut. Apply paste to strop, rub to absorb and then stroke edge until polished finish. Supplied in screw top jar.

**Product Reference** 

**DWS/MP/40** £10.56

30g, 2-3 micron, 8000 - 10000 grit

**ACCESSORY** 

**DWS/HP/LS/A** £8.97

Leather strop (tan) 203mm x 75mm








# FASTTRACK MK2

Fixed angle honing technology. Portable hand operated honing system giving guaranteed razor fine edges every time.



Removeable Centring Clip positions narrow blades and chisels centrally to maximise the sharpening stroke for increased efficiency.

· Ergonomic Carriage Caps for increased comfort over longer periods of sharpening with Non-slip nitrile rubber feet to help keep the Fast Track securely in place on any surface.

· Safe, quick and easy to use with no set-up time required.

Unique lateral sharpening action gives superb finished edge which is more durable & less prone to fracturing.

· Built to last, machined in solid aluminium and anodised.

Quick change magnetic stone holders keeps each stone securely in place for safe, easy operation.

• Carriage runs on nylon 66 slip rails for a smooth action.

Learn how to create micro secondary honing angles for an ultimate fine edge - prolongs tool life.

Optional accessory Diamond Cross stones available.

· Can be used with lapping fluid.

· Includes cleaning block and bench fixing facility.

#### **FTS/KIT/MK2** £74.95

Stone size. 75 x 24mm Patent No. GB2364943

> **DIAMOND CROSS RELIEF PATTERN Gives a more** aggressive abrasive profile and reduces clogging.










Sharpened at 25° with a razor sharp 30° micro secondary angle.



Hones square edged chisels and plane blades from 1/8" (3mm) to 2-1/2" (64mm).



Quick change sharpening angle 25°, 27.5°, 30° and 32.5°



VIDEO

TO

WATCH

trend-uk.com/video

Unique safety feature blade remains stable when sharpening.



1 x Base and handle

1 x Preparation stone 220 grit

1 x Finishing stone 450 gri



#### CHISEL EDGE GUARDS

Chisel covers to protect from injury and damage.

Two pieces of each size.

1/4" (6.35mm) 1/2" (12.7mm)

3/4" (19mm) (25.4mm)

1-1/4" (31.8mm) 1-1/2" (38mm) FTS/CEG £7.94





SPA	RES:
SPA	neo.

Product Ref. Price

Preparation stone 220 grit Black - 60 micron (extra coarse) FTS/S/P £14.44

Finish stone 450 grit £14.44



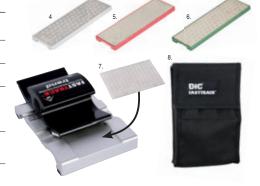
OPTIONAL ACCESSORIES: Product Ref. Price

4. Roughing stone 100 grit Grey - 20 micron (ex-coarse) £14.44 Fine finish stone 600 grit

Red - 25 micron FTS/S/FI £14.44 Super fine finish stone 1000 grit Green - 9 micron £14.44

Deburr plate super fine finish 1000 grit Size 64 x 47 x 0.6mm. Ideal for quick removal of burrs from chisel & plane irons. Self adhesive backed. Can retrofit to existing Fasttracks. FTS/DP/SFF £11.92

Storage case for FTS/KIT Fabric storage case with pockets to accept three stones. FTS/CASE £9.66



# SHARPENING

# **FASTTRACK MK2 BUNDLE**

With all of the features of the FTS/MK2 but with additional accessories

- Includes tough fabric storage case with pockets to accept three stones.
- Deburr plate, super fine finish 1000 grit. Ideal for guick removal of burrs from chisel & plane irons. Self adhesive backed.
- Tapered stones in a range of 5 grits for intermediate angles. 22.5°/27.5° when used on primary angle and 27.5/32.5° on secondary angle.
- · A self-adhesive backed leather strop for use with a honing paste to give mirror finish on chisels and plane blades. Size: 105mm x 75mm.
- Non-slip mat to help keep the Fast Track securely in place on any surface.

#### **FTS/KIT/MK2B** £99.95

Stone size, 75 x 24mm Patent No. GB2364943



- A self-adhesive backed leather strop accessory for the FastTrack sharpener.
- Retro fit to underside FastTrack base.
- For use with a honing paste to give mirror finish on chisels and plane blades.
- Size: 105mm x 75mm.



#### **INCLUDES:**

- 1 x Base and handle
- 1 x Angled Roughing stone 100 grit
- 1 x Angled Preparation stone 220 grit
- 1 x Angled Finishing stone 450 grit
- 1 x Angled Fine Finishing stone 600 grit
- 1 x Angled Super Fine Finishing stone 1000 grit
- 1 x Centring clip
- 1 x Non slip mat
- 1 x Leather strop
- 1 x Fitted De-burr Plate
- 1 x Tough Canvas Storage Case
- 1 x Cleaning block

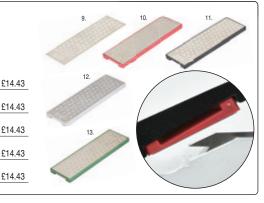
#### TAPER STONES

- · Tapered stone for intermediate angles.
- 22.5°/27.5° when used on primary angle and 27.5/32.5° on secondary angle.

9.	riiiisiiiiig	Taper Storie 450	grit
	White - 35	micron	FTS/TS/F

10. Fine Finishing Taper stone	e 600 grit	
Red - 25 micron	FTS/TS/FF	£14.43

- 11. Preparation Taper stone 220 grit Black - 60 micron 12. Roughing Taper stone 100 grit
- Grey 20 micron 13. Super Fine Taper stone 1000 grit
- £14.43



B4C FASTTRACE

#### FASTTRACK KNIFE SHARPENER

Portable easy to use hand held knife sharpener giving razor fine edges every time.

- Simple and safe to use, can be used by total beginner to the most discerning of professionals.
- Interchangeable grade of diamond with on board leather strop.
- In freehand use the sharpener adapts the same sharpening action as a chefs steel, or it can be used on a flat surface, eg chopping board.
- Twin magnetic guides hold the blade at the correct sharpenning angle and can sharpen both single and double bevelled blades with an included angle of 30 degree.
- Stone will remove small nicks and damage. Work through a range of accessory stones to gain the finest of edges.
- · Large sharpening surface contact area enables blade prepreparation, allowing for quick re-honing which extends the life of the edge and the knife.
- Includes 220 grit stone, optional accessory Diamond Cross stones available. (see page 220)
- Tough GFN plastic construction with Nitrile feet to grip the work

**FTS/KS** £31.78





DIAMOND CROSS

# SHARPENING TOOLS FOR THE TRADE

Diamond Cross Technology provides the perfect balance between diamond and recess, maximising abrasion rates and clearance of debris.

- Trade Range of diamond sharpeners with unique Diamond Cross embossed markings and Stainless Steel plate.
- Monocrystalline diamond for fast clean stock removal.
- . Unique diamond cut embossed on stones to reduce clogging.
- Smallest stones have a unique grip handle for safer more comfortable use.
- Grit indicator on stones to easily identify correct side.
- . Use Trend lapping fluid to prevent rusting and clogging.



WARRANT

#### DIAMOND CROSS Unique diamond cross embossed

on stones to reduce clogging.

3" DOUBLE-SIDED

# **ROUTER CUTTER**

- A double-sided fine/coarse 3" stone with unique gripping handle.
- Specifically designed for router cutter sharpening.









Grit

600

Coarse

Micron

50

#### 3" DOUBLE-SIDED

#### CREDIT CARD STONE

- A double-sided fine/coarse credit card size stone with unique gripping handle.
- · Ideal for shaped router cutters, chisels, woodturning and carving tools.



Size: 75 x 50 x 1.6mm (excluding handle)



	Grade	Grit	Micron
•	Fine	600	25
•	Coarse	300	50








#### 8" X 2-3/4" DOUBLE-SIDED

#### **WORKSHOP** STONE

- · For carving and cabinet making.
- · Use to sharpen chisels and plane irons.
- Precision ground Tool Steel core with Stainless Steel plates.
- Supplied in fabric case, with pair of magnetic bench holders and cleaning block.



	Grade	Grit	Micron
<b>++</b>	Fine	1000	15
•	Coarse	300	50

#### **DC/W8/FC** £57.35

Size: 203 x 70 x 7mm





#### BENCH HOLDER (PAIR) Available separately. Magnetic with non-slip Nitrile rubber feet. Interlocking design allows use with various

sizes of standard bench and credit card stones as well as Diamond Cross credit card and router cutter stones. Raises stone 12mm above work surface.







#### 5" DOUBLE-SIDED

#### SINGLE HANDLE FILE

- A double-sided fine/coarse file with single unique gripping handle.
- Ideal for sharpening sawblades, knives and chisels.

DC/F5/F	C £14.29
Size: 125 x 25 x 1.5mm	(excluding handle)

•	Fine	600	25
<b>*</b>	Coarse	300	50

600

Grit

300

Micron

Coarse

Grade

Coarse

Extra coarse



#### 4" DOUBLE-SIDED

# TWIN HANDLE FILE

- Double-sided fine/coarse files with two gripping handles for better control.
- Ref. DC/F4T/CX is ideal for sharpening larger bladed gardening tools with its coarse/ex-coarse grade. Grade Micron

#### **DC/F4T/FC** £14.29

(Fine/coarse)

Size: 100 x 25 x 1.6mm (excluding handle)

#### **DC/F4T/CX** £14.29

(Coarse/ex-coarse) Size: 100 x 25 x 1.6mm (excluding handle)







Micron

# **CRAFTPRO** DIAMOND SHARPENING

- For sharpening, deburring or honing a wide range of tools.
- . Monocrystalline diamond for fast clean stock removal.
- Double-sided for coarse sharpening and fine honing.
- Fast, easy to use, durable and versatile.
- The use of Trend Lapping Fluid is recommended.
- Fine grade used for cabinet making and carving tools.
- Fine finish refines the cutting edge of all hand tools, spindle knives, chisels and plane irons.
- Coarse grade for carpentry and joinery, rapidly fixes or restores damaged or blunt tools.
- Achieves a razor sharp edge in seconds.

# 4" DOUBLE-SIDED

#### STONE WITH **FOLDING HANDLE**

- Folding ABS plastic handle to protect diamond surface.
- For sawblades, chisels and knives.
- · Oval hole design to collect and hold metal filings.
- Use with lapping fluid.

#### CR/DWS/F4/FC £18.32

Size: 89 x 20 x 6mm





Grit

600

Grade

Fine

Coarse

Micron

40

#### 3" DOUBLE-SIDED **CREDIT CARD** STONE

- A double-sided fine/coarse credit card size stone.
- Ideal for fluted, small and shaped router bits, woodturning and carving tools.

#### CR/DWS/CC/FC £12.17

Size: 82 x 50 x 0.8mm







Grit

600

#### 6" X 2-3/8" DOUBLE-SIDED **BENCH STONE**

- For plane irons and chisels.
- Plastic base with non-slip feet and cover.
- Fine side has oval hole design to collect and hold metal filings with clear diamond area for small tools.
- · Solid diamond on coarse side.
- · Supplied in plastic case.

#### **CR/DWS/B6/FC** £36.76

Size: 152 x 61 x 6mm





Grade

Fine

Coarse



Micron

25

600

360





#### LAPPING FLUID See page 219 for full details

Grade

Fine

Product Ref. **DWS/LF/100 DWS/LF/250 DWS/LF/500** 



**FASTTRACK** SYSTEM

See page 220 for full details.

Product Ref. FTS/KIT



- Ensures that the correct angle is maintained on bevel edge chisels and plane irons.
- Roller with alloy body which clamps chisels and plane irons in place.
- Marked guides for 25° and 35° angles.
- · Adjustable stop for setting blade angle.
- Not suitable for use with firmer chisels or short blade (Butt) chisels.

**CR/DWS/HG** £9.95



SPECIFICATION.	
Chisel blade width min. / max.	6.35mm / 32mm
Plane blade width min. / max.	35mm / 65mm
A I	050 0 000



# LED TORCHES

A range of alloy bodied high quality LED torches suitable for all trades.

High grade aluminium body with deep-seated anodizing processing for increased abrasion resistance.

The range consists of two head torches, a pen torch, a pocket torch and a angle twist torch.



#### ANGLE HEAD TORCH


- Innovative, lightweight and comfortable design with quick dismount.
- One button control: High-Low. Long press (2 secs): Strobe-SOS.
- · Cree LED, 50000 hours lifetime.
- · Quick change light mode.
- · IPX4 resistant, impact resistant PC lens.
- · Aircraft aluminium body with anodizing finish.
- · High efficiency PCB, for safety and reliability.
- · Strong magnet & pocket clip for hands free work.
- Size: (L) 72 x (D) 32mm.
- · Weight: 76g excluding battery.
- 1 x AA (1.5v) battery included.







#### TCH/HA/H10 £21.17























#### PIVOT HEAD TORCH


- Innovative, lightweight and comfortable design with pivoting head.
- One button control: Low-Middle-High. Long press (2 secs): Max-Strobe-SOS.
- Cree LED, 50000 hours lifetime.
- · Water resistant 2M, impact resistant PC lens.
- · Aircraft aluminium body with anodizing finish.
- High efficiency PCB, for safety and reliability.
- Size: (L) 64 x (D) 44 x (W) 45mm.
- · Weight: 103g excluding battery.
- 3 x AAA (1.5v) batteries included.


#### **TCH/HP/H20** + £21.17





































ANGLE TWIST **TORCH** 

- One button control: Low-High. Long press (2 secs): UV light.
- · Rechargeable with micro USB port.
- Innovative angle twist head design.
- Cree LED, 50000 hours lifetime.
- IPX4 resistant, impact resistant PC lens.
- · Strong magnet in base and pocket clip.
- · Aircraft aluminium body with anodised finish.
- Size: (L) 160 x (D) 30/26.8mm.
- · Weight: 158g excluding battery.
- Storage pouch and USB cable included.
- 1 x 18650 Li-lon (2600 mAh) battery included.

#### TCH/AT/B75R £37.08


















LUMENS















Storage

Pouch



One Button Control

trend

High Grade

Aluminium Body







- Innovative and lightweight design.
- · Easy focus sunlight.
- · Lumileds CRI 90 LED, 50000 hours lifetime.
- IPX4 resistant, impact resistant PC lens.
- · Aircraft aluminium body with anodised finish.
- Size: (L) 135 x (D) 17/14mm.
- · Weight 36g excluding battery.
- 2 x AAA (1.5v) batteries included.

#### TCH/PE/B22 £15.86


























#### **EASY FOCUS POCKET TORCH**


- Innovative and lightweight design with easy focus.
- Rechargeable with micro USB port.
- One button control: High-Low, Strobe.
- Cree LED, 50000 hours lifetime.
- Tail cap button, with guick-change light mode and charging indicator light.
- · IPX4 resistant, impact resistant PC lens.
- · Aircraft aluminium body with anodised finish.
- Size: (L) 84 x (D) 28/23mm.
- · Weight: 71g including built-in battery.
- Wrist strap and USB cable included.
- 1 x 17735 Li-Ion (650 mAh) battery included.

#### One Micro USB Button Rechargeable Control White Light Cree LED Wrist Strap trend Easy Focus Spotlight

High Grade Aluminium Body

#### TCH/PO/G12R £21.17





















Easy Focus



# PRO STORAGE SYSTEM







**Certified Water** & Dust Resistant



**Maximum Impact** Resistance



**Durable Polyamide** Latches/Connectors



Max. Weight Per Box



Modular & Stackable

The Pro Storage System gives versatility & convenience for the challenging site environment.



# WHAT DOES IP66 DUST & WATER RESISTANT MEAN?

Max

#### (INTRUSION PROTECTION)

Totally dust tight. Full protection against dust and other particulates, including a vacuum seal,



Partial protection against dust that may harm equipment.

tested against continuous airflow.

Protection against solid objects larger than 1mm (wires, nails, screws, larger insects and other potentially invasive small objects such as tools/small etc).

Protection from entry by tools, wires etc, with a diameter of 2.5mm or more.

Protection against fingers or other object not greater than 80mm in length and 12mm in diameter (accidental finger contact).

Protection from a large part of the body such as a hand (not deliberate access); from solid objects greater than 50mm in diameter.

(MOISTURE PROTECTION)

Protection against direct high pressure jets.

Protection against low-pressure jets (6.3mm) of directed water from any angle (limited ingress permitted with no harmful effects).

Protected against water splashes from all directions. Tested for a minimum of 10 minutes with an oscillating spray (limited ingress permitted with no harmful effects).

Protected against spray up to 60° from vertical.

Protection against water droplets deflected up to 15° from vertical.

Protection against vertically falling droplets, such as condensation. Ensuring that no damage or interrupted functioning of components will be incurred when an item is upright.











# ORAGE

High strength, rugged, capacious and manoeuvrable storage system with IP66 certified dust and watertight seals and high impact resistant lids and latches





#### *2 PIECE CART SET*

#### 64L Capacity. Includes Toolbox & Cart Base.

- Extendable handle with locking function can be easily adjusted to suit height requirements.
- · IP66 certified dust and waterproof seals for complete protection of valuable equipment.
- · Perfect for transporting and keeping specialised tools and equipment safe and secure.
- · Designed to fit easily through standard domestic doorways for easy manoeuvrability.
- Interlocking side clips for secure transportation.
- Each box is constructed from robust polypropylene for durable long life performance with external strengthening ribs for optimal internal storage space.



600 x 467 x 765mm



MS/P/SET2C £119.95









**DUST & WATER SEAL** 

STACK SYSTEM

#### 3 PIECE CART SET

#### 103L Capacity. Includes Organiser, Toolbox & Cart Base.

- Extendable handle with locking function can be easily adjusted to suit height requirements.
- · IP66 certified dust and waterproof seals for complete protection of valuable equipment.
- Robust Cart Base Wheels for easy movement across different terrain Cart holds up to 35kg of tools.
- · Perfect for transporting and keeping specialised tools and equipment safe and secure.
- · Designed to fit easily through standard domestic doorways for easy manoeuvrability.
- · Interlocking side clips for secure transportation.
- Each box is constructed from robust polypropylene for durable long life performance with external strengthening ribs for optimal internal storage space.



600 x 467 x 915mm



**MS/P/SET3C** £199.95







**SAWING SLOT** 

ADJUSTABLE HANDLE

#### 4 PIECE PLATFORM SET

#### 105L Capacity. Includes Organiser, 2 x Toolbox & Platform Base.

- Perfect for transporting and keeping specialised tools and equipment safe and secure.
- · IP66 certified dust and waterproof seals for complete protection of valuable equipment
- · Designed to fit easily through standard domestic doorways for easy manoeuvrability.
- · Interlocking side clips for secure transportation of compact storage boxes, totes and organisers.
- Platform Base with Locking swivel castors: 595mm x 395mm x 175mm.
- · Each box is constructed from robust polypropylene for durable long life performance with external strengthening ribs for optimal internal storage space.



745 x 510 x 1020mm



**MS/P/SET4P** £219.95









**CLAMPING SLOT** 







**Maximum Impact** Resistance



**Durable Polyamide** Latches/Connectors





Modular & Stackable

#### AVAILABLE INDIVIDUALLY





Case 200 with Organisers 585 x 385 x 190mm\* - 15 litres



Case 350 with Rails 585 x 385 x 320mm\* - 38 litres



Case 450 Plain 585 x 385 x 420mm\* - 52 litres



**Toolbox 600** 545 x 270 x 246mm\* - 22 litres



**Tote 200 with Dividers** 576 x 359 x 237mm\* - 35 litres



Wheeled Toolbox 793 x 385 x 322mm\* - 50 litres




**Platform** 745 x 510 x 180mm



· Swivel front wheels with

**Cart** 600 x 467 x 765mm\* - 50 litres · Adjustable aluminium handle for transportation

and moving around the jobsite. · Lift out tool divider for easy access and storage.





**MS/P/PLAT** £59.95 **MS/P/CART** £99.95



**Pro Organiser M** 263 x 363 x 77mm\* - 2.5 litres

· 6 individual lift out storage bins.

**MS/P/ORG/M** £16.95



Pro Organiser L 531 x 375 x 77mm\* - 6 litres

• 12 individual lift out storage bins.

**MS/P/ORG/L** £24.95



Pro Organiser XL 582 x 387 x 131mm\* - 13.5 litres

· 4 large and 8 medium lift out storage bins.

MS/P/ORG/XL £33.95



& Boxes Boxes are compatible

with MS/P/ORG/ XL. MS/C/100B9 & MS/C/100T

MS/P/RACK/4 £4.99 Rack & 4 Boxes

MS/P/RACK/8 £7.99

Rack & 8 Boxes




railed box (1 off)

**Pro Storage Tray** 

Product Ref. Price WP-MT/01A





# COMPACT STORAGE SYSTEM


Interchangeable storage boxes for tools and accessories.

Stackable with lock-together side clip connectors for easy transportation

#### **3 PIECE CART SET**

78L Capacity. Includes Organiser, Toolbox & Cart Base.

- Extendable handle with locking function can be easily adjusted to suit height requirements.
- · Robust Cart Base Wheels for easy movement across different terrain Cart holds up to 35kg of tools.
- · Perfect for transporting and keeping specialised tools and equipment safe and secure.
- · Designed to fit easily through standard domestic doorways for easy manoeuvrability.
- · Interlocking side clips for secure transportation.
- Each box is constructed from robust polypropylene for durable long life performance with external strengthening ribs for optimal internal storage space.



78 litres

MS/C/SET3C £129.95









EASY TRANSPORT

**SOLID METAL AXLE** 

#### 4 PIECE CART SET

104L Capacity. Includes Organiser, Toolbox, Tote & Cart Base.

- · Extendable handle with locking function can be easily adjusted to suit height requirements.
- · Robust Cart Base Wheels for easy movement across different terrain Cart holds up to 35kg of tools.
- Perfect for transporting and keeping specialised tools and equipment safe and secure.
- Designed to fit easily through standard domestic doorways for easy manoeuvrability.
- · Interlocking side clips for secure transportation.
- Each box is constructed from robust polypropylene for durable long life performance with external strengthening ribs for optimal internal storage space.



MS/C/SET4C £149.95





STACK SYSTEM

**DURABLE LATCHES** 

#### 4 PIECE PLATFORM SET

66L Capacity. Includes Organiser, Toolbox, Tote & Platform Base.

- · Perfect for transporting and keeping specialised tools and equipment safe and secure.
- Designed to fit easily through standard domestic doorways for easy manoeuvrability.
- Interlocking side clips for secure transportation of compact storage boxes, totes and organisers.
- · Platform Base with Locking swivel castors: 595mm x 395mm x 175mm.
- Each box is constructed from robust polypropylene for durable long life performance with external strengthening ribs for optimal internal storage space.



66 litres

MS/C/SET4P £119.95



All prices are exclusive of VAT





**ORGANISER LID** 



**LOCKABLE WHEELS** 





Modular & Stackable

**Transportable** & Manoeuvrable





100 Strong KG Platform



**Durable Polyamide** Latches

#### AVAILABLE INDIVIDUALLY





Organiser 100 With Dividers 530 x 310 x 130mm\* - 14.3 litres



**Tote 100** 530 x 295 x 130mm\* - 14.3 litres



MS/C/100T £14.95 **Tote 200** 

#### **Tote 100 With Dividers**



**Toolbox 200** 530 x 310 x 225\* - 26 litres



MS/C/200/ORG £44.95

With 2 Organiser Minis





530 x 295 x 195mm\* - 26 litres



MS/C/200T/ORG £64.95

With 6 Organiser Minis

#### Cart

530 x 380 x 690mm\* - 38 litres

- Lift out tool divider for easy access and storage for screwdrivers, chisels and other tools.
- · Cart holds up to 35kg of tools.











with six adjustable

MS/C/ORG £8.95





#### **20" OPEN TOTE** TOOL BAG

Perfect for loading and carrying tools from the van to and around the job site with easy open access.

- Shoulder strap and full length padded tubular steel handle for comfortable carrying options.
- Interior loops and pockets for storage of smaller tools for easier access.
- Top hook and loop straps for long tools such as spirit levels.
- Thick plastic base shell keeps moisture at bay when placed on wet ground.
- · Interior zipped pocket for secure storage of phone or wallet.
- Exterior zipped pocket for handsaws.
- External loop for storing insulation tape plus clip for tape measure.
- External pockets for fast access to regularly used tools and accessories.



**TB/OT20** £39.95

Size: 390 x 270 x 370mm

WHEELED BACK PACK TOOL BAG

Multifunction tool bag in a backpack design with top handle, shoulder straps or telescopic handle and wheels for multiple transportation options.

- · Three carrying options for easy transportation to and from the workplace.
- · Ideal for use on public transport or areas where a van or car access isn't practical.
- Multiple storage options to allow a full kit of tools and accessories to be carried with easy access to commonly used items.
- Deep interior main compartment for bigger tools plus lift out multi-pocket pouch for fast access to screwdrivers and other smaller tools.
- Heavy duty zips and hook and loop flaps keep the main compartments and exterior pockets securely fastened.
- Interior padded compartment for full sized laptop plus a useful key holder storage clasp external loops and D rings for additional storage options with lanyards or bungee cords.
- Max weight 25kg.

**TB/WBP** £59.95

Size: 400 x 240 x 545mm.





**TECHNICIANS** TOOL BAG

Portable multi-function storage solution for carrying testing equipment, electronics, tools and more

 Thick plastic hard base shell keeps moisture at bay when placed on wet ground.

- Two carrying options for easy transportation to and from the workplace
- · Interior security pocket for wallet or phone plus a key holder storage clasp
- · Multiple storage options to allow a full kit of tools and accessories to be carried with easy access to commonly used items.
- Deep interior main compartment for bigger tools or testing equipment.





**TB/TTB** £44.95

Size: 400 x 240 x 545mm.

BACK PACK TOOL BAG

Multiple storage pockets, pouches and zippered compartments to transport a full kit of tools to and from the jobsite.

- · Two carrying options for easy transportation to and from the workplace.
- · Thick plastic base shell keeps moisture at bay when placed on wet ground.
- · Deep interior main compartment for bigger tools.
- Multiple storage options to allow a full kit of tools and accessories to be carried with easy access to commonly used items.
- · Heavy duty zips and hook and loop flaps keep the main compartments and exterior pockets securely fastened.
- · Interior security pocket for wallet, phone or tablet and key holder storage clasp external loops and D rings for additional storage options with lanyards or bungee cords.
- · Ideal for use on public transport or areas where a van or car access isn't practical.



Size: 390 x 225 x 480mm.





# **LUBRICANTS & CUTTER CLEANING**

#### **TRENDICOTE**

Dry Lubricant PTFE Spray.

- · Dry lubricant spray to increase sawblade and router
- Invaluable for preventing build-up of resins on metal table surfaces, sawblades and metal tooling.
- Does not contain silicone.

**TRENDICOTE**\* (500ml) £20.25

#### RUST BUSTER

Rust Protector and Lubricant Spray.

- · Protects cutting tools against rust.
- · Cleans thoroughly to penetrate and loosen rusted components.
- · Penetrates and lubricates to stop squeaking.
- Drives out water on metal surfaces.
- · Frees sticky mechanisms, un-jams and lubricates.
- · Ideal for spraying onto router cutter shanks and sawblades

**RUST/60\* +** (60ml) £3.08



#### **COLLET BRUSH KIT**

- · Use to remove deposits of resin, dust and corrosion from the inside of collets.
- Made from brass to prevent score damage.
- Sizes 1/4", 8mm, 3/8" and 1/2".

**CB/KIT** £5.55



#### **TOOL & BIT CLEANER**

An industrial grade tool and bit cleaner to remove pitch and resin build-up from sawblades, router cutters, planer blades and drill bits etc.

- Industrial strength cleaner for a variety of uses. Acts as an excellent lubricant and increases tool life.
- Provides rust and corrosion protection.
- Has unique properties which breaks the molecular bond and lifts the dirt from the tool as opposed to eating away the dirt like citrus cleaners and other chemicals.
- Can be used to keep saw table machine surface top rust free.
- Applied by spraying onto tool from a distance of 100mm, allow to soak in for a few minutes, then wipe clean with a cloth or sponge.
- Biodegradable, earth and human friendly. Non-toxic and non-flammable.

#### **CLEAN/500** £19.83

Supplied in a 532ml pump action spray bottle. Clean tools and cutters





Router Cutters, Tools and Sawblades Industrial strength spray on cleaner removes resin build-up and grime. Just spray, soak, then wipe or scrub residue off.

#### Prolong machinery life

VIDEO TO





Sawing Machines, Bandsaws, Sanding Belts and Machine Beds

So versatile - cleaner also acts as a rust inhibitor, prevents corrosion and reduces down-time

#### **TRENDIWAX**

Wax Lubricant

- Extends sawblade life by keeping blade cool at cutting points.
- For use when sawing aluminium. Use at regular intervals.
- Apply directly onto the teeth of a stationary blade.

**TRENDIWAX** (342g) £9.80

#### RESIN CLEANER

Spray-on resin remover and cutter cleaning liquid.

- · Simply spray on and wipe off.
- · Supplied in pump action dispenser.
- Ideal for sawblades, router bits, planer blades and drill bits etc.
- · Corrosion inhibiting agent prevents rusting of blades whilst being cleaned.
- · Liquid has dissolving properties that quickly and harmlessly remove caked on resin

**RESIN/100** (100ml) £11.92 RESIN/600 (600ml) £24.34 **RESIN/2500** (2500ml) £42.49

Supplied with a separate pump action dispenser





Cleans router cutters.







Use as a lubricant





Router Cutter Bearings, Screws and Handsaws Lubricate your bearings to increase tool life. Soak screws for easy driving and keep handsaws in pristine condition to prevent binding



# Snappy

# QUICK RELEASE DRILL SYSTEM

The Quick Release Drill System











#### **CHUCKS & HOLDERS**

QUICK CHUCKS	236
HAND DRIVER	236
DOUBLE GROOVE BIT HOLDERS	245
SCREWDRIVER BIT HOLDERS	246
90° ANGLED DRIVER	246
FLEXIBLE DRIVER	247

#### **WOOD DRILLS**

DRILL BITS	237
COUNTERSINKS	238
PLUG CUTTERS	239
DRILL BIT GUIDES & COUNTERBORES	239
TCT MACHINE BITS, STEPPED DRILLS, DRILL SAW & POCKET HOLE DRILL	240
FLAT BITS & FORSTNERS	241
AUGER BITS	241
AUGER BIT SET, WOOD HOLE SAW SET & FLIP OVER SET	242

#### SPECIALIST DRILLS

GLASS & MASONRY DRILL BITS	243
METAL TWIST BITS	243
STEPPED & TAPERED DRILLS	244
STEP REAMERS	244

# FESTOOL® CENTROTEC COMPATIBLE TOOLS

CHUCKS & HOLDERS	245
COUNTERSINKS	245
DRILL BIT GUIDES	245
SCREWDRIVING	
COLOUR RING BIT SETS	247
SCREWDRIVER BITS	248-249
IMPACT DRIVER BITS	248
TOOL HOLDER SETS	250

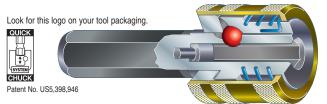
#### The Quick Release Drill System


- The most effective way to increase productivity for drilling & fixing.
- For use with power drills and screwdrivers.
- Compatible with direct-drive 1/4" hex shank power bits.



- The spring-loaded Quick Chuck fitted to a drill, enables the guick change range of tooling to be interchanged quickly.
- The most comprehensive range of Quick Change tooling on the market.

#### **HOW DOES THE QUICK CHUCK WORK?**





#### USING QUICK **CHUCK IN A** DRILL

The Quick Chuck is fitted into a drill, with a standard 3/8" key or keyless chuck. Six flats on the shank ensure precise location in the chuck

Any direct drive 1/4" hex bits, can then 'snap' into the Quick Chuck and are held positively in place.

A spring-loaded outer sleeve in the Quick Chuck makes it easy to remove attachments.

#### **QUICK CHANGE TOOLS**



#### **PLACING TOOLS** DIRECT INTO IMPACT DRIVER CHUCK

Quick change hex shank tools will fit the chuck of an impact driver directly.



#### **PLACING TOOLS** DIRECT INTO A DRILL CHUCK

The hex shank can also be fitted directly into keyed and keyless chucks.

#### **QUICK CHUCKS**



#### STANDARD QUICK CHUCK

The Quick Chuck is fitted into a standard 3/8" key or keyless chuck. Quick Change hex shank attachments or any direct drive 1/4" hex bits can then 'snap' in effortlessly. Six flats on the shank ensure precise location in the chuck.

A sprung-loaded outer sleeve makes it easy to remove attachments.

**SNAP/QC** £12.59



#### SDS PLUS SHANK QUICK CHUCK

For SDS+ plus drills. Hammer action must be switched off when used.

SNAP/QCSDS £17.47



#### CENTROTEC QUICK CHUCK


Festool® Centrotec compatible shank fitting.

**SNAP/F/QC** £22.90

#### YANKEE® SHANK QUICK CHUCK

For 5/16" No. 131A Yankee® Spiral ratchet screwdrivers (large). The Quick Chuck replaces a standard bit and then enables hex shank direct drive tools to be used.

SNAP/QCYL £17.47





#### **HEX SHANK KEYLESS CHUCK**

For use in Quick Chucks or impact drivers. Has a clamping capacity of 0.8mm (1/32") to 6mm (1/4"). Enhanced gripping power when compared to traditional key type drill chucks. Lightweight with plastic body.

**SNAP/HKLC/6** 

£16.67





#### **MAGNETIC QUICK CHUCK**

Improved design with smaller 15mm diameter body. 60mm long magnetic chuck which accepts hex shank fitting and insert screwdriver bits. (Magnet will hold wood screws when used with insert bits.)

**SNAP/QCM** £16.25





#### HAND-DRIVER

This Quick Chuck with sturdy plastic handle, allows the use of hex shank direct drive tools. Supplied with a magnetic screwdriver holder and No. 2 Pozi® bit.

**SNAP/HAND/1** £12.59



Comprises a hand driver and a 31 piece bit set.

SNAP/DRV/SET £20.25





#### DRILL BITS

#### HSS

#### **DRILL BITS**


These HSS drill bits are gripped by a spring steel collet into the hex shaft. The hex shanks snap into the Quick Chuck.

7 PIECE DRILL SETS	
Product Ref.	Price

SNAP/D/SET (Imperial) £27.26 SNAP/D/SET/2 (Metric) £27.26

#### **INDIVIDUAL DRILLS**

Drill Size	Product Ref.	Price
1/16" (1.6mm)	SNAP/D/2	£4.49
3/32" (2.38mm)	SNAP/D/3	£4.49
1/8" (3.2mm)	SNAP/D/4	£4.49
5/32" (3.96mm)	SNAP/D/5	£4.49
3/16" (4.8mm)	SNAP/D/6	£4.61
7/32" (5.5mm)	SNAP/D/7	£5.30
1/4" (6.35mm)	SNAP/D/8	£5.30
1mm	SNAP/D/1MM	£4.49
2mm	SNAP/D/2MM	£4.49
3mm	SNAP/D/3MM	£4.49
4mm	SNAP/D/4MM	£4.49
5mm	SNAP/D/5MM	£4.49
6mm	SNAP/D/6MM	£4.61
7mm	SNAP/D/7MM	£5.56



#### HEX DRILL 7 PIECE SET A set of seven quick change hex shank through hole drills for drilling timber, diameters 1.5mm, 2mm, 2.5mm, 3mm, 4mm, 5mm and 6mm. Supplied in a storage tube. SNAP/HD/SET £10.48



# HSS

#### **TAPERED DRILLS**

A range of HSS tapered drills for use with drill adapters and drill countersinks.

Drills pilot and tapered clearance holes for wood screws in one operation.

Drill sizes range from 2.0mm - 6.3mm. Replaces the standard drill bits.

Drill Size	Product Ref.	Price
2.5mm (3/32")	WP-SNAP/DT/24 +	£1.79
4.8mm (3/16")	WP-SNAP/DT/48 +	£3.08
6.3mm (1/4")	WP-SNAP/DT/63 +	£3.85



#### **DEPTH STOP**

Adjustable depth stops to fit Quick Change Drill Countersinks. Two sizes offered 3/8" (for SNAP/CS/4-10) and 1/2" (for SNAP/CS/12) diameter. Supplied with hex key.

For countersinks only. Not suitable for metric set.

Product Ref.	Price
SNAP/DS/38	£3.31
SNAP/DS/12	£3.31



#### HSS WS

#### HEX DRILL BIT **SET 16 PIECE**

Hex shank drill bit set in fabric tool holder for drilling wood, plastics and metals. Includes eight HSS fully ground TiN coated twist drill bits, sizes 2, 2.5, 3, 4, 5, 6, 7 and 8mm for wood, metal and plastic.

Also includes eight Carbon Steel dowel (Brad point) roll fluted drill bits, sizes 3, 4, 5, 6, 7, 8, 9 & 10mm for deep boring of

**SNAP/HD1/SET** £23.81

#### SPARE EMPTY HOLDER

Removable inner section and removable elasticated cartridges. Accepts twenty four 150mm bits and eight insert bits. Size: 123mm x 170mm.

**SNAP/TH/A** £12.59



#### WS

#### **HEX DOWEL DRILLS**

Carbon Steel lip and spur dowel (Brad point) roll fluted drill bits for deep boring of wood to accept dowels.

Drill Size	Product Ref.	Price
6mm	SNAP/DD/6MM	£2.03
8mm	SNAP/DD/8MM	£2.14
10mm	SNAP/DD/10MM	£2.26

#### **DOWELS**

See page 198 for

#### **DOWEL DRILL DEPTH** COLLAR 3 PACK

For 6mm, 8mm and 10mm drills. Adjustable position steel collar limits drilling depth. Set comprises one of each size of collar and hex key.

SNAP/COL/PK1 £5.06



#### HSS

#### **WOOD TWIST DRILL SET**

5-piece drill bit set of lip and spur (Brad point) dowel drills for drilling blind holes in wood. Drill bit diameters of 3mm, 4mm, 5mm, 6mm and 8mm. The one-piece premium quality drills bit are ground from High Speed Steel for long life and strength. The bits have two optimised cutting spurs and centre point for a fast and clean entrance holes. The flutes are specially ground for fast, clean, straight





#### **COUNTERSINKS**

#### DRILL COUNTERSINKS 5 Piece Countersink Set WS

Heat-treated Tool Steel countersinks with HSS drills They are adjustable for different length screws and can produce a counterbored hole.

They are available in five screw sizes. The drills produce pilot holes only. The five piece set comprises 5/64", 3/32", 7/64", 1/8" and 9/64" drill bits.



#### INDIVIDUAL DRILL COUNTERSINKS Imperial size

Drill Dia.	Screw	No.	СВ		
mm	S/W	H/W	Ømm	Product Ref.	Price
2 (5/64")	-	4	9.5	SNAP/CS/4	£7.17
2.38 (3/32")	6	-	9.5	SNAP/CS/6	£7.17 •
2.75 (7/64")	8	6	9.5	SNAP/CS/8	£7.17
3.2 (1/8")	10*	8*	6.3	SNAP/CS/1814	£8.69
3.25 (1/8")	10	8	9.5	SNAP/CS/10	£7.17
3.25 (1/8")	10	8	12.7	SNAP/CS/10A	£7.17 •
3.5 (9/64")	12	10	12.7	SNAP/CS/12	£7.17
3.57 (9/64")	12	10	9.5	SNAP/CS/10H	£8.69 •
3.96 (5/32")	No.7 cl	earance	9.5	SNAP/CS/7C	£8.69 •
4.76 (3/16")	No.9 cl	earance	9.5	SNAP/CS/9C	£8.69 •

Denotes suitable plug cutter size. See Plug Cutters. \*Trim Screw

#### SPARE IMPERIAL DRILL TEN PACKS

Supplied in a storage tube.

Drill Size	Product Ref.	Price
2mm (5/64")	SNAP/DB564/10	£12.59
2.38mm (3/32")	SNAP/DB332/10	£12.59
2.75mm (7/64")	SNAP/DB764/10	£13.27
3.25mm (1/8")	SNAP/DB18/10	£15.35
3.5mm (9/64")	SNAP/DB964/10	£15.35
2 x each size	SNAP/DB/PK1	£12.59

#### SPARE IMPERIAL DRILL BITS INDIVIDUAL

Drill Size	Product Ref.	Price				
2mm (5/64")	WP-SNAP/D/564	£1.84				
2.38mm (3/32")	WP-SNAP/D/332	£1.84				
2.75mm (7/64")	WP-SNAP/D/764	£1.84				
3.25mm (1/8")	WP-SNAP/D/18	£1.84				
3.5mm (9/64")	WP-SNAP/D/964	£1.84				
Set Screw	WP-SNAP/GSW/1	£1.06				



#### PLUG **CUTTERS**

See page 239 for full

#### TCT

#### **DRILL COUNTERSINK WITH ROTATING DEPTH STOP**

Tungsten Carbide Tipped countersink with drill and adjustable non-marring rotating depth stop. Drill countersink with adjustable short series drill bits. Tungsten Carbide Tipped for longer life on abrasive materials.

ipped for longer life on abradive materials.						
Drill Size	Screv S/W	v No. H/W	CBØ	Product Ref.	Price	
2.8mm	8	6	9.5mm	SNAP/CSDS/8T0	£21.84 •	
3.2mm	10	8	9.5mm	SNAP/CSDS/10T	°C £21.84	
3.6mm	12	10	12.7mm	SNAP/CSDS/12T	°C £21.84	
4mm	M4*	M4*	10.0mm	SNAP/CSDS/4M	MT £21.31	
5mm	M5*	M5*	12.7mm	SNAP/CSDS/5M	MT £27.73	
6mm	M6*	M6*	12.7mm	SNAP/CSDS/6M	MT £27.32	

\* Clearance hole for machine screw. SPARE DRILL BITS INDIVIDUAL

0.7					
Drill Size	Product Ref.	Price			
2.8mm (7/64")	WP-SNAP/D/764S	£3.31			
3.2mm (1/8")	WP-SNAP/D/18S	£3.31			
3.6mm (9/64")	WP-SNAP/D/964S	£3.31			
4mm	WP-SNAP/D/4MS	£3.22			
5mm	WP-SNAP/D/5MS	£3.22			
6mm	WP-SNAP/D/6MS	£3 22			




**DRILL COUNTERSINKS** 5 Piece Countersink Set TC1

Tungsten Carbide Tipped version of the drill countersink sets with adjustable HSS drill. These tools can be used in abrasive materials such as laminated chipboard. The drills produce pilot holes only and can produce a counterbored hole. The five piece imperial size set comprise 5/64", 3/32", 7/64", 1/8" and 9/64" drill bits.

SNAP/CSTC/SET £59.81

Denotes suitable plua cutter size. See Plug Cutters.



Screw	Sizes

 $No.6 = 3.5 mm \varnothing$ No.8 = 4mmØ

No.10 =  $5mm\emptyset$ No.12 = 5.5mmØ INDIVIDUAL DRILL COUNTERSINKS

Imperial size

Drill Dia. mm		w No. H/W	CB Ømm	Product Ref.	Price	
2 (5/64")	-	4	9.5	SNAP/CS/4TC	£12.59	•
2.38 (3/32")	6	-	9.5	SNAP/CS/6TC	£12.59	
2.75 (7/64")	8	6	9.5	SNAP/CS/8TC	£12.59	
3.25 (1/8")	10	8	9.5	SNAP/CS/10TC	£12.59	
3.5 (9/64")	12	10	12.7	SNAP/CS/12TC	£12.59	

#### Metric size


Drill Dia	a. Screv	w No. H/W	Product Ref.	Price	
3	5mm	4mm	SNAP/CS/3MMTC	£13.91	
4	M4*	M4*	SNAP/CS/4MMTC	£13.91	
5	M5*	M5*	SNAP/CS/5MMTC	£20.25	
6	M6*	M6*	SNAP/CS/6MMTC	£20.25	
* Clea	rance hol	e for mad	chine screw		

#### DRILL COUNTERSINK **DEPTH STOP ACCESSORY**

Rotating depth stop accessory that can be used with 9.5mm and 12.7mm adjustable drill countersinks to allow consistent drilling depths. Fits SNAP/CS/6-12 but not for TCT drill countersinks.

SNAP/ROT/DS £18.52





#### WS

#### HOLE COUNTERSINK

Single flute 82 degree Tool Steel countersink for countersinking holes in wood and man-made hoards

**SNAP/CSK/1** £12.59



## HSS

#### **DE-BURRING** COUNTERSINK

Two High Speed Steel de-burring countersinks for wood and plastic, and de-burring holes in metal.



Enlargement	Product Ref.	Price
5mm to 13mm	SNAP/CSK/2	£24.00
7mm to 20mm	SNAP/CSK/3	£39.59





Denotes suitable

plug cutter size. See Plug Cutters.


#### **PLUG, DRILL BIT GUIDES & COUNTERBORES**




#### WS

#### **STANDARD** PLUG CUTTERS

Made from Tool Steel. Creates plugs in wood to suit drill countersinks. Plugs have







#### STANDARD PLUG **CUTTER SETS 4 PIECE**

Plug cutter sets for particular screw sizes. Each set comprises Quick Chuck, drill/countersink, Pozi® screwdriver bit and standard plug cutter.

Screw Size		Plug Cutter	Bit Size	Product Ref.	Price
No. 6	2.5	9.5	No.2	SNAP/PC6/SET	£32.68
No. 8	2.75	9.5	No.2	SNAP/PC8/SET	£32.68
No. 10	3.2	9.5	No.2	SNAP/PC10/SET	£32.68
No. 12	3.5	12.7	No.3	SNAP/PC12/SET	£36.14



#### STANDARD PLUG CUTTER & **COUNTERSINK SET 4 PIECE**

4 piece set comprises No.8 and No.10 drill countersinks (Ref. SNAP/CS/8 & SNAP/CS/10A) and 3/8" and 1/2" plug cutters (Ref. SNAP/PC/38 and SNAP/PC/12).

**SNAP/PC/A** £36.81



#### **TUBE PLUG CUTTERS**

Made from Tool Steel. Creates longer length parallel sided plugs in wood. Recommended for use with a pillar drill.

Plug Size	Product Ref.	Price
8mm	SNAP/PC/8T	£17.47
9.5mm (3/8")	SNAP/PC/95T	£17.47
10mm	SNAP/PC/10T	£17.47
12mm	SNAP/PC/12T	£20.25
12.7mm (1/2")	SNAP/PC/127T	£20.25
16mm	SNAP/PC/16T	£27.13

Denotes suitable drill countersinks. See Drills and Countersinks.



#### **TUBE PLUG CUTTER & COUNTERSINK SET 4 PIECE**

4 piece set comprises No.8 and No.10 drill countersinks (Ref. SNAP/CS/8 and SNAP/CS/10A) and 3/8" and 1/2" diameter tube type plug cutters (Ref. SNAP/PC/95T and SNAP/PC/127T).

**SNAP/PC/AT** £44.75





#### HSS

#### **DRILL BIT GUIDES**

Self-centring drills for the accurate drilling of pilot holes for fittings such as hinges to ensure exact alignment. Easily dismantled for cleaning and supplied with a HSS drill bit.

#### INDIVIDUAL DRILL BIT GUIDES

Drill Dia.	Screw	Product Ref.	Price
2mm (5/64")	No.6	SNAP/DBG/5	£10.48
2.75mm (7/64")	No.8	SNAP/DBG/7	£10.48
3.5mm (9/64")	No.10	SNAP/DBG/9	£10.17
4.36mm (11/64")	No.12	SNAP/DBG/12	£23.03

#### **DRILL BIT GUIDE & QUICK CHUCK SET** 4 PIECE

Set comprising a Quick Chuck and three sizes of drill bit guides 5/64", 7/64" and 9/64" for the accurate fitting of hinges.

SNAP/DBG/SET £42.49



# **DRILL BIT GUIDE SET 5**

Comprises three sizes of drill bit guides 5/64", 7/64" and 9/64", plus No.2 Phillips® and No.2 Pozi® 50mm screwdriver bits.

**SNAP/DBG/A** £31.56



#### **SPARE DRILLS**

Drill Dia.	Product Ref.	Price
2mm (5/64")	WP-SNAP/D/5L	£3.85
2.75mm (7/64")	WP-SNAP/D/7L	£3.85
3.5mm (9/64")	WP-SNAP/D/9L	£3.85
4.36mm (11/64")	WP-SNAP/D/11L	£5.55
Spring (for 5-9)	WP-SNAP/SPR/1	£1.84
Spring (for 12)	WP-SNAP/SPR/2	£3.17
Grub screw	WP-SNAP/GSW/1	£1.06

#### SPARE DRILLS FIVE PACK

Drill Size	Product Ref.	Price
2mm (5/64")	SNAP/DB5L/5	£18.41
2.75mm (7/64")	SNAP/DB7L/5	£18.41
3.5mm (9/64")	SNAP/DB9L/5	£18.41
4.36mm (11/64")	SNAP/DB11L/5	£26.47



#### HSS SHELF SUPPORT DRILL BIT GUIDE 5MM

Lip and spur 5mm HSS drill bit guide, which when used with a template will allow 5mm diameter blind holes to be drilled for 5mm shelf supports. Guide diameter is 9.5mm (3/8").

**SNAP/SS/5MM** £29.90

**SPARE 5MM DRILL BIT WP-SNAP/D/5S** £11.11



#### **COUNTERBORES**

Five sizes of counterbore with a slow spiral drill fitted. Tungsten Carbide Tipped for use in abrasive materials.





C/Bore Dia.	Product Ref.	Price
9.5mm	SNAP/CB/1TC	£18.79
9.5mm	SNAP/CB/2TC	£18.79
12.7mm	SNAP/CB/3TC	£19.46
12.7mm	SNAP/CB/4TC	£20.25
15.9mm	SNAP/CB/5TC	£21.57
	9.5mm 9.5mm 12.7mm 12.7mm	Dia.         Product Ref.           9.5mm         SNAP/CB/1TC           9.5mm         SNAP/CB/2TC           12.7mm         SNAP/CB/3TC           12.7mm         SNAP/CB/4TC

#### **SPARE DRILLS**

Drill Dia.	Product Ref.	Price
4mm	WP-SNAP/D/4C	£2.51
4.75mm	WP-SNAP/D/47C	£3.17
6.35mm	WP-SNAP/D/63C	£3.85





#### **MACHINE BITS & SPECIALTY DRILL BITS**

# 35MM MACHINE BIT WITH DEPTH STOP

A TCT machine bit for circular hinges with built-in depth stop to control depth of cut. The lightweight aluminium depth stop can be adjusted in height to suit hinge recess depth. For use on MDF and laminated chipboard only.













Product Ref.

SNAP/MB/15TC +

SNAP/MB/26TC

SNAP/MB/35TC

SNAP/MB/40TC


#### TCT

#### **MACHINE BITS**

Diameters 26mm, 35mm and 40mm are for drilling blind holes for circular hinges in kitchen and cabinet doors.

The 15mm bit is designed to suit cam and dowel fixings.

It is recommended that these bits are used in a drill stand. Tungsten Carbide Tipped.





#### HSS

#### STEPPED DRILL BITS

## For 'Ready-to-Assemble' bolts

Step drills with hardened cutting edges for furniture construction bolts. Two sizes offered to suit 5mm diameter and 7mm diameter bolts.

For use in chipboard with minimum board thickness of 15mm. Supplied with HSS slow spiral drill. Stepped drills have diameters of 3.5/5.0/7.0 and 5.0/7.0/10.0 respectively.



For Bo	lts Dia. mm	Product Ref.	Price
5mm	3.5/5.0/7.0	SNAP/RTA/5	£13.91
7mm	5.0/7.0/10.0	SNAP/RTA/7	£16.03

Depth stop collar accessory also available to give consistent depths of cut.

For SNAP/RTA/7 SNAP/RTA/DS7 + £3.08

Spare Drills for RTA

For SNAP/RTA/5 WP-SNAP/D/35R £2.51
For SNAP/RTA/7 WP-SNAP/D/5R £3.17



#### HSS

#### **DRILL SAW**

Solid one-piece HSS Quick Change shank drill saw.

6mm in diameter with 90mm overall length. Ideal for drilling a slot or opening up holes in wood, MDF and plywood.







#### HSS

Bit Dia

15mm

26mm

35mm 40mm

#### **POCKET HOLE DRILL**

A 9.5mm (3/8") diameter stepped High Speed Steel drill for use with Pocket Hole Jigs. Supplied with depth setting collar.

#### **SNAP/PHD/95** £17.47





#### **POCKET HOLE JIGS**

#### **STANDARD**

For fast and accurate joining of timber and plywood giving strong instant joints.

See page 201.

Product Ref.
PH/JIG




#### MINI

Compact version of the standard jig, ideal for use on site. See page 203.

Product Ref.

PH/JIG/M



#### FLAT BITS, FORSTNERS & AUGERS

#### WS

#### FLAT BITS 152MM

Economical bits for cutting quick holes in timber. Made from Carbon Steel. 152mm overall length with centre point, back tapered cutting edge and ground chip breakers.

#### **3 PIECE SET**

Three piece set comprising a 16mm, 19mm and 25mm diameter flat bit.

#### **SNAP/FB1/SET** £11.05

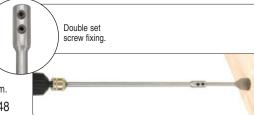


Drill Dia.	Product Ref.	Price
8mm	SNAP/FB/8	£3.58
10mm	SNAP/FB/10	£3.70
12mm	SNAP/FB/12	£4.22
13mm	SNAP/FB/13	£4.22
14mm	SNAP/FB/14	£4.22
16mm	SNAP/FB/16	£4.22
18mm	SNAP/FB/18	£4.22
19mm	SNAP/FB/19	£4.89
20mm	SNAP/FB/20	£4.89
22mm	SNAP/FB/22	£4.89
24mm	SNAP/FB/24	£5.17
25mm	SNAP/FB/25	£4.89
28mm	SNAP/FB/28	£5.55
30mm	SNAP/FB/30	£5.55
32mm	SNAP/FB/32	£5.55
34mm	SNAP/FB/34	£6.22
35mm	SNAP/FB/35	£6.22
38mm	SNAP/FB/38	£6.22

#### **FLAT BIT EXTENSION**

300mm long extension for flat bits. Minimum diameter of flat bit that can be used is 16mm.

**SNAP/FB/EXT** £10.48



#### WS

#### **FORSTNERS 80MM**

High quality forged and ground Carbon Steel short forstner bits for drilling accurate holes. For use with the Quick Chuck. They will also drill overlapping holes. They have an 80mm overall length. The 32mm tool is ideal for Yale® locks.

		,	
	Bit Dia.	Product Ref.	Price
	10mm	SNAP/FS/10	£12.59
	12mm	SNAP/FS/12	£12.59
	15mm	SNAP/FS/15	£13.91
	16mm	SNAP/FS/16	£14.70
	18mm	SNAP/FS/18	£14.70
	20mm	SNAP/FS/20	£17.20
	22mm	SNAP/FS/22	£15.35
	24mm	SNAP/FS/24	£18.79
L	25mm	SNAP/FS/25	£19.20
1	26mm	SNAP/FS/26	£18.14
位開	28mm	SNAP/FS/28	£18.79
	30mm	SNAP/FS/30	£21.05
	32mm	SNAP/FS/32	£21.05
	35mm	SNAP/FS/35	£21.05

**5 PIECE BOXED FORSTNER SET** Sizes 15mm, 20mm, 25mm, 30mm & 35mm.







#### **AUGER BITS 155MM**

Made from Carbon Steel and precision machined. Augers have a spiral point, single flute and an overall length of 155mm. They are ideal for quick, clean deep holes. They must only be used with torque control drills to prevent wrist injury.

Bit Dia.	Product Ref.	Price
10mm	SNAP/AB/10	£7.02
12mm	SNAP/AB/12 +	£9.51
13mm	SNAP/AB/13	£9.80
20mm	SNAP/AB/20 +	£10.79
22mm	SNAP/AB/22 +	£10.79
25mm	SNAP/AR/25 +	£11 57





#### WS STUB AUGER BITS 105MM

Short series augers with 105mm overall length, ideal for drilling between joists. Made from high quality Carbon Steel with screw thread and single spur. They must only be used with torque control drills. The 22mm auger is ideal for mortise latches.



it Dia.	Product Ref.	Price
mm	SNAP/SA/8	£4.89
0mm	SNAP/SA/10	£4.89
3mm	SNAP/SA/13	£5.55
6mm	SNAP/SA/16	£6.36
9mm	SNAP/SA/19	£6.36
0mm	SNAP/SA/20 +	£7.02
2mm	SNAP/SA/22 +	£7.07
5mm	SNAP/SA/25	£8.35
2mm	SNAP/SA/32 +	£9.80





#### **AUGERS & FLIP SET**





#### **WOOD HOLE SAW SET**

High Carbon Steel seven piece wood saw set for use in timber and boards. Six sizes of saw to give hole sizes of 32mm, 38mm, 44mm, 51mm, 57mm and 64mm diameters. Drilling depth of up to 32mm.

SNAP/WS1/SET

£16.00







#### SPECIALIST TOOLS

#### TCT

#### **GLASS DRILL BITS**

A range of eight TCT drills for use on glass, porcelain, tile and mirrors. Not for use on toughened glass. A coolant must be used.

Drill Dia.	Overall Length	Product Ref.	Price
3mm	53mm	SNAP/GD/3MM	£7.02
4mm	58mm	SNAP/GD/4MM	£7.02
5mm	63mm	SNAP/GD/5MM	£7.67
6mm	71mm	SNAP/GD/6MM	£7.67
7mm	89mm	SNAP/GD/7MM	£8.35
8mm	81mm	SNAP/GD/8MM	£8.35
10mm	95mm	SNAP/GD/10MM	£11.11
12mm	105mm	SNAP/GD/12MM	£12.59





#### HSS

#### **METAL TWIST DRILL SET**

5-piece set drill bit set for drilling through holes in metal, wood and most plastics. Drill bits can be used in drills and impact drivers. Drill bit diameters of 3mm, 4mm, 5mm, 6mm and 8mm. The one-piece premium quality drills bit are ground from High Speed Steel (HSS) for long life and strength. The flutes are specially ground for fast clean, straight and true drilling. The set is supplied in a handy storage tube.







#### **INDIVIDUAL MASONRY DRILL BITS**

Forged one-piece range of Tungsten Carbide Tipped masonry drill bits to suit wall plugs.

Flute			
Drill Dia.	Length	Product Ref.	Price
5mm	44mm	SNAP/MD/5	£3.85
5.5mm	55mm	SNAP/MD/55	£3.97
6mm	58mm	SNAP/MD/6	£3.85
7mm	69mm	SNAP/MD/7	£3.85
8mm	63mm	SNAP/MD/8	£3.85
10mm	95mm	SNAP/MD/10	£5.30
12mm	95mm	SNAP/MD/12	£5.30

#### 4 PIECE MASONRY **DRILL SET**

Comprises drill sizes 5, 6, 7 & 8mm.

**SNAP/MD1/SET** £11.92

#### MASONRY DRILL BIT SET 5 PIECE TCT Adjustable coloured depth bands help identify which wall


plug to use and allow drilling depth to be gauged. Yellow for 5mm diameter drill - No.4, 6, 8, 10 (3mm to 4mm) screw.

Red/Orange for 5.5/6mm diameter masonry drill, depending on screw size - No.6, 8, 10 (3mm to 4mm) screw.

Brown for 7mm diameter masonry drill -No.10, 12, 14 (4.5mm to 6mm) screw. Grey for 8mm diameter masonry drill.

SNAP/MD2/SET

£18.53



For drilling into plaster walls and plasterboard.



For drilling into mortar and



For drilling into building blocks.

#### 8 PIECE MASONRY DRILL BIT SET



**WITH COLOUR** CODED DEPTH **GUIDES** 



 $Yellow = 5mm\emptyset$ 6mmØ Brown = 7mmØ 8mmØ



#### SPECIALIST TOOLS

#### HSS

#### STEPPED DRILL

High Speed Steel stepped drill 4mm to 12mm diameter in 2mm increments. For drilling holes in wood, sheet metal and plastic up to 5mm thick.

**SNAP/SD/1** £29.90





#### TAPERED DRILLS

For drilling and enlarging holes in man-made boards and wood up to 6mm thick and in all metals and plastics up to 2mm thick.

Enlargement	Product Ref.	Price
3mm to 7mm	SNAP/TD/1	£23.18
3mm to 14mm	SNAP/TD/2	£20.90



#### STEP REAMERS

Specially for use with hex shank taps fitted into torque control screwdrivers. Ideal for jig-making. One reamer suits three tap sizes.

For Tap Sizes	Product Ref.	Price	
M3.5, M5 & M8	SNAP/SR/1 +	£25.70	
M4, M6 & M10	SNAP/SR/2 +	£26.34	





For use in torque control screwdrivers for threading metals and plastics when jig-making.

Tap Size	Product Ref.	Price
M3.5 x 0.6mm	SNAP/TAP/M35 +	£14.90
M4 x 0.7mm	SNAP/TAP/M4 +	£15.53
M5 x 0.8mm	SNAP/TAP/M5 +	£15.53
M6 x 1mm	SNAP/TAP/M6	£16.67
M8 x 1.25mm	SNAP/TAP/M8	£17.47
M10 x 1.5mm	SNAP/TAP/M10	£18.14



#### **SQUARE DRIVE ADAPTER**

Three sizes for 1/4", 1/2" and 3/8" square drives with ball locator.

A/F	Length	Product Ref.	Price
1/4"	50mm	SNAP/SDA/1	£7.02
3/8"	50mm	SNAP/SDA/2	£9.14
1/2"	50mm	SNAP/SDA/3	£10.48






#### **MAGNETIC NUT DRIVER**

Ideal for bolts, this range of high quality magnetic nut drivers have an overall length of 65mm. The 1/4" and 5/16" A/F nut drivers are suitable for use with sheet metal screws.

A/F	Product Ref.	Price
5.5mm	SNAP/ND/55M	£9.14
6mm	SNAP/ND/6M	£9.14
7mm	SNAP/ND/7M	£9.14
8mm	SNAP/ND/8M	£9.14
10mm	SNAP/ND/10M	£10.48
13mm	SNAP/ND/13M	£12.59
1/4" (6.35mm)	SNAP/ND/635M	£10.48
5/16" (7.94mm)	SNAP/ND/794M	£10.48





#### **NUT DRIVER SET 5 PIECE**

Comprising 5.5mm, 7mm, 8mm, 10mm and 13mm A/F magnetic nut drivers.

SNAP/ND/SET £36.76









#### + While stocks last

#### FESTOOL® CENTROTEC COMPATIBLE TOOLS

# **QUICK CHUCK** Quick chuck with Centrotec compatible shank allowing standard quick release tools to be used in a Festool® drill. **SNAP/F/QC** £22.90

#### WS

#### DRILL COUNTERSINKS

Centrotec compatible shanked Tool Steel countersink with HSS drill bits. Adjustable for different length screws.



Drill Dia.		w No.	CB		
mm	S/W	H/W	Ømm	Product Ref.	Price
2.38 (3/32")	6	-	9.5	SNAP/F/CS6	£17.16
2.75 (7/64")	8	6	9.5	SNAP/F/CS8	£17.16
3.25 (1/8")	10	8	9.5	SNAP/F/CS10	£17.16
3 5 (9/64")	12	10	127	SNAP/F/CS12	£17 16

#### HSS

#### DRILL BIT GUIDES

Centrotec compatible shanked drill bit guides for drilling pilot holes for fittings such as hinges to ensure exact alignment. With HSS drill bit.



Drill Dia.	Screw	Product Ref.	Price
2.75mm (7/64")	No.8	SNAP/F/DBG7	£21.75
3.5mm (9/64")	No.10	SNAP/F/DBG9	£21.75



#### DRILL COUNTERSINK SET

Four drill countersinks in Tool Steel with a bit holder with Centrotec compatible style shanks. For screw sizes No.6 (2.38mm drill), No.8 (2.75mm dia drill), No.10 (3.2mm drill) and No.12 (3.5mm drill).

Heat-treated tool steel countersink with a HSS drill. Adjustable for different length screws. Sizes No. 6, 8 and 10 can produce a 9.5mm (3/8-inch) diameter counterbored hole for wood plugs

Size No.12 creates a 12.7mm (1/2-inch) diameter counterbored hole. The drills produce pilot holes only.

Double groove 75mm long bit holder with dual 1/4-inch hex shank and Centrotec compatible style shank. No.2 25mm Insert Pozi bit.

**SNAP/F/CS/SET** £63.60





#### WS HSS

#### **DRILL BIT GUIDE & COUNTERSINK SET**

Three drill countersinks in Tool Steel and two drill countersinks with Centrotec compatible style shanks. Two self-centering drill bit guides for screw sizes No.8 (2.75mm) and No.10 (3.5mm).

Sprung loaded self-centering bit for drilling pilot holes for hinges to ensure exact alignment. Drill countersinks for screw sizes No.8 (2.75mm dia drill), No.10 (3.2mm drill) and No.12 (3.5mm drill).

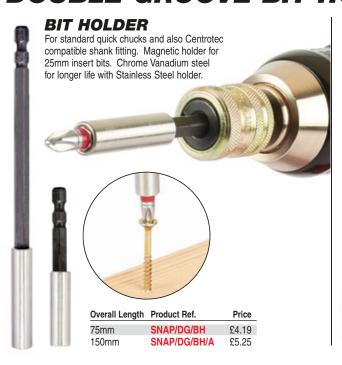
Heat-treated tool steel countersink with a HSS drill. Adjustable for different length screws. Sizes 8 and 10, can produce a 9.5mm (3/8-inch) diameter counterbored hole for wood plugs depending on size.

Size No.12 creates a 12.7mm (1/2-inch) diameter counterbored hole. Drill produce pilot holes only.

SNAP/F/DBG/SET £79.52



#### DOUBLE GROOVE BIT HOLDERS





#### SCREWDRIVER BIT HOLDERS

#### **MAGNETIC SCREWDRIVER BIT HOLDER**

With retractable Magnetic screwdriver bit holder will hold screws onto 25mm insert bits. Retractable rubberised barrel ensures screwdriver bits do not jump out of screw head.

Supplied with one No.2 Pozi® bit.

**SNAP/MSH** £5.15 78mm overall length

#### NO. 12 MAGNETIC **BIT HOLDER**

A larger size magnetic bit holder for 25mm insert bits with retractable barrel. For use with screw sizes up to No.12. Supplied with one No.3 Pozi® bit.

**SNAP/MSH/12** £6.62

120mm overall length

#### **LONG SERIES MAGNETIC** 25MM BIT HOLDER

Extra long magnetic holders for 25mm insert bits. Body diameter 9.4mm. Ideal for awkward and hard to reach screws

Price

OL Product Ref.

150mm **SNAP/BH/6** £13.10 278mm SNAP/BH/11 £16.03

#### **58MM MAGNETIC** 25MM BIT HOLDER

Accepts 25mm insert bits. Quick and easy to use. Magnetic for bit retention.

NAP/BH/58 £6.36 58mm overall length

#### **MAGNETIC SCREWDRIVER HOLDER**

Designed to hold longer screws securely onto the screwdriver bit with an extra magnetic ring. Accepts 25mm insert bits and has an adjustable barrel. Supplied with one No.2 Pozi®

**SNAP/MAG** £11.25 62mm overall length



#### SDS PLUS SHANK **MAGNETIC** 25MM BIT HOLDER

Magnetic bit for SDS+ rotary drill with hammer action stop. Pull forward to lock/release insert bits. Accepts 25mm screwdriver bits.

#### SNAP/BH/SDS

+ £15.16 80mm overall length



#### **OFFLINE** DRIVER

Use drill next to walls. Drills and fixes in tight spaces. Outer sleeve rotates allowing secure positioning.

Shaft swivels to 20° angle. Accepts bothinsert bits and direct drive bits. Includes No.2 Pozi® 25mm insert bit.

SNAP/OFLD

£12.59

#### **MICRO** DIAMETER **BIT HOLDER**

Magnetic holder for 1/4-inch hex 25mm insert bits. Small 10.8mm diameter to allow access into tighter spaces. Pull back ring to release bits, spring-loaded release of bit. Tested to 50 Nm torque. Extra strong magnet N50 (Gauss 3900-4000) to minimise bit loss due to the bits sticking to the screw. Stainless Steel

housing. Not for use with long screws requiring high torque.



OL	Product Ref.			
66mm	SNAP/BH/M	£8.44		
150mm	SNAP/RH/M/A	£10.56		

FOR IMPACT

**DRIVERS** 

#### **IMPACT** DRIVER BIT **HOLDERS**

Magnetic holder for use in quick tool change drills. Two piece design for use with high torque applications. Heavy duty body to withstand impact driver use. Hardened shank to RC45/50 for added strength and black oxide finish for increased resistance to

corrosion. Stainless steel barrel with precision machined steel

shank for accuracy. Use with impact bits.



OL	Product Ref.	Price
66mm	SNAP/BH/ID	£10.25
150mm	SNAP/BH/ID/A	£13.34

#### **ONE TOUCH BIT HOLDER**

Magnetic holders with one touch button for quick and easy release of 25mm insert bits. Small 10.3mm diameter to allow access into tighter spaces.

> Product Ref. Price

66mm **SNAP/BH/OT** £7.59 150mm SNAP/BH/OT/A £10.88



#### 90° ANGLE SCREWDRIVER **ATTACHMENT**

- 90° Angle screwdriver attachment allows access to tight corners.
- · High load gears, max torque 60Nm and ergonomic handle. For use with impact screwdrivers.
- Max. 12V, with max. torque 80Nm, rotation 0-2000 rpm & 0-2500 impacts per minute.
- Quick Change Chuck to ensure tool is held securely.



#### 90° COMPACT ANGLE DRIVER

Compact 90° angle driver with quick change shank that accepts 25mm insert bits and 50mm power drive bits.

- · Allows access to tight corners.
- Use in cordless and corded drills.
- · Use with screwdriver bits in a holder, drill bits and drill countersinks.
- Maximum 49.1Nm torque.
- Two position side handle with storage facility.
- Includes No.2 Pozi® 17mm mini hex bit & 25mm hex bit.

**SNAP/ASA/3** £46.33

With 17mm mini insert bit fitted.



No.2 Pozi®3 pack **SNAP/IPZ2M/3** £3.85



— 39.5mm²

\_\_33mm

Assorted screwdriver bits for a wide range of applications.

- Colour rings on bits to denote type.
- Magnetic quick chuck bit holder.
- High grade hardened tool steel.
- Includes 75mm long power drive bits.

#### **SNAP/SB3/SET** + £31.33

#### 75mm power drive bits

- 3x Phillips® No.1, No.2 & No.3
- 3x Pozi® No.1, No.2 & No.3
- Slotted 6mm x 0.9mm

#### 25mm insert bits

- 9x Philips® No.1 x 3, No.2 x 3 & No.3 x 3
- Pozi® No.1 x 3, No.2 x 3 & No.3 x 3
- Slotted 4mm x 0.6mm x 2, 5mm x 0.7mm x 2 & 6mm x 0.9mm x 2
- 3x Hex 3mm, 4mm & 5mm A/F
- **14x** Torx<sup>®</sup> T10 x 2, T15 x 2, T20 x 2, T25 x 2, T27 x 2, T30 x 2 & T40 x 2
- Tamper-proof Torx® T10, T15, T20, T25, T27, T30 & T40



**SNAP/FMD/1** £17.41

HOLDER

• For use with hand driver or drill.

**FLEXIBLE BIT** 

• Locking, magnetic quick release bit holder. • Designed to flex and hold at various angles.

Accepts insert bits and direct drive bits.

and countersinks (max. 12.7mm).

· Ideal for access to awkward screws.

• Can be used with hex shank drill bits (max. 10mm)


For insert and direct drive shank screwdriver bits.




Not to be used with flat bits, auger bits, forstner bits, large diameter drilling tools over 10mmØ, nut









#### 41 PIECE

#### **COLOUR RING SCREWDRIVER BIT SET**

#### With hand ratchet screwdriver and mini ratchet.

- Assorted screwdriver bit set for a wide range of applications, including a selection of mini bits with 5/32" (4mm shanks).
- Colour rings on bits to denote type for ease of identification.
- High grade hardened tool steel.

**SNAP/SB4/SET** £37.08

Accepts both 1/4" and 5/32"

While stocks last

hex bits.

- Hand ratchet screwdriver for use with 1/4" hex inserts bits when screwing into awkward places.
- Handy mini size 1/4" square drive ratchet wrench for use with 1/4" A/F square sockets.
- Bit holder that accepts both 1/4" and 5/32" mini

SPARE MINI HEX BIT HOLDER

**P/BH/SB4** + £6.05

#### **INCLUDES 5/32**'

# 25mm insert bits

- 2x Philips® No.1 & No.2
- Pozi® No.1 & No.2 2x

Contents:

- Slotted 4mm x 0.6mm & 6mm x 1mm 2x
- 2x Hex 4mm & 6mm A/F
- Torx® T10, T15, T20 & T25 4x
- 1/4" A/F square drive bit adaptor

#### 5/32" mini insert bits

- 3x Phillips® No.000, No.00 & No.0
- Pozi® No.0 & No.1
- Slotted 1mm x 0.3mm, 1.5mm x 0.4mm, 2mm x 0.5mm & 3mm x 0.6mm
- Hex 0.9mm, 1.3mm, 1.5mm, 2mm, 2.5mm & 3mm A/F
- **5x** Torx<sup>®</sup> T5, T6, T7, T8 & T9

#### Socket:

Chrome Vanadium spline sockets 1/4" A/F square drive, 6mm, 7mm, 8mm, 10mm & 13mm A/F



# breakage giving excellent torque • Feature a torsion zone to minimise the possibility of breakage. · Supplied in flip lid storage case



#### 25mm insert bits

transmission.

with belt clip.

2x Philips® No.1 & No.2

15 PIECE

**BIT SET** 

**COLOUR RING** 

SCREWDRIVER

Assorted screwdriver bits for

a wide range of applications.

• Colour rings on bits to denote type.

• Torsion zone round shaft to reduce

Magnetic guick chuck bit holder.

• High grade hardened tool steel.

- 2x Pozi® No.1 & No.2
- 2x Slotted 4mm x 0.6mm & 6mm x 1mm
- 2x Hex 4mm & 6mm A/F
- 4x Torx® T10, T15, T20 & T25
- 1x Magnetic bit holder







#### **25MM SCREWDRIVER BITS**



#### POZI® INSERT BITS 25MM

Packs of 25mm Pozi® bits. High grade Tool Steel for extra wear resistance. Forged for strength & longer life.

Size Bits	Qty	Product Ref.	Price
Pozi® No.0	3	SNAP/IPZ0/3*	£3.85
Pozi® No.1	10	SNAP/IPZ1/10	£9.79
Pozi® No.2	10	SNAP/IPZ2/10	£9.79
Pozi® No.2	20	SNAP/IPZ2/20	£17.82
Pozi® No.3	10	SNAP/IPZ3/10	£9.79



#### PHILLIPS® INSERT BITS **25MM**

Packs of 25mm Phillips® bits. High grade Tool Steel for extra wear resistance. Forged for strength & longer life.

Size Bits	Qty	Product Ref.	Price	
Phillips® No.1	10	SNAP/IPH1/10	£9.79	
Phillips® No.2	10	SNAP/IPH2/10	£9.79	
Phillips® No.2	20	SNAP/IPH2/20	£17.82	
Phillips® No.3	10	SNAP/IPH3/10	£9.31	



#### POZI® NO.2 INSERT BIT 25MM & BIT HOLDER

Set comprises ten standard high grade Tool Steel No.2 Pozi bits & Quick Change bit holder. For No. 6, 8 & 10 screws.

Round shaft bits to reduce breakage giving excellent torque transmission & extended life. Supplied in reusable storage tube.







#### 2 PIN SPANNER BITS 25MM 4 PACK

High grade Chrome-Vanadium Steel two pin spanner bits, sizes No. 4, 6, 8 and 10.

**SNAP/ISB/A** + £13.32



#### **MAGNETIC SCREWDRIVER BIT** SET 25MM 31 PIECE

Comprises magnetic holder and 30 assorted 25mm screwdriver bits in a plastic case with belt clip. Includes 3 Pozi®, 3 Phillips®, 4 flats, 10 Torx®, 7 hex & 3 square bits.

**SNAP/SB2/SET** £16.03



# **25MM DRYWALL BITS**

#### **DRYWALL PHILLIPS NO.2 INSERT BITS 2 PACK**

A pack of two 25mm No. 2 Phillips insert bits with plastic depth stop for drywall (plaster board).

Plastic depth stop will not corrode/rust and will therefore not tear the drywall paper.

Bits are forged high grade Chrome-Vanadium Steel, through hardened.

Highly resistant to wear.

**SNAP/DWIPH2/2** £4.64





#### ESPECIALLY DESIGNED FOR IMPACT DRIVERS

- Torsion Zone for increased life.
- Optimum Hardness for tough fastenings.
- Cellulose acetate sleeve retains broken tip if it shatters.
- Maximum safety with retainer sleeve.

#### **NO.2 INSERT BITS 29MM 5 PACK**

Especially designed for impact drivers. Torsion zone for maximum life. Optimum hardness for high loads. Cellulose acetate sleeve retains broken tip if it shatters. Will fit impact driver without need for bit holder.

Size Bits	Qty	Product Ref.	Price
Pozi® No.2	5	SNAP/IPZ2I/5	£12.25
Phillins® No 2	5	SNAP/IPH2I/5	£12 25



#### NO.2 BITS 49MM 3 PACK

High quality torsion zone direct drive No.2 Pozi® & Phillips® bits. For use in impact drivers.

Size Bits	Qty	Product Ref.	Price
D:0 N- 0	0	CNIAD/DZOL/O	011.00
Pozi® No.2	3	SNAP/PZ2I/3	£11.30
Phillips® No.2	3	SNAP/PH2I/3	£11.36

#### 50MM SCREWDRIVER BITS



#### POZI® BITS 50MM

High grade tool steel screwdriver bits, hardened for ultimate wear resistance. The bits have 1/4" hex shanks to fit the Quick Chuck directly.

Size Bits	Qty	Product Ref.	Price
Pozi® No.1	3	SNAP/PZ/1	£7.02
Pozi® No.2	3	SNAP/PZ/2	£9.14
Pozi® No.3	3	SNAP/PZ/3	£11.11
Mixed pack of above	3	SNAP/PZ/12	£8.35
Pozi® No.4	2	SNAP/PZ/4	£7.81

The No.4 Pozi® bit is ideal for 10mm window anchor and frame fixing screws.



#### HEX BITS 50MM

Single piece high grade power drive 50mm hex bit. Ideal for KD furniture. Sizes 3mm, 4mm or 5mm A/F.

Size Bits	Product Ref.	Price
Hex 3mm A/F	SNAP/HEX/3MM	£4.15
Hex 4mm A/F	SNAP/HEX/4MM	£4.15
Hex 5mm A/F	SNAP/HEX/5MM	£4.15



#### **SQUARE DRIVE BITS 50MM**

A range of 50mm square 'Robertson®' screwdriver bits, available in 3 sizes.

Size Dits	Qty	Product Rei.	Price	
Robertson® No.1 (3/32")	3	SNAP/SQ/1	£4.64	
Robertson® No.2 (1/8")	3	SNAP/SQ/2	£4.64	
Robertson® No.3 (9/64")	3	SNAP/SQ/3	£4.64	
Mixed pack of above	3	SNAP/SQ/123	£4.50	



#### PHILLIPS® BITS 50MM

High grade tool steel screwdriver bits, hardened for ultimate wear resistance. The bits have 1/4" hex shanks to fit the Quick Chuck directly.

Size Bits	Qty	Product Ref.	Price
Phillips® No.1	3	SNAP/PH/1	£7.02
Phillips® No.2	3	SNAP/PH/2	£9.14
Phillips® No.3	3	SNAP/PH/3	£11.11
Mixed pack of above	3	SNAP/PH/123	£8.35



#### **BALL END HEX BITS 50MM**

A range of 50mm ball end hex screwdriver bits. The ball hex allows a working angle up to 20°.

Set A includes three bits 2mm, 2.5mm & 3mm A/F. Set C includes two bits 7mm & 8mm A/F.

Size Bits	Product Ref.	Price
Hex 2, 2.5, 3mm	SNAP/HEX/A +	£15.42
Hex 7, 8mm	SNAP/HEX/C +	£15.42



#### **SECURITY TORX® T25** BITS 50MM

Pack of ten 50mm Torx® T25 screw driver bits. The bits have 1/4" hex shanks to fit the Quick Chuck directly. Tamper-proof style with pin socket for security screws.

**SNAP/TX25T/10 +** £11.57



#### HAND-DRIVER See page 236.



ASSOCIATED PRODUCTS

SNAP/HAND/1

#### BIT HOLDERS

See page 246.



#### TOOL HOLDER SETS

Three heavy duty fabric tool holders with assorted Quick Change tools. Supplied with elasticated pockets, pencil, belt straps, hanging hole, hanging/carrying loop with hook & loop fastening.

See page 250.



#### **EXTRA LONG BITS**

Ohr Draduat Dat

#### **EXTRA LONG POZI® BITS** 150MM ₩

150mm long Pozi® Screwdriver bits in three sizes No.1, 2 and 3.

Bit Size	Product Ref.	Price
Pozi® No.1	SNAP/PZ/1A	£7.81
Pozi® No.2	SNAP/PZ/2A	£7.81
Pozi® No.3	SNAP/PZ/3A	£9.14

#### **EXTRA LONG TORX® BITS** 150MM 🗘

150mm long Torx® screw driver bits with round shafts. Can be used with T-Star® screws.

Bit Size	Machine Screw	Product Ref.	Price
Torx® T10	M3	SNAP/TX/10A	£9.14
Torx® T15	M3.5	SNAP/TX/15A	£9.14
Torx® T20	M4	SNAP/TX/20A	£9.14
Torx® T25	M5	SNAP/TX/25A	£9.14
Torx® T30	M6	SNAP/TX/30A	£9.14

#### **EXTRA LONG PHILLIPS®** BITS 150MM 😝

150mm long Phillips® screwdriver bits in three sizes No.1, 2 and 3.

Bit Size	Product Ref.	Price	
Phillips® No.1	SNAP/PH/1A	£7.81	
Phillips® No.2	SNAP/PH/2A	£7.81	
Phillips® No.3	SNAP/PH/3A	£7.81	

#### **EXTRA LONG SQUARE** DRIVE BITS O

Two lengths of No.2 (1/8") Robertson square drive bits. 75mm (3") and 150mm (6") for use with Pocket Hole Jig. See pages 204-205.

Bit Size	Length	Product Ref.	Price	
Robertson® No.2	3"	SNAP/SQ/2A	£6.36	
Robertson® No.2	6"	SNAP/SQ/2B	£7.67	





#### **TOOL HOLDER SETS**

- Heavy duty fabric tool holders with assorted Quick Change tools.
- Three sizes available with elasticated pockets to hold tools.
- All holders are supplied with a pencil and have a belt strap, hanging hole, hanging/carrying loop and are hook and loop fastening.
- Empty holders also available.



#### 30 PIECE SET

Selection of assorted Quick Change tools.

#### Contents:

- 1x Standard Quick Chuck
- 3x Drill 3mm, 5mm & 6mm
- 3x Pozi® No.1, 2, & 3 screwdriver bits
- 1x No. 8 Drill bit guide
- 1x Magnetic bit holder with retractable barrel
- 2x Flat bits 19mm & 25mmØ
- x Socket adapters 1/4" & 3/8" A/F
- 3x Nut drivers 6mm, 8mm & 10mm A/F
- 2x Drill countersinks 2.5mm & 3.5mmØ
- 12x Insert bits for magnetic holder (3 slotted, 3 Pozi®, 3 Phillips® & 3 hex keys)









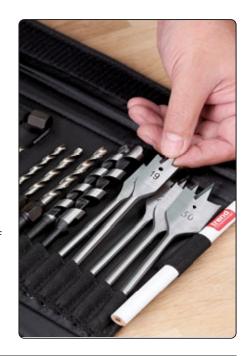
#### **60 PIECE SET**

Selection of assorted Quick Change tools. Suitable for a variety of drilling and screwing applications.

#### Contents:

- 1x Standard Quick Chuck
- 4x Masonry bits 5mm, 6mm, 7mm, 8mmØ
- 2x Drill bit guides No.6 & No.8
- 7x Drill 1mm, 2mm, 3mm, 4mm, 5mm, 6mm & 7mmØ
- 2x Auger bits 10 & 13mmØ
- 5x Flat bits 16mm,19mm, 22mm, 25mm & 30mmØ
- 3x Drill countersinks 2.5mm, 3.25mm & 3.5mmØ
- 1x Deburrer/countersink
- 1x Hole enlarger
- Square drive adapters 1/4", 3/8" & 1/2" A/F
- 3x 50mm Screwdriver bits Pozi® No.1, 2, & 3
- 4x Magnetic nut drivers 6mm, 8mm,10mm, & 12mm A/F
- 23x Insert bits for Magnetic bit holder (including 5 slotted 3 Pozi®, 3 Phillips®, 6 hex & 6 Torx®)
- 1x Magnetic bit holder with retractable barrel

**SNAP/TH2/SET** £106.04



#### **EMPTY HOLDERS**

Product Ref.	Supplied with Piece Set	Size mm	Screw Pouch	Qty of Belt Straps	Holds Qty of Tools up to 155mm OL	Holds Qty of Tools up to 80mm OL	Holds Qty of Insert Bits	Holds Qty of Quick Chucks	Price
SNAP/TH/1	30	140 x 165	1	1	10	7	12	1	£11.11
SNAP/TH/2	60	300 x 165	-	2	20	15	23	2	£13.91
SNAP/TH/A*	-	123 x 170	1	1	24(150mm)	-	8	1	£12.59
* See page 239.					, ,				



# GRAJIPRO

**QUICK RELEASE DRILL SYSTEM** 

QUICK RELEASE 1/4 INCH HEX SHANK FOR USE IN QUICK TOOL CHANGE DRILLS.



#### **5 PIECE DRILL COUNTERSINKS SET**

**Tool Steel Body With** High Speed Steel Drlll Bit

> Countersink ensures screw head is sub-flush and neat. For use in quick chuck drill tools. For timber, fibre-board and

> chipboard. Case hardened body for longer life. Adjustable drill bit to suit material thickness. Use in quick chucks and impact drivers.



mm	S/W	H/W	
2 (5/64")	-	4	
2.5 (3/32")	6	-	
2.75 (7/64")	8	6	
3.25 (1/8")	10	8	
3.5 (9/64")	12	10	

CR/QR/CS/SET £18.49

3 PIECE DRILL

**BIT GUIDE SET** 

lock face plates.

Accurate self centred pilot

hole drilling for hinges and

Accurate self centred pilot hole

drilling for hinges and lock face plates. Use on timbers and boards.

High Speed Steel (HSS) drlll bit

for longer life. Sprung loaded to

drill bit replacement. Use in quick

ensure drill bit retracts safely. Easily dismantled for cleaning and

chucks and impact drivers.

**Included Drill Bit Guides** 

Screw

No.

# tools. Suitable for a variety of

Case hardened drill countersinks for longer life.

Adjustable drill bit length countersinks to suit material thickness.

For use in quick chuck drill tools.

Flat bits for use for drilling locks.

Selection of screwdriver bits to suit various screw types and sizes found when working.

Supplied in heavy duty tool holder with belt loop for ease of storage and use.

#### Contents:

- 1x 60mm Quick change magnetic bit holder
- 1x 80mm Magnetic screw guide bit holder
- 3x Hex shank drill bits 3, 5 & 6mmØ
- 1x Drill bit guide No.8 (2.8mm)
- 2x Flat bits 19 & 25mmØ
- 2x Socket adapters 1/4" & 3/8" A/F
- 2x Drill countersinks 2.4 & 3.6mmØ
- 3x Pozi 50mm power bits (PZ1, 2 & 3)
- (3 slotted, 3 Pozi, ž Phillips & 2 hex)
- 1x 3mm Hex key

#### 30 PIECE QUICK RELEASE BIT SET Selection of assorted Quick Release

drilling and screwing operations.



- 3x Nut drivers 6, 8 & 10mm A/F
- 12x Insert bits for magnetic holder

#### CR/QR/SET/1 £36.00

#### 60 PIECE QUICK RELEASE BIT SET

Selection of assorted Quick Release tools. Suitable for a variety of drilling and screwing operations.





- 1x 60mm Quick change magnetic holder
- 1x Magnetic 80mm Screw guide bit holder
- 4x Masonry bits 5, 6, 7 & 8mmØ
- 1x Drill bit guide No.6 (2.4mm)

CR/QR/SET/2 £66.90



Drill Dia

mm

# **INSERT BITS**

Torsion zone giving excellent torque transmission.

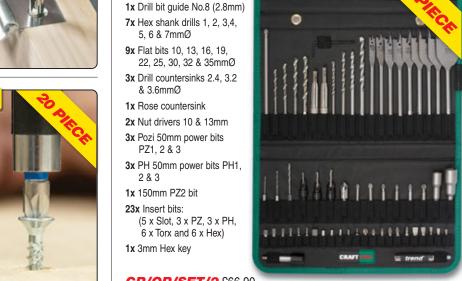


A pack of 25mm No.2 Pozi® insert bits. Forged bit for strength and longer life. with a round shaft to reduce breakage giving excellent torque transmission. Suit all types of screw applications in trade and industry. For use with insert bit holder.

*TORSION* ZONE

CR/QR/IPZ2/20 £5.10







# **DAMAGED SCREW** & BOLT REMOVERS

These versatile double-ended bits remove damaged screws, machine screws and broken bolts from wood, metal and plastic.

- Removes screws made of any alloy including soft brass.
- Removes free spinning screws.
- Winslow tip for self-centring. High speed steel.
- Double-ended (burnisher & tapered thread).
- Serrated extracting end of tool results in greater torque for hard to remove screws.
- Hex shoulder to aid removal of jammed screw or bolt.
- Not designed for hardened screws.

#### 2 PIECE SET

- Removes screw sizes from No.6 to No.14 (3.5mm to 5mm) and broken bolts from size M4 - M8 cleanly from wood, metal or plastic.
- Set of two bit sizes No.2 and No.3.

#### **GRAB/SE1/SET** £15.86

Size No.2 for No.6 to No.10 screws, bolt M5 to M6. Size No.3 for No.12 to No.14 screws, bolt M8.

# DAMAGED SCREW

DAMAGED SCREW





- Removes screw sizes from No.4 to No.24 and broken bolts from size M4 - M12 cleanly from wood, metal or plastic.
- Set of four bit sizes No.1, No.2, No.3 and No.4.

#### **GRAB/SE2/SET** £27.53

Size No.1 for No.4 to No.7, bolt 4.



Size No.2 for No.6 to No.10 screws, bolt M5 to M6. Size. No3 for No.12 to No.14 screws bolt M8. Size No.4 for No.16 to No.24, bolt M10 to M12.

#### 4 PIECE MICRO SET

- Removes screw sizes from No.5 to No.14 (3mm to 6mm) and broken bolts from size M3 - M6 cleanly from wood, metal or plastic.
- Set of four bit sizes No.1 micro, No.2 micro, No.3 micro and No.4 micro.

#### **GRAB/ME1/SET** £27.53

Size Micro No.1. Screws No.5 to No.6, bolt M3. Size Micro No.2 Screws No.3 Screw No.8, bolt M4. Size Micro No.3 Screw No.10, bolt M5. Size Micro No.4 Screws No.12 to No.14, bolt M6.







#### SAFETY INFORMATION & CUTTER CARE

Before use, to ensure safe working and to get the best from your Trend cutters, read the following safety instructions and cutter care. Please see www.trend-uk.com for further safety advice.



mm

1.5 - 24 ▶ 28,000 25 - 30 ▶ 24,000

31-50 ▶ 18,000

n.max

#### **POWER TOOL SAFETY**

- Ensure the power tool is in compliance with 
   2006/42/EC (identified by the CE marking
   on the power tool).
- Read and understand instructions supplied with power tool, attachment and cutter.
- Always remove the plug from the socket before making any adjustments to the machine.
- Disconnect power tool and attachment from power supply when not in use, before servicing, when making adjustments and when changing accessories such as cutters. Ensure switch is in "off" position and cutter has stopped rotating.
- Do not wear loose clothing. Make sure baggy sleeves are rolled up and ties are removed. Ensure long hair is tied back.
- Always trail the cable away from the working area.
- Always keep the area around the work piece and the floor clear of obstacles.
- The level of noise when routing may exceed 85 dB(A) and ear defenders should be worn.
- Always wear eye protection in the form of goggles, safety spectacles or a visor.
- Always wear a respirator or dust protection mask. Dust masks/filters should be changed regularly. Fit dust extraction.
- All Personal Protective Equipment (PPE) must meet current UK and EU legislation.
- Trial cuts should be made on waste material before starting any project.
- Always clamp securely the material being machined.
- Never leave the power tool unattended when it is running.
   Always wait until the spindle stops rotating
- before making any adjustments.
- Periodically check all nuts and bolts to make sure they are tight and secure.
- Always keep guards in place and in good working order.
- Only use cutting tools for woodworking that meet EN847-1/2 safety standards and any subsequent amendments.
- Hand held power tools produce different vibration levels. Always refer to the specifications and relevant Health and Safety Guide.

#### **ROUTING SAFETY**

- Disconnect machine from power source before carrying out any adjustments.
- Before each use check that the cutting tool is sharp and free from damage. Do not use the cutting tool if it is dull, broken or cracked or if any other damage is noticeable or suspected.
- Keep hands, hair and clothing clear of the cutter.
- Clamping surfaces shall be cleaned to remove dirt, grease, oil and water.
- Tool's shank must be inserted into the router's collet at least all the way to the marked point.
- Tools and tools bodies shall be clamped in such a way that they shall not become loose during operation.
- Care shall be taken when mounting tools to ensure that the clamping is by the shank of the tool and that the cutting edges are not in contact with each other or with the clamping elements.
- Fastening screws and nuts shall be tightened using the appropriate spanners etc., and to the torque value provided by the manufacturer.

- Extension of the spanner or tightening using hammer blows shall not be permitted.
- Clamping screws shall be tightened according to instructions provided by the manufacturer. Where instructions are not provided, clamping screws shall be tightened in sequence from the centre outwards.
- Cutting tools are sharp. Care should be taken when handling them.
- Check that the cutter is fitted securely in the router collet.
- Always remove spanners and hex keys from the cutter.
- Check before starting to cut, that there are no obstructions in the path of the router. When cutting through the full thickness of the material, ensure there are no obstacles beneath the work piece.
- The direction of routing must always be opposite to the cutters direction of rotation. Do not back-cut or climb-cut.
- Do not switch on the router with the cutter in contact with the work piece and do not feed the cutter into the work piece until it is at full speed.
- Always guide the router with both hands.
- When you are finished routing, release the plunge and allow the machine to come to a complete stop.
- Ensure the shank size is compatible with the collet.
- Ensure the cutter can be used safely with the chosen router before use.
- When using stacked tooling (multiblade, block, groover etc.) on a spindle arbor, ensure that the cutting edges are staggered to each other to reduce the cutting impact.
- Feed the router at a constant speed. Too slow a feed speed will result in burning the material and overheating the cutter.
- Never use cutters with a diameter exceeding the maximum diameter indicated in the technical data of the power tool or attachment used.
- Do not take heavy and deep cuts in one pass as this will overload the router.
- The motor of a router is susceptible to the accumulation of sawdust and wood chips and should be blown out, or 'vacuumed', frequently to prevent interference with normal motor ventilation.
- In case of excessive vibrations while using the router stop immediately the operation and have the eccentricity of the router cutter and clamping system checked by competent personnel.

#### MAXIMUM SPEED (N.MAX)

 The maximum speed marked on the tool, or shown in the chart or on the packaging should not be exceeded. Where stated, the speed range should be adhered to. Recommended speeds are shown in our Routing Catalogue, in our instructions and/or on our website.

#### USING ROUTERS IN A FIXED POSITION

- After work, release the router plunge to protect the cutter.
- Always use a push-stick or push-block for last 300mm of the cut.
- Whenever possible use a work holding device or jig to secure component being machined.
- Ensure attachment is securely fitted to the workbench, with table surface at approximately hip height.

- Use a No-Volt Release Switch. Ensure it is fixed securely, easily accessible and is used correctly.
- Do not use awkward or uncomfortable hand positions.
- The use of a fine height adjuster is highly recommended (if available for your router) for accurately adjusting the height of the cutter for operations such as dovetailing, or in a fixed head use.
- Do not reach underneath the table or put your hands or fingers at any time in the cutting path while tool is connected to a

#### **CUTTER CARE**

- Always read the instructions supplied with the cutter.
- Do not drop cutters or knock them against hard objects.
- Cutter shanks should be inserted into the collet all the way to the marked point. Do not insert shank too far into the collet. Leave about 3mm of shank showing.
- Do not over-tighten the collet nut as this will score the shank and create a weakness. If the shank is marked please discard the cutter.
- Periodically check the router collet and collet nut for wear. A worn distorted collet should be discarded.
- Cutters should be kept sharp to avoid burning and to maintain a good finish on the work piece. Do not use blunt cutters.
- Cutters should be kept clean. Resin build-up should be removed at regular intervals with Resin Cleaner. The use of a lubricant such as Trendicote PTFE spray will help prevent resin build-up.
- Do not take deep cuts in one pass, take several shallow passes to reduce the side load applied to the cutter.
- Very small diameter cutters should be handled and used with care.
- Always return the cutter to its packaging after use
- Always use router cutters in a router. Router cutters must not be used in a drill. Drill and boring bits must not be used in a router. Router cutters must only be used for the material cutting application for which they are designed. Do not use on metal or masonry.

#### REPAIR OF TOOLS/ MAINTENANCE

- Repair of tools is only allowed in accordance with the manufacturers instructions.
- The design of composite (tipped) tools shall not be changed in the process of repair. Composite tools shall be repaired by a competent person, i.e. a person of training and experience, who has knowledge of the design requirements and understands the levels of safety to be achieved.
- Repair shall therefore include e.g. the use of spare parts which are in accordance with the specification of the original parts provided by the manufacturer.
- Tolerances which ensure correct clamping shall be maintained.
- Care shall be taken that regrinding of the cutting edge will not cause weakening of the body and the connection of the cutting edge to the body.

#### WARRANTY

If your Trend product becomes defective due to faulty materials or workmanship within 12 months of purchase, we guarantee to replace all defective parts free of charge, or at our discretion, replace the unit free of charge provided that: Proof of date of purchase is provided. The product has not been misused, abused or improperly maintained and has been used in accordance with the instructions. No unauthorised repair or modification has been made to the product. Service and/ or repair of power tools and machinery is carried out by an authorised Trend Service Agent. The product was not stolen or is a counterfeit copy.

Please note: This guarantee is personal to the original purchaser and is not transferable. The guarantee is in addition to and does not affect contractual rights as a professional user or your statutory rights as a private non-professional user. Customers must ensure that the product is suitable for the purpose intended before use. Trend cannot be held liable for any product. We also cannot be held liable for material rendered unusable or any form of consequential loss.

#### MPORTAN

The information in this catalogue is for general guidance purposes only. You are responsible for determining whether it applies to your particular application. Before using our products users must read and understand all safety legislation and refer to the Provision and Use of Work Equipment Regulations (PUWER). Before using our products please read and understand all instructions provided and also refer to our Safety section in this catalogue on page 119. Trend accessories must not be put into service until it has been established that the power tool being used is in compliance with 2006/42/EC (identified by the CE marking).

#### IVIRONMENTAL

We are committed to reducing the impact of our products to the environment through design and process. The re-use of recycled materials reduces the demand for raw materials and helps prevent environmental pollution. Packaging and used products should be sorted for environmentally friendly recycling. We comply with all applicable laws and regulations and strive to minimise waste generation, re-use and recycle materials where possible.

Please see our website for more information and also www.recycle-more.co.uk

ELECTRICAL EQUIPMENT REGULATION

Recycle raw materials instead of disposing as waste.

Accessories and packaging should be sorted for environmental-friendly recycling.

Separate collection. This product must

not be disposed of with normal household waste.

Household User



Local regulations may provide for separate collection of electrical products from the household, at municipal waste

sites or by retailer when you purchase a new product. Please call Trend Customer Services for advice as to how to dispose of unwanted Trend electrical products in an environmentally safe way or visit www.trend-uk.com

#### Business User

Please call Trend Customer Services for disposal of unwanted Trend electrical products

Producer No: WEE/DC0043SY/PRO

#### COPYRIGH<sup>\*</sup>

© 2020 Trend Machinery & Cutting Tools Ltd. All rights reserved. No part of this publication may be reproduced or transmitted without prior permission. Trend reserves the right to revise product specifications at any time without notice. Colours may vary.

E&OE. ® All Trademarks Acknowledged. Trend logo, Trend Snappy logo, CRAFTPRO, are registered trademarks of Trend Machinery & Cutting Tools.



Router cutters can be made to a customer's specific requirements. Please provide exact dimensions or a wood profile, shank size, material grade (e.g. TCT or PCD), flute form, number of tips, rotation and material to be cut to enable us to provide a quotation. Please contact Trend Technical Support for further information.



# PRODUCT REFERENCE INDEX

PRODUCT REF.	PAGE	PRODUCT REF.	PAGE	PRODUCT REF.	PAGE	PRODUCT REF.	PAGE	PRODUCT REF.	PAGE
2/All refs	12	<b>21</b> / All refs	53	46/80 - 46/92	22	501/ All refs	205	BB41 - BB318	106
<b>3</b> /0 - 3/07		22/01 - 22/03		46/93	34	620/ All refs		BEAM All refs	182
3/08		22/08 -22/1	53	46/94 - 46/96		755		BN All refs	
3/1 - 3/6		23/09 - 23/11		46/97 - 46/99		865 - 876		BOOK/CR	
3/7 - 3/9		23/12		46/100 & 46/101	22	1004/ All refs	206	BR/143 - BR/444	76
3/10 - 3/13		24/1	206	46/103 - 46/107	31	1306/ All refs		BR/KFP/1	11
3/20X1/4HSS		24/10 - 24/80		46/115 - 46/160	34	1307/ All refs		BS/JIG	167
3/20		26/ All refs		46/200 - 46/212	20	2214/ All refs	205	BSC/All refs	163
3/20LX1/4HSS		27/ All refs		46/230 - 46/250		6200/ All refs		BSJ/PIN/4	
3/20LX1/4TC		28/ All refs		46/260 - 46/283		06748		BW All refs	
3/22 - 3/54		<b>30</b> / All refs		46/290		323421		C/CHISEL	
3/55L		31/02 - 31/25	32	46/300 & 46/301		2608570108		C001 - C016D	
3/60 - 3/62		31/30 -31/34		46/360 - 46/380		ABSS All refs		C016S	
3/71 - 3/83D		31/50		46/390		ACR All refs		C017 - C021A	
3/83M		32/ All refs		46/401		AIR/M All refs		C021S	
3/84L		33/1 - 33/22		46/501		AIR/P/ All refs		C022 - C033Y	
				46/521		AIR/PRO		C034 - C039	
3/85 - 3/86C		33/30 33/60		46/900 - 46/903		AIR/PRO/M		C040 & C040A	
4/0 - 4/5				47/2		AK/ All refs		C041 & C042	
4/5L		34/03 - 34/7		47/4		ALU All refs		C043 - C045C	
4/6 - 4/22		34/8	58	47/7		ANGLEFIX		C046 - C048	
4/23L		34/9 - 34/17		47/40 - 47/50S					
4/24 - 4/96		34/20				AP/ All refs		C049	
5/ All refs		34/22		49/50		AQ All refs		C049A	
6/ All refs		34/33		49/70 & 49/71		AR/JIG		C050 - C066	
<b>7</b> /01 - 7/10		34/40		<b>50</b> /03 - 50/27		B10F - B13F		C067 - C070E	
7/50		34/41		50/31 - 50/39		B14		C071 - C073	
7/66		34/50 & 34/51		50/50 - 50/52		B14A & B14A		C073A	
7/96 & 7/97	64	34/55 & 34/56		53/ All refs		B15 & B16		C074 - C077	
7E/ All refs	35	34/60 & 34/61	62	55/08 & 55/09		B16/10 - B20		C077A	
8/ All refs	40	34/110	59	55/1		B21		C078 - C079E	
9/2 - 9/19	38	34/200 & 34/220	56	56/ All refs		B21A & B22		C086 - C091	
9/41	29	35/ All refs	57	59/ All refs	25	B22A		C094 & C095	84
9/70 - 9/78	39	36/ All refs	27	61/ All refs	63	B22C	106	C096 - C105	89
9/80		37/1		62/ All refs	63	B23		C106	
9/85		37/12		64/ All refs	63	B23A	26	C107 - C111	88
9/87 - 9/98		39/ All refs	59	<b>84</b> /09 - 84/49	39	B23C	96	C112	85
9A/1		<b>40</b> /13 - 40/16		84/83 - 84/96	43	B24	58	C115 - C117C	78
<b>10</b> /1 - 10/12		40/32		86/05	40	B24C	96	C119 - C119B	79
10/22 & 10/23		45/ All refs		87/01	28	B25	58	C120 - C120A	95
10/25		46/01 - 46/03		88/01		B25A		C121 - C121P	77
10/30 - 10/99		46/05		90/4	42	B25G	22	C122	
10H/1		46/06		90/10 & 90/11		B26	59	C123	77
11/1 - 11/5		46/07		90/12 - 90/14		B26E		C124 & C125	
11/17		46/09	20	90/22		B27 & B28		C126 - C128	
11/20 - 11/41		46/010	10	90/25 - 90/31		B28C		C130	87
11/50		46/090		92/1 & 92/3		B29		C131	
11/60		46/2		92/11		B29C		C133 & C134	
		46/3 - 46/7		92/20		B30 - B35		C135 & C135A	
12/ All refs				90/27		B35C - B35GRS		C138 & C139	
13/1 - 13/30		46/7/50 & 46/8/50		92/28		B36 - B38		C140	
13/40 - 13/50		46/9/50 & 46/9/60		93/1 & 93/3		B38G		C140	
13/60		46/10						1	
14/ All refs		46/11 - 46/18		93/10		B39 - B43		C142	
15/All refs		46/19		104/ All refs		B48J - B78D		C143 - C148	
16/ All refs	53	46/20 - 46/23		105/ All refs		B95		C149	
18/1 - 18/18		46/29 & 46/30		331		B95A - B182		C150	
18/19 - 18/20	51	46/34 - 46/38		332 & 333		B210 & B250		C152	
18/21		46/39 & 46/39L		334		B254 - B254G		C153	
18/23 & 18/24	51	46/41	35	337		B260 - B300		C153/3	
18/50 - 18/56		46/42		338 - 342	55	B300A		C153D & C153M	73
18/80		46/44		343 & 344	61	BAT/CR2032/3V	195	C153S	
18/81 - 18/84		46/47 & 46/49		345 - 348	62	BB16		C154	81
18/90		46/56 - 46/58		349	205	BB18 - BB22		C155 - C157	
19/2		46/61 - 46/67		356		BB22RS		C158	
19/61 & 19/62		46/68 - 46/75		421/ All refs		BB24 - BB34		C159 - C161A	
13/01 X 13/02	52	+0/00 - 40//3	4/						

# PRODUCT REFERENCE INDEX

PAGE

\_175

#### **CONVERSION CHART**

PRODUCT REF.	PAGE	PRODUCT REF
C162 & C162A		CIRC All refs
C163		CJ/ all refs
C164 & C164A		CLEAN/500
C165		CLT/NUT/T10
C165A	78	CLT/SLV All refs
C165B - C166B	77	CLT/T3/3
C167 & C168	78	CLT/T4 All refs
C169 & C170	91	CLT/T10 All refs_
C170A		CM/ All refs
C171 - C172M		CNC/LITE/FS
C173	91	CNC/LITE/HF
C174 - C177		CNC/LITE/T10
C178 & C179		CNC/MINI/1
C180	82	CNC/MINI/2
C183 & C183A		CNC/PLUS/T10_
C183B		CNC/ROT/1
C184		CNC/SMART130
C184A - C187		CNC/SMARTFAS
C188 & C189		CNC/SMARTPLU CNC/VAC All refs
C190 & C191 C192		CNC/VAC All Tels
C192		CNC/YETI All refs
C193 & C193A		CNCM/ All refs _
C195 & C196		CNS/T5
C197		COLL All refs
C198		COMBI1002
	77	CR/BJB All refs_
C200 & C200D		CR/DWS All refs
C201 & C203		CR/H All refs
C204		CR/ KFP All refs
C205	78	CR/PB All refs
C206 - C209		CR/PDS All refs_
C210 - C213A		CR/QR All refs
C214 - C214B	77	CR/SSP All refs_
C215 & C216		CRB All refs
C217 & C217A		CRT/ All refs
	85	CSB/8520 - CSB/
C219		CSB/12024T & CSB/12040T
C220 & C221		CSB/13024 &
C222		CSB/13424
C223		CSB/13612TA -
C224 - C225C C226		CSB/13624TA
C230 & C231		CSB/14024 -
C235 - C237		CSB/15024
C240 - C250		CSB/15024TB - CSB/160/3PK/A_
C255 & C256		CSB/16024 -
C260		CSB/16024A
C265 - C273		CSB/16024T
C281 & C282		CSB/16028A -
C290	78	CSB/16248
C300 & C301	98	CSB/165/3PK/A - CSB/165/3PK/C
C305	79	CSB/16518 -
CASE/1001		CSB/16524
CASE/DAR/200		CSB/16524T -
CASE/DG		CSB/16542TD
CASE/HJ		CSB/16548 - CSB/16548B
CASE/HJ/A		CSB/16548B
CASE/HJ/C		CSB/165481C - CSB/16552T
CB/KIT		CSB/16560 -
CB12 - CB58		CSB/18424A
CC/ All refs CDJ All refs		CSB/18424T -
CE/ All refs		CSB/18424TA
<u> </u>		CSB/18430

RODUCT REF.	PAGE	PRODUCT REF.	PAGE
RC All refs		CSB/18430A -	
J/ all refs		CSB/18440B	115
_EAN/500		CSB/18448TA	116
_T/NUT/T10		CSB/18458 -	115
		CSB/18548 CSB/190/3PK	
_T/T3/3		CSB/190/3FR	110
_T/T4 All refs		CSB/19024A	115
_T/T10 All refs		CSB/19024TB -	
M/ All refs		CSB/19024TC	
NC/LITE/FS NC/LITE/HF		CSB/19024TW	
NC/LITE/T10		CSB/19036TC CSB/19036TW -	116
NC/MINI/1		CSB/19040A	115
NC/MINI/2		CSB/19040TB	
NC/PLUS/T10		CSB/19060	
NC/ROT/1	144	CSB/19060TC	116
NC/SMART1300		CSB/20040 -	
NC/SMARTFAST		CSB/21024	115
NC/SMARTPLUS		CSB/21024TC CSB/21036	
NC/VAC All refs		CSB/21036TC	
NC/VCARVE All refs_ NC/YETI All refs		CSB/21048	
NC/ FETT All refs		CSB/21060TC	
NS/T5		CSB/21072 -	
OLL All refs		CSB/23540	
OMBI1002		CSB/250/3PK	116
R/BJB All refs		CSB/25024 - CSB/35064	115
R/DWS All refs	223	CSB/AP All refs	
R/H All refs		CSB/BW All refs	
R/ KFP All refs		CSB/CC All refs	
R/PB All refs		CSB/PT All refs	
R/PDS All refs		CTI/ All refs	189
R/QR All refs R/SSP All refs		CURV All refs	
RB All refs		D/ All refs	
RT/ All refs		DAF/8	
SB/8520 - CSB/11524		DAR/ All refs DC/ All refs	
SB/12024T &		DG/JIG	
SB/12040T	116	DG/PRO	
SB/13024 & SB/13424	115	DGP/IP All refs	
SB/13612TA -	113	DLB	
SB/13624TA	116	DOM All refs	
SB/14024 -		DS/TAPE/A	
SB/15024	115	DWL All refs	
SB/15024TB - SB/160/3PK/A	116	DWS/CB/A	
SB/16024 -		DWS/CC All refs	
SB/16024A	115	DWS/CP8 All refs	
SB/16024T	116	DWS/CS/FF DWS/DS10/F	
SB/16028A -	445	DWS/HG/SET	
SB/16248 SB/165/3PK/A -	115	DWS/HP All refs	
SB/165/3PK/C	116	DWS/KIT All refs	
SB/16518 -		DWS/LF All ref	
SB/16524	115	DWS/MF/FC	218
SB/16524T -	110	DWS/MP/40	219
SB/16542TD SB/16548 -	110	DWS/NFPK/F	
SB/16548B	115	DWS/P5/FC	
SB/16548TC -		DWS/PFR/F	
SB/16552T	116	DWS/PP5 All refs	
SB/16560 -	115	DWS/TF All refs	
SB/18424A SB/18424T -	115	DWS/W6/FC E/SB/10	
SB/18424TA	116	E/SCRIBE	
	115	ECL / All rofo	175

\_ 115

ECL/ All refs \_

PRODUCT REF.	PAGE
ELLIPSEJ All refs	183
F41 All refs	
FC/ All refs	
FFS/120	198
FHA/ All refs	193
FIX/KIT All refs	
FSB/FS120	198
FT/ All refs	112
FTS/CASE	220
FTS/CEG	220
FTS/DP/SFF	220
FTS/KIT/MK2	
FTS/KIT/MK2B	221
FTS/KS	221
FTS/MS	221
FTS/S/ All refs	220
FTS/TS All refs	221
GAUGE/1 &	
GAUGE/D60	
GB/03 -GB/03	
GB/5 All refs	
GB/A	
GB/COLL All refs	
GB/PLATE All refs	
GB/T4/160	170
GB/T10/30	
GB/US/ All refs	
GB10 - GB12	
GB13/P/A	
GB14 - GB793	
GP/ All refs	
GRAB All refs	
H/JIG/A	
H/JIG/B	
H/JIG/C	
H75 - H250	
HINGE/JIG	
HJ/1	
HM All refs	
HOSE All refs	
HR All refs	166
NLAY/KIT/A	
INS All refs	
IT/ All refs	
JB/ All refs	
KB All refs	
KFP All refs	
KWJ/PIN/4	
KWJ650	
KWJ700	
KWJ700S	
KWJ900	
L80 - L140	
LB/JIG	
LOC/BLK/PK1	
LOCK/JIG	1/4
LOCK/JIG/A	
LOCK/JIG/B	
M/CFT01	
M/KWS01	
M/P2P01	
M/PB01	
MAG All refs	
MB All refs	54

Inches	mm
1/64	0.5
3/64	1 1.5
5/64 3/32 ——	2
7/64	—— 2.5 ——— 3
9/64 5/32 ——	—— 3.5 ——— 4
3/16 ——	—— 4.5 ——— 5
7/32 <u>13/64</u>	5 5.5
1/4	——— 6 —— 6.5
9/32	<del></del> 7
5/16 <del></del>	7.5 8
11/32 ———	—— 8.5 ——— 9
3/8 — 25/64	—— 9.5 ——— 10
13/32 ——	10.5
7/16 <del></del>	<b>11</b> 11.5
15/32 <del></del>	12
1/2 33/64	—— 12.5 ——— <b>13</b>
17/32 ——— 35/64	13.5 <b>14</b>
9/16	—— 14.5 ——— <b>15</b>
19/32 ——— 39/64	15.5
5/8 41/64 21/32	16 <sub>16.5</sub> 17
43/64	
45/64 23/32 ——	—— 17.5 ——— <b>18</b>
3/4 47/64	—— 18.5 ——— <b>19</b>
49/64	—— 19.5 ——— <b>20</b>
51/64	20.5
53/64 27/32 ——	21 21.5
7/8	22
29/32	22.5 23
15/16 59/64	—— 23.5 ——— <b>24</b>
31/32 <del></del>	—— 24.5 ——— <b>25</b>
1	25.5
1/32	26 26.5
1/16 5/64	27
3/32	—— 27.5 ——— <b>28</b>
11/8	28.5 <b>29</b>
5/32 ——— 11/64	29.5 <b>30</b>
3/16	<del></del> 30.5
7/32 —— 15/64	——— 31 —— 31.5
17/64	32 32.5
9/32 ——— 19/64 5/16 ———	33
21/64 11/32 —	33.5 34
13/8 -23/64	—— 34.5 ——— <b>35</b>
25/64 13/32 ——	—— 35.5 ——— <b>3</b> 6
27/64 7/16 ——	<del></del> 36.5
29/64 15/32 ——	——— 37 —— 37.5
11/2	38
33/64 17/32 —— 35/64	—— 38.5 ——— <b>39</b>
33/04	39.5 - •

# PRODUCT REFERENCE INDEX

PRODUCT REF.	PAGE	PRODUCT REF.	PAGE	PRODUCT REF.	PAGE	PRODUCT REF.	PAGE	PRODUCT REF.	PAGE
	400								0 000
ME/JIG		ROD/10		SNAP/DB18/10 - SNAP/DB964/10	238	SS/ All refs		VJS/CG/24 - VJS/CG/5	
MFT/ All refs		RP/ All refs		SNAP/DB/PK1		SSP/ All refs		VJS/CG/BBC	
MITRE All refs MS/C/100B9 -	192	RS/ All refs		SNAP/DBG All refs		STAIR/ASTAIR/B		VJS/CG/ESB	
MS/C/200TD	231	RT/06 RT/3.0 - RT/4.0		SNAP/DD/ All refs_		1		VJS/CG/EXT VJS/CG/FB	
MS/C/CART		RT/10 - RT/13		SNAP/DG/ All refs		STE/LP All refs STE/VIS/ML		VJS/CG/PRO8	
MS/C/ORG		RT/21 - RT/33		SNAP/DRV/SET		STEALTH/ All refs		VJS/CG/RBP	
MS/C/PLAT				SNAP/DS/ All refs		T4EK		VJS/CG/SBP	
MS/C/SET All refs		RT/39		SNAP/DSB/6				VJS/CG/SQA	
MS/P/200P - MS/P/450_		RT/65		SNAP/DWIPH2/2		T4ELK			
MS/P/CART		RT/70 - RT/75		SNAP/F/ All refs		T5EB		VJS/CG/WJK	
MS/P/ORG All refs		RT/80 -RT/81		SNAP/FAB1/SET		T5ELB		VJS/CK	
MS/P/PLAT		RT/100 - RT/260		SNAP/FB/ All refs		T7EK		VJS/CK/L	
MS/P/RACK All refs		RT/323		SNAP/FB1/SET		T10EK		VJS/FJK	
MS/P/SET All refs		RT/331X1/4TC		SNAP/FLIP/SET		T10ELK		VJS/G/35	
MS/P/TB All refs		RT/391X1/4TC		SNAP/FMD/1		T11/JT/KIT		VJS/G/100	
MS/PRO		RT/FENCE/A		SNAP/FS/ All refs		T11/VJS/CGKIT		VJS/G/CB	
MS/WTBR		RT/KEY All refs		SNAP/FS1/SET		T11EK		VJS/PCK/L	
MT/DUSTKIT		RT/M All refs		SNAP/GD All refs		T11ELK		VJS/TG/JIG	
MT/JIG		RTI/ All refs		SNAP/HAND/1		T31/ All refs		WINBAG All refs	
MT/JIG/EURO		RTS/1000		SNAP/HD/SET		T31A		WP-AKT/01	
N/COMPASS/AEX		RUST/60		SNAP/HD1/SET		T32		WP-BH All refs	
NS/MAT All refs		<b>S</b> 2/6 - S3/81		SNAP/HEX All refs		T32/ All refs		WP-CRTMK3/38	
NVRS All refs		S11 All refs		SNAP/HKLC/6		T32L		WP-E/SB01	
OB/ All refs		S31/11		SNAP/IP All refs		T35/ All refs		WP-FC/ All refs	
OFS/BASE		S47/4		SNAP/ISB/A		T35A		WP-HJ/02 - WP-HJ/09	
PB/ All refs		S47/70 - S47/72		SNAP/MAG		T35AL		WP-HJ/09B	
PC/ All refs		S48/ All refs		SNAP/MB All refs		T46/ All refs		WP-HJ/10	
PCD/10 - PCD/40		S49/ All refs		SNAP/MD All refs		T420/ All refs		WP-LOCK/A All refs	
PCD/FSB		S55/02 - S55/06				T421/ All refs		WP-LOCK/T All refs	
		S55/08		SNAP/MSH All refs _		TB/ All refs		WP-MT/01A	
PCD/GEM01X1/2 PCD/SB/1608		S55/2 - S55/6		SNAP/MTD1/SET SNAP/ND/ All refs		TCH/AT/B75R		WP-RBT/CUT/A	
PENCIL/CR/3		S55/10 - S55/22		SNAP/OFLD		TCH/HA/H10		WP-SNAP/D/4C	
PH/6 All refs		S57/01		SNAP/PC All refs		TCH/HP/H20		WP-SNAP/D/4MS	
PH/7 All refs		S58/ All refs		SNAP/PH/ All refs		TCH/PE/B22		WP-SNAP/D/5L	
PH/8 All refs		S59/ All refs		SNAP/PH2I/3		TCH/PO/G12R		WP-SNAP/D/5MS	
PH/CLAMP All refs		S60/ All refs		SNAP/PHD/95		TEMP/BH/A		WP-SNAP/D/5R	
PH/COLL/95		S64/01				TEMP/CDH/A		WP-SNAP/D/5S	
		S64/2		SNAP/PZ2I/3		TEMP/COR/A		WP-SNAP/D/6MS	
PH/DRILL All refs		S64/30				TEMP/CTI/A		WP-SNAP/D/7L	
PH/JIG		S66/ All refs		SNAP/QC All refs		TEMP/IN/ All refs		WP-SNAP/D/9L	
PH/JIG/AK		SAFE/ All refs		SNAP/ROT/DS		TEMP/LB/A		WP-SNAP/D/11L	
PH/JIG/BK PH/JIG/BS		SET/MT All refs		SNAP/RTA All refs		TEMP/LN57X1/4		WP-SNAP/D/18	
PH/JIG/M		SET/SS8	99	SNAP/SA All refs SNAP/SB2/SET		TEMP/LR/A		WP-SNAP/D/18S	
		SET/SS9		SNAP/SB2/SET -	240	TEMP/LUC/57		WP-SNAP/D/332	
PH/PC/95 PH/SCW/PK1		SET/SS11		SNAP/SB5/SET	247	TEMP/NUC/57		WP-SNAP/D/35R	
		SET/SS24X1/4TC		SNAP/SD All refs		TEMP/PD/R All refs_		WP-SNAP/D/47C	
PJ/ All refs		SET/SS31X1/4TC		SNAP/SQ All refs		TEMP/SS/A		WP-SNAP/D/63C	
PLUG/110V/32A		SET/SS35X1/2TC		SNAP/SR All refs		TEMP/SSD/5MM		WP-SNAP/D/564	
PP150	211	SET/SS50X1/4TC		SNAP/SS/5MM		TEMP/TRKX1/4		WP-SNAP/D/764	
PRESSURE/1		SHIM All refs		SNAP/TAP All refs_		TM/IP/B/10		WP-SNAP/D/764S	
PRT & PRT/L		SL/ All refs	58	SNAP/TD/ All refs		TR09X1/4TC		WP-SNAP/D/964	
PSC/2 - PSC/50		SM All refs		SNAP/TH All refs		TR12X1/4TC	170	WP-SNAP/D/964S	
PSC/101 - PSC/107		SNAP/AB All refs		SNAP/TX All refs		TR17DX1/2TC		WP-SNAP/DT All refs _	
PT/ All refs		SNAP/ASA All refs	246	SNAP/WS1/SET		TR37X1/2TC		WP-SNAP/GSW/1	
PTN/ All refs		SNAP/BH/11 -	0.40	SNAP/WTD1/SET		TR/ All refs		WP-SNAP/SPR All refs	
PUSHSTICK/1		SNAP/BH/OT/A		SOCK/110V/32A		TRENDICOTE		WP-T4/087	
QUAD		SNAP/BH/SB4		SP-349 All refs		TRENDIWAX		WP-T5/046	
R/COMPASS/A		SNAP/BH/SDS		SP-46/ All refs		TSQ		WP-T5/077	
R/POD/A		SNAP/CB All refs		SP-46/ All reis SP-A - SP-Q		UNI/CS	204	WP-T10/087	
R/STAND/A		SNAP/COL/PK1				UNI/GB16	190	WP-T11/087	
RB/A - RB/T/10		SNAP/CS All refs		SP-QUAD All refs		UNI/PIN All refs		WP-VJS All refs	
	156	SNAP/D/ All refs	237	SP-R - SP-Y		UNIBASE	190	WP-WRT/38	192
RBT/ All refs				CDACIOIEO					
RBT/ All refs RESIN All refs ROD/8 All refs	234	SNAP/DB5L/5 - SNAP/DB11L/5		SPAC/8/53SPACER/ All refs		VARIJIG		WRT All refs	138

# PRODUCT FINDER INDEX

A	
ABS CuttersAcrylic Cutters	68
Acrylic Cutters	68-69
Adjustable Machine Bits Air Mask Pro Air Pro Max	205
Air Nask Pro	134
Air Pro Max	132
Air Stealth	130
Air Stealth Lite Pro	137
Air Stealth Vis	135
Airshield Pro	133
Alucobond® Cutters	66
Aluminum Cutters	6/, /0-/1
Angle DriversAngle Guide (Varijig)	246
Angle Guide (Varijig)	186
Anglefix	214
Aperture Radius Jig	165
Aquamac Style Cutters	60,97
Arbors	58-59
Auger Bits	241-242
Ball Groovers	57
Ball GrooversBead & Read Cutters	38-40 87
Poom Trammala	30-40, 07
Beam Trammels Bearings for Cutters	106 107
Belfast Sink Jig	167
Denah Dag for MET ton	167
Bench Dog - for MFT top Bevel Cutters	187
Bevel Cuπers	30-31, 94-95
Bevel Trimmers	23-24, 79
Birdsmouth Cutters	29
Biscuit JointingBiscuits & Biscuit Blades	55, 94
Biscuits & Biscuit Blades	196
Bit Holders	246-247
Book	198
Boring Tools Brookman™ Cutters	205, 207
Brookman™ Cutters	33
BurrsBushing Washers	66
Bushing Washers	113, 117
Butt Hinge Template	179
Butt Hinge Template Butterfly Spline Cutter	29
Cabinet Door Hinge Template	
Cable Tidy Income	109
Cable Tidy Inserts	189
Capillary Groove Cutters	43
Caravan Industry Tooling	25
Cavetto Cutters	
0 0	83
Centrotec Compatible Tools	83 236, 245
Centrotec Compatible Tools Chamfer & 'V' Groove	236, 245 30-31, 80-81
Centrotec Compatible Tools Chamfer & 'V' Groove Clamping Systems	200-211
Centrotec Compatible Tools Chamfer & 'V' Groove Clamping Systems	200-211
Centrotec Compatible Tools Chamfer & 'V' Groove Clamping Systems Classic Décor Classic Ogee	47 46-47, 88-89
Centrotec Compatible Tools	47 46-47, 88-89 47, 88
Centrotec Compatible Tools	47, 88-89 47, 47, 88 47, 88
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 149 145
Centrotec Compatible Tools	47, 46-47, 88-89 47, 88 149 145 142-144
Centrotec Compatible Tools	46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150
Centrotec Compatible Tools	46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147
Centrotec Compatible Tools	46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145 142-144 146-150 146-147 193
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145 142-144 146-150 146-147 193
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88-9 149 145 142-144 146-150 146-147 193 197 5 247
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88-9 149 145 142-144 146-150 146-147 193 197 5 247
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145-144 146-150 146-147 193 197 5 247 28 159
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145-144 146-150 146-147 193 197 5 247 28 159
Centrotec Compatible Tools	47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 \$
Centrotec Compatible Tools	47, 88-89 47, 88 47, 88 47, 88 149 145 1445-144 146-150 146-147 193 297 28 159 181 230-231
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 4149 145 142-144 146-150 146-147 28 159 159 181 230-231 182 66, 98
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88-89 149 145 142-144 146-150 146-147 193 197 \$ 247 28 159 181 230-231 182 66, 98 64-65
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88-89 47, 88-89 149 145 142-144 146-150 146-147 193 197 \$ 247 28 159 181 230-231 182 66, 98 64-65 39, 87
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145 142-144 146-150 146-147 193 197 \$ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145 142-144 146-150 146-147 193 197 \$ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 \$ 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 4149 145 1442-144 146-150 146-147 193 197 \$
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88-89 47, 88-89 48-142-144 146-150 146-147 193 197 8287 159 18130-23118266, 9864-6539, 87173, 17741 63, 205, 239 205, 238, 25145, 83
Centrotec Compatible Tools	
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88 149 145 142-144 146-150 146-147 193 197 \$ 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239 205, 238, 251 45, 83 72-98
Centrotec Compatible Tools	
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 s _ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239 205, 238, 251 45, 83 72-98 251 140 114-117
Centrotec Compatible Tools	
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 s _ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239 205, 238, 251 45, 83 72-98 140 114-117 99-105
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 s _ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239 205, 238, 251 45, 83 72-98 140 114-117 99-105
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 s
Centrotec Compatible Tools	
Centrotec Compatible Tools	47, 88-89 47, 88-89 47, 88-89 47, 88-89 47, 88-89 48-142-144 146-150 146-147 193 197 8
Centrotec Compatible Tools	
Centrotec Compatible Tools	
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 s _ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239 205, 238, 251 45, 83 72-98 140 114-117 99-105 195 220-222 216-223 213-214 212 52
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 142-144 146-150 146-147 193 197 s _ 247 28 159 181 230-231 182 66, 98 64-65 39, 87 173, 177 41 63, 205, 239 205, 238, 251 45, 83 72-98 140 114-117 99-105 195 220-222 216-223 213-214 212 52
Centrotec Compatible Tools	47 46-47, 88-89 47, 88 47, 88 149 145 1442-144 146-150 146-147 193 197 s

Double Groove Bit Holders 245
Double-sided Tape 197
Double-sided Tape
Dovetail Jigs 154
Dowel Centre Points 196
Dowel Drill Cutters         63, 82           Dowel Drills         207, 237
Dowel Drills 207, 237
Dowels         196           Draining Groove Jigs         168-169
Draining Groove Jigs168-169
Draining Groove Pro 168
Draw Pull Cutters         43,79           Drawer Lock Jointer         29           Drill Bit Guides         239, 245, 251
Drawer Lock Jointer 29
Drill Bit Guides 239, 245, 251
Drill Saw 240
Drilling Tools204-207
Dust Extractor 127-129
Easyscribe 177
Easyset Cutters 49, 90
Economy Trimmers 21
Edge Mould Cutters41-42
Ellipse Jigs 183
Ellipse Jigs 183 Engraving Cutters 18, 30,68-69, 145
Espagnolette Cutters 27
Euro Cylinder Lock Jig 175
F Clamps 210 Fasttrack Sharpeners 220-221
Fasttrack Sharpeners220-221
Fibreglass Cutters66
Fine Height Adjusters193
Finger Jointers 28, 98
Finger Pull Cutters43
Fixing Kits 193
Flat Bits         241           Flexible Curve Guide         189
Flexible Curve Guide 189
Flexible Magnetic Drive 247
Flush Saw 198
Forstners 241
Four Flute Augers 242
Full Face Mask 134
Gemstone Cutter15
Glass Drills 243
Glass Drills243 Glazing Bar Cutters36-37, 86
Grabit <sup>TM</sup> 252
Grabit™ 252 Groovers 58-59, 94
GRP Cutters 66
GRP Cutters
Guided Profilers/Trimmers 20-24, 77-79
Hand Mitre Shears 198
Hand Tools198
Handrail Cutters 36,42,85
Hinge Jigs170-173
Hinge Recessers 13, 75
Hinge Recessers 13, 75 Hinge Sinkers 63, 82, 206, 240
Honing Guide 223
Honing Guide 223 Hoses & Fittings 194
Honing Guide
Honing Guide       223         Hoses & Fittings       194         Hot Rod Jig & Hot Rods       166         HSS Cutters       13-14, 25, 68, 70-71
Honing Guide
Honing Guide       223         Hoses & Fittings       194         Hot Rod Jig & Hot Rods       166         HSS Cutters       13-14, 25, 68, 70-71         Impact Driver Bit Holder       246         Impact Driver Bits       248
Honing Guide       223         Hoses & Fittings       194         Hot Rod Jig & Hot Rods       166         HSS Cutters       13-14, 25, 68, 70-71         Impact Driver Bit Holder       246         Impact Driver Bits       248
Honing Guide

Masonry Drill Bits	243
Masonry Drill Bits Matchlining Cutters	55. 95
Measuring & Marking	212-215
Metal Twist Drill Set	243
Metric Scale Cutters	75
MFT Jig	187
MFT Jig Mini CNC's	142-145
Mini Ellipse Jig	183
Mini Pocket Hole Jig	203
Ministure Cuttors	200
Miniature Cutters	08
Mirror Paste Mitre Corner Jointers	219
Mitre Corner Jointers	29, 98
Mitre Fences	192
Mitre Saw Roller Stand Modular Storage Systems	210
Modular Storage Systems	226-231
Mortise & Fluting Device	181
Mortise & Tenon Jigs	153
Mortise & Tenon Jigs Mortise Cutters	13. 75
Multi Boring Drilling	207
Multi-material Worktop Jig	161
Multi-mould Cuttors	101
Multi-mould Cutters Multi-point Lock System	42
Multiporibo	2/
Multiscribe	210
Multitool Blades	
No-Volt Release Switches	192
Non-slip Mats	211
Nut Drivers	244
_	
Offline Driver	246
Offset BaseOgee Cutters	186
Ogee Cutters	46-47. 88-89
Organisers	229, 231
Oscillating Tool Blades	100
Oscillating Tool Blades 34	1-27 52 94-96
Ovoio Cutters 54	-57, 55, 64-60
Panel Connector Bolts Panel Door Cutters	163
Panel Door Cutters	48-51, 90-93
Panel Door Templates	188
Panel Door TemplatesPCD Sawblade for Gemstone	113
PCD Tooling	15
PCD Tooling Pencil Round Cutter	3/1 83
Perfect Butt™	04, 00
Pierre & Trim Cutters	210
Pierce & Trim Cutters	25, 78
Planer Blades	110
Plug Cutters	239
Plug Makers	205
Plunge Sawblades	113, 116
Pocket Cutters	12, 75
Pocket Hole Jigs	200-203
Pocket Hole Screws	203
Point 2 Point	212
Postform Jigs	158-162
Postform JigsPPE - Personal Protection	130-137
Pro Poutor Table	139
Pro Storago System	220 220
Pro Router Table Pro Storage System Professional Router Cutters Profile Scribers	220-228
Professional nouter Cutters _	40.40.00
Profile Scribers	48-49, 90
Profiling Cutters	20-22, 77
Pushstick	192
Quad Groover Set	56
Quad Groover Set Quick Change Drilling Tools	235-251
Calck Change Dining 10005 _	200 201
Radius CuttersRaised Panel Cutters	
Raised Panel Cutters	44-45, 83
	44-45, 83 _ 50-53, 91-93
Rasps	44-45, 83 50-53, 91-93 66
Rasps	44-45, 83 _ 50-53, 91-93 66 676
RaspsRebate Cutters	66 26,76
Rasps Rebate Cutters Reduction Sleeves	66 26,76 197
Rasps Rebate Cutters Reduction Sleeves	66 26,76 197
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters	66 26,76 197 39 16-19
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner	
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner	
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner	
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over	
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over	
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter	66 26,76 197 38 16-18 234 210 144 34-37, 84-85 61,98
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases	66 26,76 197 38 16-15 234 210 144 34-37, 84-85 156 61,99 181-183, 186
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling	66 26,76 197 38 16-15 234 210 144 34-37, 84-85 156 61,99 181-183, 186
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling	66 26,76 197 38 16-15 234 210 144 34-37, 84-85 156 61,99 181-183, 186
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling	66 26,76 197 38 16-15 234 210 144 34-37, 84-85 156 61,99 181-183, 186
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling	66 26,76 197 38 16-15 234 210 144 34-37, 84-85 156 61,99 181-183, 186
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling	66 26,76 197 38 16-15 234 210 144 34-37, 84-85 156 61,99 181-183, 186
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling Router Pod Safety Stand Router Table Backfence Router Table Insert Plates Router Tables	66 26,76 197 38 16-19 234 210 444 34-37, 84-85 61,99 181-183, 186 63, 82 194 192 192 138-140
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling Router Pod Safety Stand Router Table Backfence Router Tables Router Tables Routers	66, 26,76
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling Router Pod Safety Stand Router Table Backfence Router Tables Router Tables Routers	66, 26,76
Rasps Rebate Cutters Reduction Sleeves Reeding Cutters Replaceable Tip Cutters Resin Cleaner Roller Stand Rotary CNC Rounding Over Routabout Jigs Routaseal Cutter Router Bases Router Drilling Router Pod Safety Stand Router Table Backfence Router Table Insert Plates Router Tables	66 26,76 197 38 16-19 234 210 144 34-37, 84-85 61,98 181-183, 186 192 138-146 120-126 151-197

afety Spectacles	
	137
Safety Spectacles Sash Bar Cutters	37, 85-86
Sawblades	111-118
Screw & Bolt Remover Set Screwdriver Bits	252
Screwdriver Bits	247-251
Scribe-master Pro Scribing lig	150
Scribe-master Pro Scribing Jig Sets (Cutters)	00 10
Seis (Cuiters)	99-100
Shear CuttersShelf Support Template	13
Shelf Support Template	180
Shim Sets	56
Shim SetsShoulder Scribe & Profile Sets	37, 86
Slat Wall	57
Slotting & Grooving	55-50 01-06
Consorth and	14014
Smartbench	146-147
SmartbenchSmokeseal RecesserSnappy Quick Release Tools _	62
Snappy Quick Release Tools _	235-250
Solid Surface Cutters	64-65
Spacer Sets	56
Spanner Bit Set Spare Parts for Cutters	248
Spare Parts for Cutters	106-107
Chiral Cuttors	14 66 7
Spiral Cullers	14, 66-7
Square Edge Worktop Jig	161
Spiral CuttersSquare Edge Worktop JigStaff Bead Cutters & Jointers _	38, 87
Staggered Tooth Cutters	13,75
Stainless Steel Hot Rods Stair Housing Cutters	166
Stair Housing Cutters	32 82
Staircase Jigs	52, 62 155
Ctoolth Lite Dro	100
Stealth Lite Pro	137
Stealth Mask	136
Stealth Vis Straight Cutters Straight Guides Strip Recessing Cutters Strops Strops	135
Straight Cutters	10-13, 73-75
Straight Guides	184
Strin Recessing Cutters	27.76
Ctrops	210 221
Strops	219, 22
Oub-bases	
Sunk Bead	39-40
T Slot Cutters	57
5101 Cutters	
T-Square	215
Tapered Cutters	27
Tapered Cutters Tapered Sharpening Stones	221
Template Guides	188-189
Template Guides Template Profilers	20-22, 77
Templates	188-189
Tenon & Grooving Jig	195
Tonon Cuttor	25
Tenon Cutter	25
Thumb Mould	
	36, 85
Timber Repair Kit Template	36, 85 189
Timber Repair Kit Template Toggle Clamps	36, 85 189
Toggle Clamps Tongue & Groove Cutters	36, 85 189
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters	36, 85 189 211 57, 95
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters	36, 85 189 211 57, 95
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters	36, 85 189 211 57, 95
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags	36, 85 189 211 57, 95 27,76 234 232-233
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags	36, 85 189 211 57, 95 27,76 234 232-233
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets	36, 85 211 57, 95 27,76 234 232-233 226-231
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage	36, 86 189 211 57, 96 27,76 234 232-233 226-231 250-251
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches	36, 86 188 211 57, 98 27,76 234 232-233 226-231 250-251 226-233 224-225
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters	36, 86 188 211 57, 98 27,76 234 232-233 226-231 250-25 226-233 224-225 41, 87
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters	36, 86 188 211 57, 98 27,76 234 232-233 226-231 250-25 226-233 224-225 41, 87
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters	36, 86 188 211 57, 98 27,76 234 232-233 226-231 250-25 226-233 224-225 41, 87
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range	36, 85 186 211 57, 95 27, 76 234 232-233 250-25 226-23; 224-225 241, 87 212 235-250
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote	36, 85 189 211 57, 96 27,76 234 232-233 226-231 250-251 224-225 41, 81 235-256
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote	36, 85 189 211 57, 96 27,76 234 232-233 226-231 250-251 224-225 41, 81 235-256
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote	36, 85 189 211 57, 96 27,76 234 232-233 226-231 250-251 224-225 41, 81 235-256
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote	36, 85 189 211 57, 96 27,76 234 232-233 226-231 250-251 224-225 41, 81 235-256
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades	36, 86
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter	36, 86
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters	36, 85 188 211 57, 95 27,76 234 232-233 226-231 2250-251 226-232 224-225 41, 87 212 235-256 234 20-24, 78-78 116 11
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters	36, 85 188 211 57, 95 27,76 234 232-233 226-231 2250-251 226-232 224-225 41, 87 212 235-256 234 20-24, 78-78 116 11
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters	36, 85 188 211 57, 95 27,76 234 232-233 226-231 2250-251 226-232 224-225 41, 87 212 235-256 234 20-24, 78-78 116 11
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base	36, 88 188 211 57, 98 227,76 234 232-233 226-231 2250-251 241, 87 212 235-256 234 20-24, 78-78 116 55 190
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base	36, 88 188 211 57, 98 227,76 234 232-233 226-231 2250-251 241, 87 212 235-256 234 20-24, 78-78 116 55 190
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184	36, 85 188 211 57, 95 27,76 234 232-233 226-231 226-233 224-225 41, 87 212 235-256 234 20-24, 78-78 116 11 57 190 190 127-126
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184	36, 85 188 211 57, 95 27,76 234 232-233 226-231 226-233 224-225 41, 87 212 235-256 234 20-24, 78-78 116 11 57 190 190 127-126
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184	36, 85 188 211 57, 95 27,76 234 232-233 226-231 226-233 224-225 41, 87 212 235-256 234 20-24, 78-78 116 11 57 190 190 127-126
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184 Veining Bits Vertical Panel Risers	36, 85 188 211 57, 95 27,76 234 232-233 250-251 226-233 224-225 41, 87 212 235-250 234 20-24, 78-73 116 117 157 190 127-125 -186, 208-205 53, 85 51, 91
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184 Veining Bits Vertical Panel Risers	36, 85 188 211 57, 95 27,76 234 232-233 250-251 226-233 224-225 41, 87 212 235-250 234 20-24, 78-73 116 117 157 190 127-125 -186, 208-205 53, 85 51, 91
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184 Veining Bits Vertical Panel Risers Water Channel & Drip Groove Weatherseal Cutters	36, 86 188 211 57, 96 27,76 234 232-233 250-251 226-233 224-224 41, 87 212 235-250 234 20-24, 78-73 116 117-125 -186, 208-205 53, 86 51, 91
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories 184 Veining Bits Vertical Panel Risers Water Channel & Drip Groove Weatherseal Cutters	36, 86 188 211 57, 96 27,76 234 232-233 250-251 226-233 224-224 41, 87 212 235-250 234 20-24, 78-73 116 117-125 -186, 208-205 53, 86 51, 91
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Vertical Panel Risers Water Channel & Drip Groove Weatherseals	36, 88
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Vertical Panel Risers Water Channel & Drip Groove Weatherseals	36, 88
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimple Pack Sawblades  Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Vertical Panel Risers Water Channel & Drip Groove Weatherseal Cutters Weatherseals Winbag Window Industry Cutters	36, 88
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Varijig & Accessories Verical Panel Risers Water Channel & Drip Groove Weatherseals Window Industry Cutters Workshop Router Table	36, 86 188 211 57, 98 27,76 234 232-233 226-231 226-233 224-225 41, 87 212 235-256 234 20-24, 78-75 116 117 57 190 127-129 186, 208-208 51, 91 9 60-61, 96-97 170-77
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Varijig & Accessories Water Channel & Drip Groove Weatherseal Cutters Weatherseals Winbag Window Industry Cutters Workshop Router Table Worktop Connectors	36, 85 188 211 57, 95 27,76 234 232-233 226-231 250-251 226-233 224-225 41, 87 212 235-250 234 20-24, 78-73 116 117-125 -186, 208-205 51, 91 91 177-17 70-71 133
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Varijig & Accessories Water Channel & Drip Groove Weatherseal Cutters Weatherseals Winbag Window Industry Cutters Workshop Router Table Worktop Connectors	36, 85 188 211 57, 95 27,76 234 232-233 226-231 250-251 226-233 224-225 41, 87 212 235-250 234 20-24, 78-73 116 117-125 -186, 208-205 51, 91 91 177-17 70-71 133
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Varijig & Accessories Water Channel & Drip Groove Weatherseal Cutters Weatherseals Winbag Window Industry Cutters Workshop Router Table Worktop Connectors	36, 85 188 211 57, 95 27,76 234 232-233 226-231 250-251 226-233 224-225 41, 87 212 235-250 234 20-24, 78-73 116 117-125 -186, 208-205 51, 91 91 177-17 70-71 133
Toggle Clamps Tongue & Groove Cutters Tonk Strips Cutters Tool & Bit Cleaner Tool Bags Tool Boxes Tool Holder Sets Tool Storage Torches Torus Cutters Trammel Set Trend Snappy Range Trendicote Trendiwax Trimming Cutters Triple Pack Sawblades Ultimate Router Cutter Undercut Cutters Unibase Universal Sub-base Vacuum Extractors Varijig & Accessories Varijig & Accessories Varijig & Accessories Verical Panel Risers Water Channel & Drip Groove Weatherseals Window Industry Cutters Workshop Router Table	36, 88 188 211 57, 98 227,76 234 232-233 226-231 226-233 226-233 224-225 41, 87 212 235-256 234 20-24, 78-78 116 57 190 127-128 60-61, 96-97 177 70-71 133 166 158-168

