

Joinery Seals & Glazing

For Timber Windows & Doors



All Exitex sealing and glazing systems are manufactured to the highest standards, incorporating many unique patented features.

Quality you can trust

Aluminium Hardened High Tensile to BS 1474

Anodising 15-25 Micrometers BS 3987

Powder Coating 60-80 Micrometers BS 6496

EPDM Gaskets to BS 4255

EPDM Cellular Rubber Gaskets to SS 243705A1, SS81813

PVC Gaskets to BS 7412







For Timber Windows & Doors

Joinery Seals & Glazing

Contents

•	Aquatex™	4
•	Weatherseals for Sliding Sash Windows	10
•	Self Adhesive Seals	20
	Joinery Seals Wiper	21
•	Joinery Seals Compression	22
•	Aluminium Glazing Beads & Accessories	28
•	Self Adhesive EPDM Dry Glaze Profiles	31
•	Glazing Wedge Gasket for Secret Nailing	32
•	Push Fit & Single Sided Glazing Gaskets	34
	Double Sided Tapes	35
•	Tilt & Turn Weatherbar	38
•	Securbead	40
•	Lokbead	42
•	Timber Bead Glazing Clips	44
	Glazing Accessories	46
•	Intumescent Seals	48
•	Automatic Door Bottom Seals	51

High Performance Weatherseals for Windows & Doors

Key Performances Materials

Temperature Range: -40°C to +70°C.

Compression Set: <15%

UV Stability: 5000 hrs QUV tester. UVB 313 bulb.

(4hrs light / 4hrs dark cycle)

Outer skin. Polyethylene.

(Properties include: inert, low friction, UV stable, colour options)

Foam Core. Polyurethane. (Properties include: excellent memory over extended temp range)


Inserts. Polypropylene (Properties include: longitudinal stability and secure fixing)

Features

- P.U. foam core provides excellent recovery after long-term deflection.
- Working temperature range -40°C to +70°C
- Thicker polyethylene outer sheathing improves resistance to wear & tear.
- Deflection ranges to cope with tolerance & seasonal movement of seal gap.
- Excellent UV stability.
- Outer skin not affected by paints & stains.
- Aquatex[™] does not propagate mould growth or mildew.

• Standard colours brown, white & black.

POLYURETHANE FOAM CORE

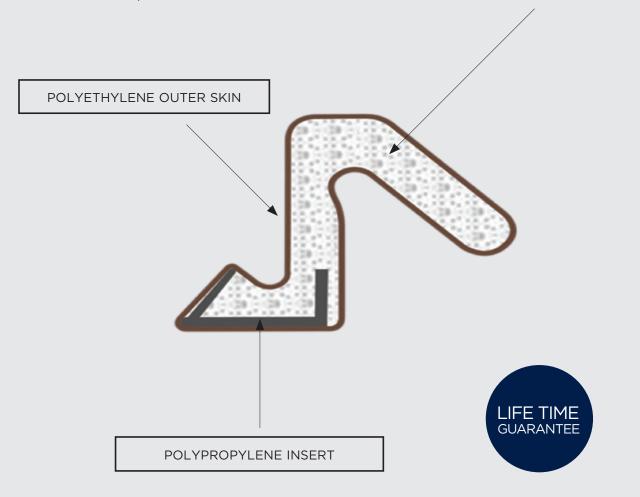

Aquatex A15

Seals gaps 9 - 15mm


Conforms to BS 12365-12003

Classification W72560

2.1m Lengths, 125L/Box

Available in white, brown & black

Ref: 1.27.0065

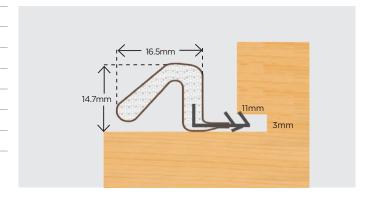

Aquatex A14

Seals gaps 10 - 15mm


Conforms to BS 12365-12003

Classification W72560

2.1m Lengths, 150L/Box

Available in white, brown & black

Ref: 1.27.0189

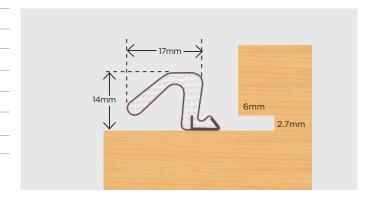

Aquatex A13

Seals gaps 5.5 - 12mm


Conforms to BS 12365-12003

Classification W62560

350m/Box (2 x 175m)

Available in white, brown & black

Ref: 1.28.0700

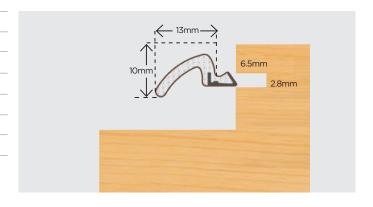

Aquatex A10

Seals gaps 4.5 - 8mm


Conforms to BS 12365-12003

Classification W32560

10m, 25m, 100m, 500m/Box (2 x 250m)

Available in white, brown & black

Ref: 1.27.0021

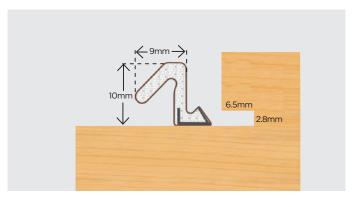

Aquatex™

Aquatex A9

Seals gaps 6 - 11.5mm


Conforms to BS 12365-12003

Classification W52560

400m/Box (2 x 200m)

Available in white, brown & black

Ref: 1.27.0569

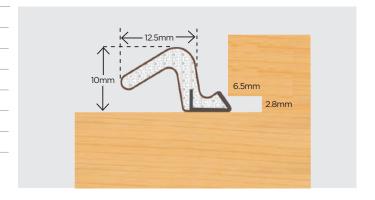

Aquatex A5

Seals gaps 4 - 8.5mm


Conforms to BS 12365-12003

Classification W43560

600m/Box (2 x 300m)

Available in white, brown & black

Ref: 1.27.0562

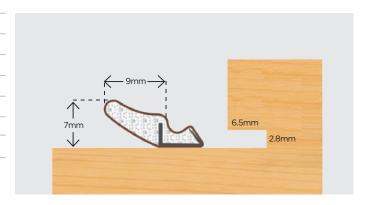

Aquatex P3

Seals gaps 4 - 6.4mm


Conforms to BS 12365-12003

Classification W26560

400m/Box (2 x 200m)

Available in white, brown & black

Ref: 1.27.0033

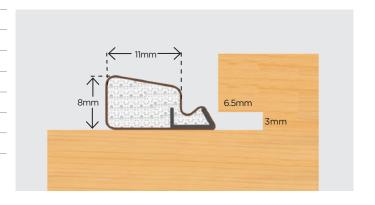

Aquatex P6

Seals gaps 4 - 6mm


Conforms to BS 12365-12003

Classification W23560

600m/Box (2 x 300m)

Available in white, brown & black

Ref: 1.27.0063

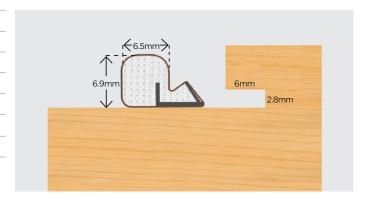

Aquatex P8

Seals gaps 2 - 3.5mm


Conforms to BS 12365-12003

Classification W15560

10m, 25m, 100m, 700m/Box (2 x 350m)

Available in white, brown & black

Ref: 1.27.0048

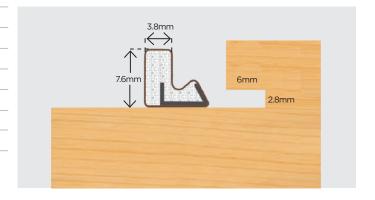

Aquatex P9

Seals gaps 2.8 - 4.5mm


Conforms to BS 12365-12003

Classification W15560

600m/Box (2 x 300m)

Available in white & black

Ref: 1.27.0154

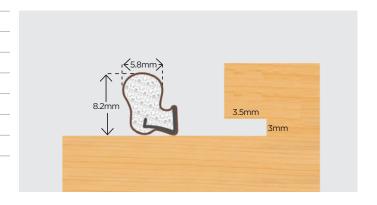

Aquatex P10

Seals gaps 3.5 - 5.5mm


Conforms to BS 12365-12003

Classification W45560

500m/Box (2 x 250m)

Available in white, brown & black

Ref: 1.27.0484

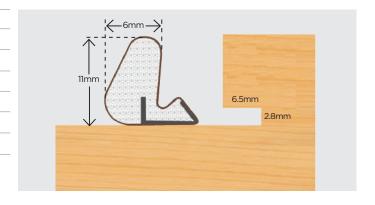

Aquatex P11

Seals gaps 4.5 - 6mm


Conforms to BS 12365-12003

Classification W35560

10m, 25m, 100m, 500m/Box (2 x 250m)

Available in white, brown & black

Ref: 1.27.0109

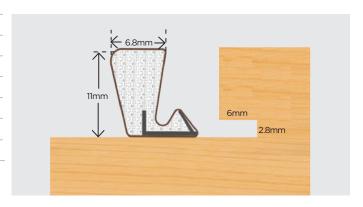

Aquatex™

Aquatex S20

Seals gaps 5 - 7.5mm


Conforms to BS 12365-12003

Classification W43560

250m/Box (2 x 125m)

Available in white, brown & black

Ref: 1.27.0124

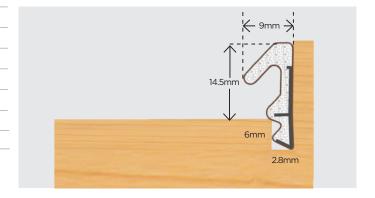

Aquatex S21

Seals gaps 5 - 8mm


Conforms to BS 12365-12003

Classification W33560

300m/Box (2 x 150m)

Available in white, brown & black

Ref: 1.28.0091

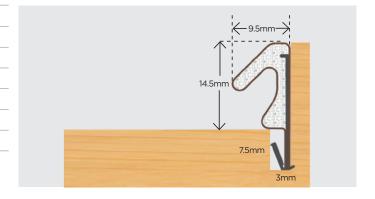

Aquatex S22

Seals gaps 5 - 8mm


Conforms to BS 12365-12003

Classification W33560

300m/Box (2 x 150m)

Available in white, brown & black

Ref:1.27.0310

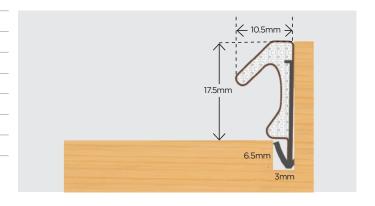

Aquatex S25

Seals gaps 5 - 6.5mm


Conforms to BS 12365-12003

Classification W34560

200m/Box (2 x 100m)

Available in white, brown & black

Ref: 1.28.0097

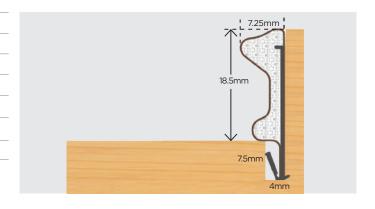

Aquatex D Slot 4.8mm x 5mm

Seals gaps 3.5 - 4.8mm


Conforms to BS 12365-12003

Classification W14560

1220m/Box (2 x 610m)

Available in white, brown & black

Ref: 1.28.0069

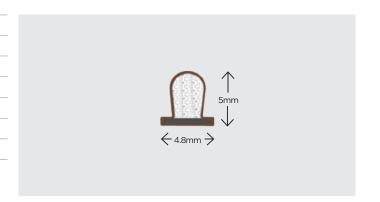

Aquatex D Slot 4.8mm x 6.5mm

Seals gaps 4.5 - 6mm


Conforms to BS 12365-12003

Classification W24560

900m/Box (2 x 450m)

Available in white, brown & black

Ref: 1.28.0070

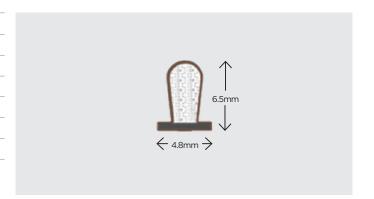

Aquatex D Slot 4.8mm x 7.5mm

Seals gaps 5.5 - 7mm


Conforms to BS 12365-12003

Classification W23560

600m /Box (2 x 300m)

Available in white, brown & black

Ref: 1.28.0071

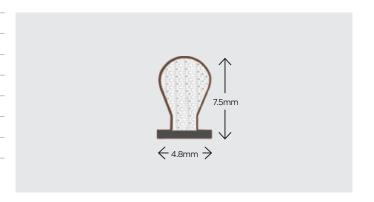

Aquatex D Slot 4.8mm x 9.5mm

Seals gaps 6.5 - 9 mm


Conforms to BS 12365-12003

Classification W24560

600m/Box (2 x 300m)

Available in white, brown & black

Ref: 1.28.0072

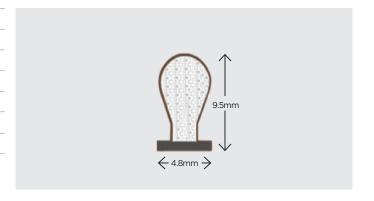



Weatherseals for Sliding Sash Windows

- A Pile Carrier, Slidex, Staff Seal
- **B** Parting Bead

C Meeting Rail Pile Carrier



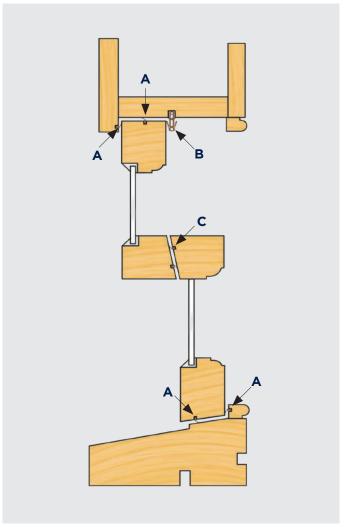



Parflip 12mm

Ref: 1.10.0180 Parflip 16mm


Ref: 1.10.0181


Length - 3m

Available in brown, white & cream

Length - 3m

Available in brown, white & pine





Partex

Ref: 1.10.0175

Partex c/w D-slot 4.8mm x 7.5mm


Ref: 1.10.0186


Length - 3m

Available in brown, white & cream

Length - 3m

Available in brown & white

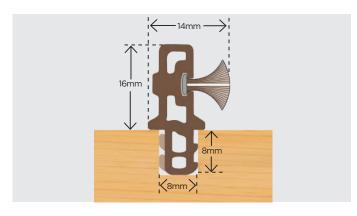



Retaining Profile 10mm for Partex/Parflip

Ref: 1.10.0190

Meeting Rail Pile Carrier c/w 6.5mm Pile & Fin


Ref: 1.10.0425


Length - 3m

Available in brown, white & cream

Length - 3m

Available in brown & white

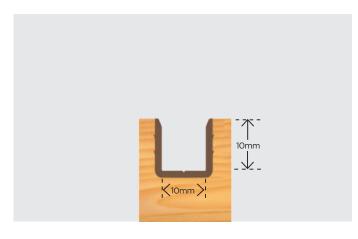



Timber Parting Bead with Pile Carrier 7mm x 25mm / 8mm x 25mm

Timber Parting Bead with Carrier & 6.5mm Pile & Fin 7mm x 25mm / 8mm x 25mm

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0001 (7mm)


Ref: 1.40.0002 (8mm)


Length - 3m

Available in - primed & unprimed

Ref: 1.40.0003 (7mm)

Ref: 1.40.0004 (8mm)





Timber Parting Bead with Pile Carrier 7mm x 28mm / 8mm x 28mm

....., 611...., 2611....

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0005 (7mm)

Ref: 1.40.0006 (8mm)


Timber Parting Bead with Carrier & 6.5mm Pile & Fin 7mm x 28mm / 8mm x 28mm


Length - 3m

Available in - primed & unprimed

Ref: 1.40.0007 (7mm)

Ref: 1.40.0008 (8mm)

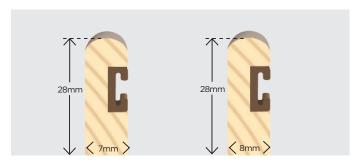



Timber Parting Bead with Pile Carrier 14mm x 22mm

Timber Parting Bead with Carrier & 6.5mm Pile & Fin 14mm x 22mm

Length - 3m


Available in - primed & unprimed


Ref: 1.40.0009

Length - 3m

Available in - primed & unprimed

Ref: 1.40.0010

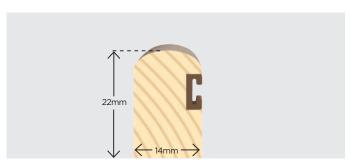



Timber Staff Bead 20mm x 15mm with Pile Carrier

Timber Staff Bead 20mm x 15mm with Carrier & 6.5mm Pile & Fin

Length - 3m


Available in primed & unprimed


Ref: 1.40.0011

Length - 3m

Available in primed & unprimed

Ref: 1.40.0012





Timber Staff Bead 25mm x 15mm with Pile Carrier

Timber Staff Bead 25mm x 15mm with Carrier & 6.5mm Pile & Fin

Length - 3m


Available in primed & unprimed


Ref: 1.40.0013

Length - 3m

Available in primed & unprimed

Ref: 1.40.0014

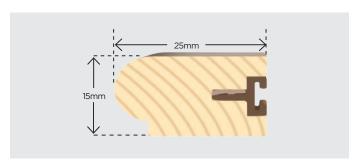



Timber Staff Bead 28mm x 15mm with Pile Carrier

Timber Staff Bead 28mm x 15mm with Carrier & 6.5mm Pile & Fin

Length - 3m


Available in primed & unprimed


Ref: 1.40.0023

Length - 3m

Available in primed & unprimed

Ref: 1.40.0024

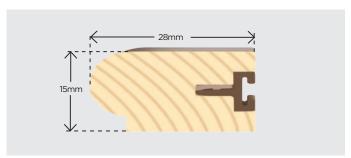




Timber Staff Bead 20mm x 20mm with Pile Carrier

Length - 3m Ref: 1.40.0015 Length - 3m


Available in primed & unprimed



Timber Staff Bead 24mm x 20mm with Pile Carrier

Length - 3m Ref: 1.40.0017


Available in primed & unprimed



Timber Staff Bead 28mm x 20mm with Pile Carrier

Length - 3m Ref: 1.40.0019


Available in primed & unprimed

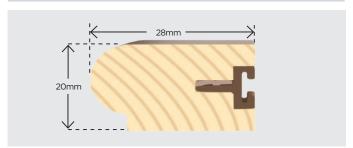

Timber Staff Bead 33mm x 16mm with Pile Carrier

Length - 3m Ref: 1.40.0021


Available in primed & unprimed

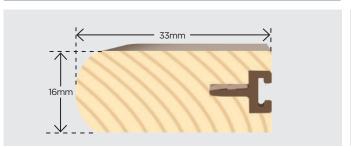

Timber Staff Bead 20mm x 20mm with Carrier & 6.5mm Pile & Fin

Length - 3m Ref: 1.40.0016


Available in primed & unprimed



Timber Staff Bead 24mm x 20mm with Carrier & 6.5mm Pile & Fin

Length - 3m Ref: 1.40.0018


Available in primed & unprimed



Timber Staff Bead 28mm x 20mm with Carrier & 6.5mm Pile & Fin

Length - 3m Ref: 1.40.0020


Available in primed & unprimed



Timber Staff Bead 33mm x 16mm with Carrier & 6.5mm Pile & Fin

Length - 3m Ref: 1.40.0022

Available in primed & unprimed



Offset Leg Carrier

Length - 2.2m

Available in brown & white


Ref: 1.10.0310


Centre Leg Carrier

Length - 2.2m

Available in brown & white

Ref: 1.10.0300





Self Adhesive Carrier

Length - 2.2m

Available in brown & white


Ref: 1.10.0320


Non Adhesive Carrier

Length - 2.2m

Available in brown, white & black

Ref: 1.10.0340

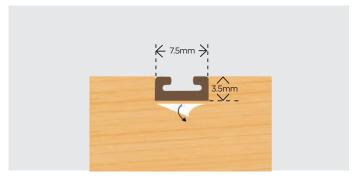



Offset Leg Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m


Available in brown & white


Ref: 1.10.0311

Centre Leg Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m

Available in brown & white

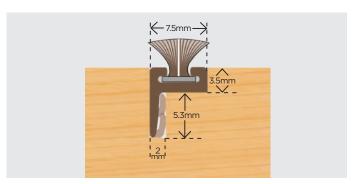



Self Adhesive Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m

Available in brown & white


Ref: 1.10.0321


Non Adhesive Pile Carrier with 6.5mm Pile & Fin

Length - 2.2m

Available in brown & white

Ref: 1.10.0326





Offset Leg Carrier with D slot 6.5mm

Length - 2.2m

Available in brown & white


Ref: 1.10.0362


Centre Leg Carrier with D slot 6.5mm

Length - 2.2m

Available in brown & white

Ref: 1.10.0361

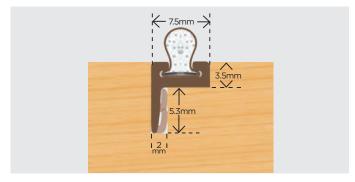



Length - 2.2m


Available in brown & white


Ref: 1.10.0360

Self Adhesive Carrier with D slot 6.5mm Non Adhesive Carrier with D slot 6.5mm

Length - 2.2m

Available in brown & white

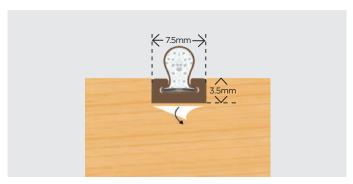



Slide Pile 4.8mm x 5mm with Fin

Slide Pile 4.8mm x 6.5mm with Fin

Roll Size: 100m


Available in white, grey & brown


Ref: 1.06.0351

Roll Size: 100m

Available in white, grey & brown

Ref: 1.06.0354





Slide Pile 4.8mm x 8.5mm with Fin

Roll Size: 100m

Available in white, grey & brown


Ref: 1.06.0357


Slide Pile 4.8mm x 12mm with Fin

Roll Size: 100m

Available in grey

Ref: 1.06.0369





Slide Pile 6.7mm x 7mm

Roll Size: 250m

Available in grey


Ref: 1.06.0386


Slide Pile 6.7mm x 11mm

Roll Size: 200m

Available in grey

Ref: 1.06.0513

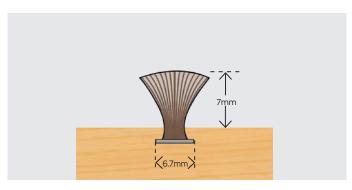



Slide Pile 6.7mm x 12mm with Fin

Roll Size: 200m

Available in grey

Ref: 1.06.0368

Slide Pile 6.9mm x 13mm (with & without fin)


Roll Size: 200m


Available in grey without fin

Ref: 1.06.0371

Available in black with fin

Ref: 1.06.0514





Slide Pile 6.9mm x 14mm

Roll Size: 150m

Available in grey


Ref: 1.06.0501


Self Adhesive Pile 6.7mm x 5mm

Roll Size: 100m

Available in white, grey & brown

Ref: 1.06.0348

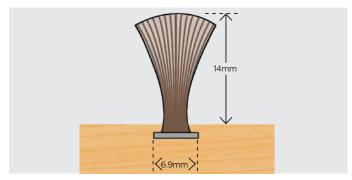



Self Adhesive Pile 6.7mm x 10mm

Roll Size: 200m

Available in grey


Ref: 1.06.0361


Self Adhesive Pile 5mm x 12mm

Roll Size: 150m

Available in grey

Ref: 1.06.0364

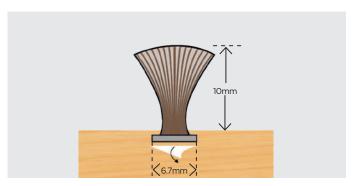




TCT Cutter 1/4" Shank for 4.8mm Base Pile

TCT Cutter 1/4" Shank for Self Adhesive Pile Carrier

Ref: 1.25.0020

Ref: 1.25.0035







TCT Cutter 1/2" Shank for Centre Leg Pile Carrier

TCT Cutter 1/2" Shank for Offset Leg Pile Carrier

Ref: 1.25.0025

Ref: 1.25.0030

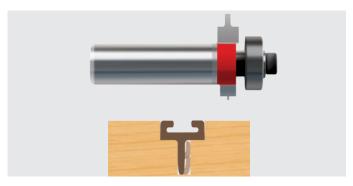



Staff Seal

Length - 2.4m


Available in brown & white


Ref: 1.10.0420

Slidex

Length - 3m

Available in brown & white

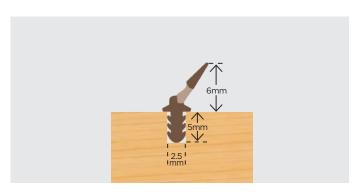



Self Adhesive Seals

E Strip 4mm x 9mm

Roll - 100m, self adhesive

Available in brown & white


Ref: 1.03.0001

P Strip 9mm x 5.5mm

Roll - 100m, self adhesive

Available in black, brown & white

Ref: 1.03.0002





V Strip 9mm x 7mm

Roll - 100m, self adhesive

Available in brown & white


Ref: 1.03.0003


V Flap 12.5mm x 12.5mm

Length - 2.1m, self adhesive

Available in black, white & brown

Ref: 1.03.0008

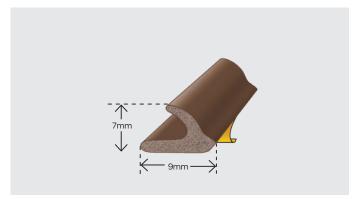



Constructor D 10mm x 12mm

Roll - 50m, self adhesive

Available in black

Ref:1.03.0065


Constructor D 17mm x 21mm

Roll - 50m, self adhesive

Available in black

Ref: 1.03.0066





JSIF Wiper Seal


Seals gaps 4 - 7mm

Roll - 150m/Box

Material - TPE

Available in black, brown & white

Ref: 1.10.0170

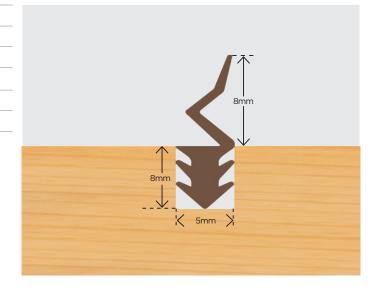

Flipex Wiper Seal


Seals gaps 4 - 7mm

Roll - 150m/Box

Material - TPE

Available in black

Ref: 1.10.0155

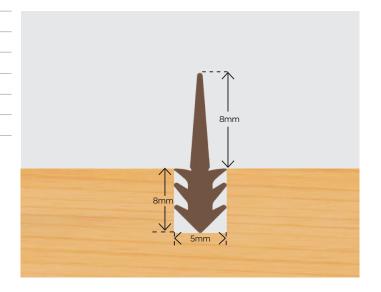


Cabitex Joinery Seal

Seals gaps 3 - 5mm

Roll - 100m/Box

Material - PVC Nitrile

Available in brown & white

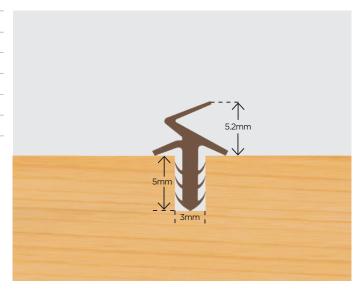

Joinery Seals Compression

Tubex 6mm Joinery Seal


Seals gaps 3 - 5mm

Length - 100m/Box

Material - PVC Nitrile

Available in brown & white

Ref: 1.10.0470

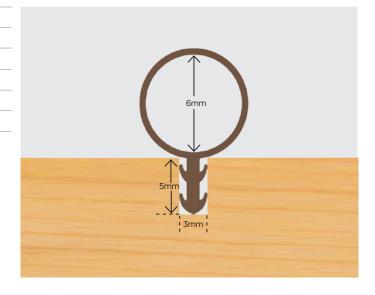

Tubex 7.5mm Joinery Seal


Seals gaps 3 - 6.5mm

Length - 100m/Box

Material - PVC Nitrile

Available in black, white & brown

Ref: 1.10.0471

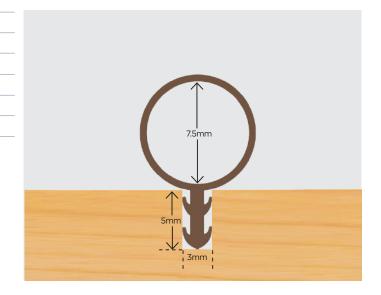


Tubex 8mm Joinery Seal

Seals gaps 3 - 7mm

Length - 100m/Box

Material - PVC Nitrile

Available in black

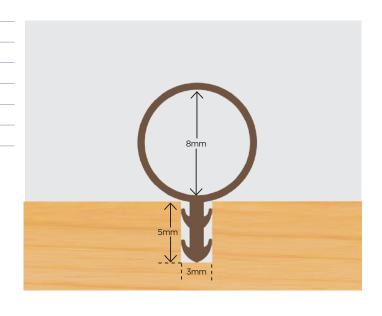

Tubex 8.5mm Joinery Seal


Seals gaps 3 - 7.5mm

Length - 100m/Box

Material - Silicone rubber

Available in black, brown & white

Ref: 1.19.0475

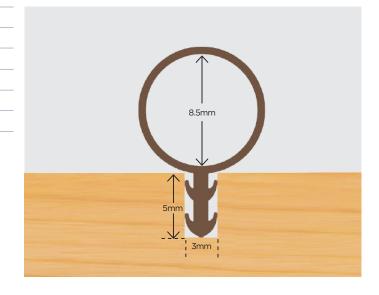

JOSC 7mm Joinery Seal


Seals gaps 3 - 6mm

Length - 150m/Box

Material - Dual Hard TPE

Available in black

Ref: 1.10.0161

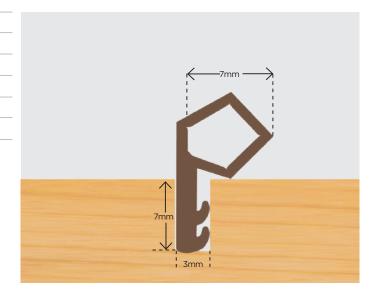


JOSC 9mm Joinery Seal

Seals gaps 3 - 8mm

Length - 100m/Box

Material - Dual Hard TPE

Available in black, white & brown

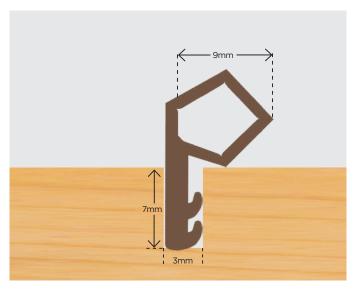

Joinery Seals Compression

Weldex S20


Seals gaps 5 - 8mm

Length - 150m/Box

Material -TPE

Available in black & white

Ref: 1.10.0286

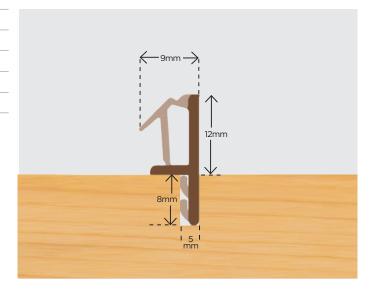

Weldex S23


Seals gaps 5 - 8mm

Length - 150m/Box

Material -TPE

Available in black & white

Ref: 1.10.0287

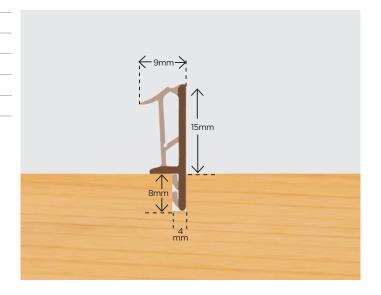


Weldex S26

Seals gaps 5 - 8mm

Length - 150m/Box

Material -TPE

Available in black & white

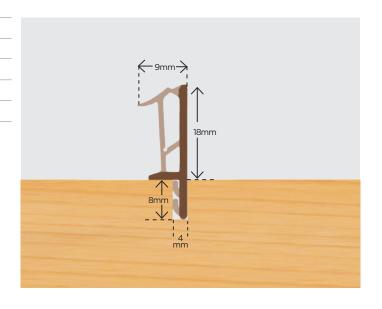

Compex A10


Seals Gaps - 4-6mm

Box - 495m (11 x 45m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0007

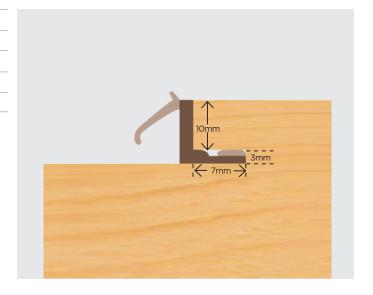

Compex A12


Seals Gaps - 4-6mm

Box - 495m (11 x 45m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0057

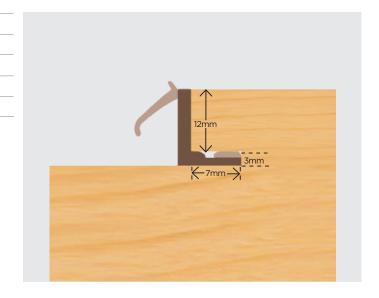


Compex S16.5

Seals Gaps - 4-6mm

Box - 400m (8 x 50m)

Material - Dual Hard PVC

Available in brown & white

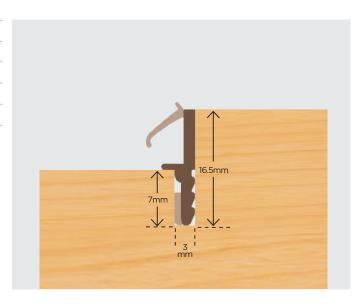

Joinery Seals Compression

Compex S19


Seals Gaps - 4-6mm

Box - 350m (7 x 50m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0015

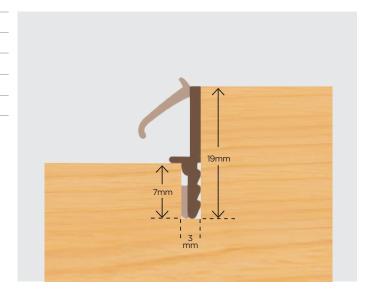

Compex S20


Seals gaps - 4-6mm

Box - 350m (7 x 50m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0016

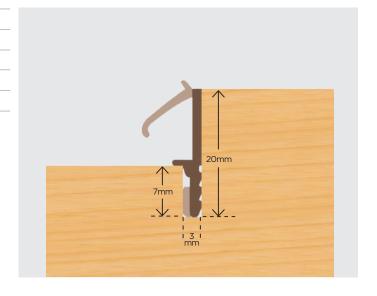


Compex S22

Seals Gaps - 4-6mm

Box - 300m (6 x 50m)

Material - Dual Hard PVC

Available in brown & white

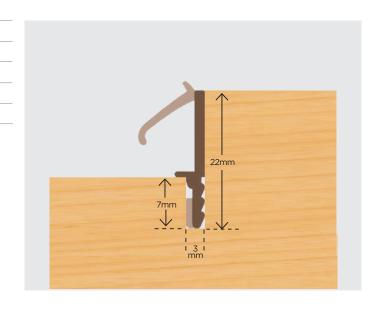

Compex S25


Seals Gaps - 4-6mm

Box - 270m (6 x 45m)

Material - Dual Hard PVC

Available in brown & white

Ref: 1.10.0021

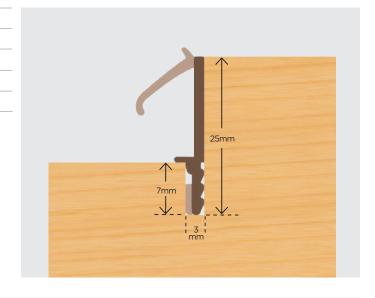


Threshold Sealing Bar

Lengths - 914mm, 2.4m & 3m

Rigid PVC body with flexible flipper

Available in brown

Ref: 1.10.0450

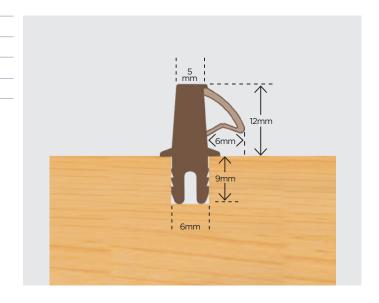


Threshold Sealing Bar 2

Lengths - 914mm, 2.4m & 3m

Rigid PVC body with flexible flipper


Available in brown

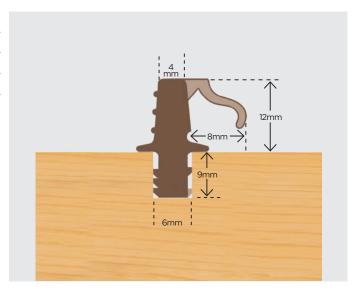

Aluminium Glazing Beads & Accessories

- A Tapered Wedge Packers for 14mm, 20mm, 24mm & 28mm units
- **B** Aluminium Window Trim ref: PWT/17
- **C** Corner Mouldings ref: PWT/17/CM
- **D** Posilok patented End Cap ref: PSL/JPEC

- **E** Angled or Flat drained Setting Blocks for 14mm, 20mm & 28mm units
- F Posilok patented Aluminium Ventilated Bottom Bead
- **G** Posilok combined Anchoring 'n' Setting Block
- **H** Double Sided Lipped Security Glazing Tape

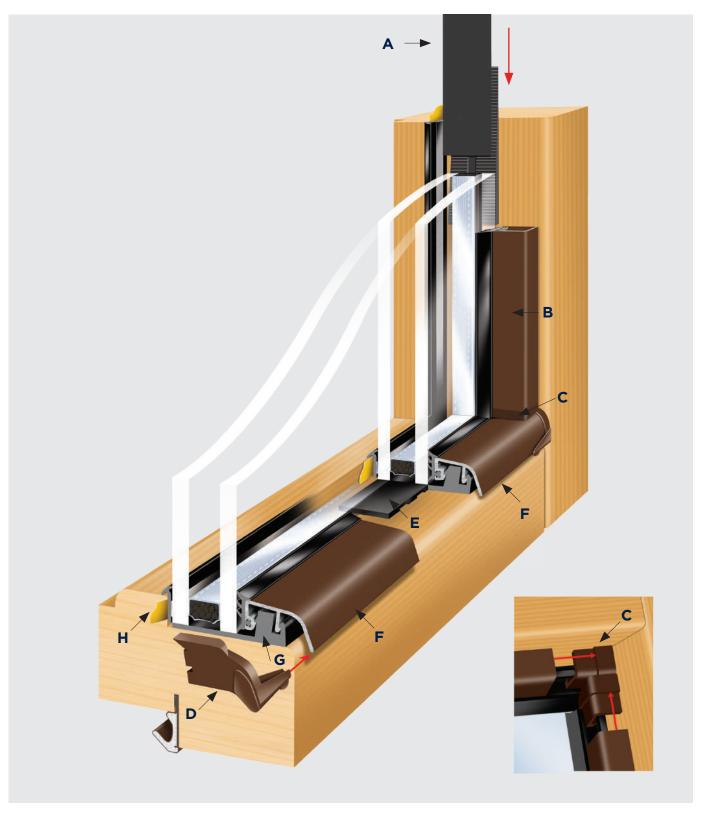


Ventilated Aluminium Glazing Beads

PWT 17mm Aluminium Bottom/Side Bead

Length - 3m

Available in mill, SAA, white, brown & black

Ref: 1.08.0200

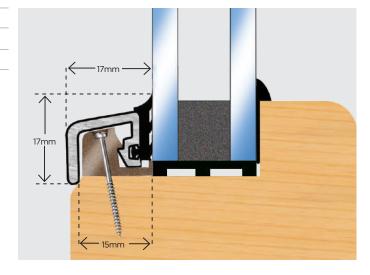


PWT High Security Window Trim

Length - 3m

Available in mill, SAA, white, brown & black

- A Internal Wedge Gasket
- **B** Aluminium Fixing Block

Ref: 1.08.0300

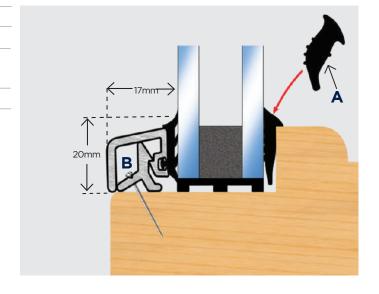


Posilok 24mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown, black & cream

Ref: 1.08.0024

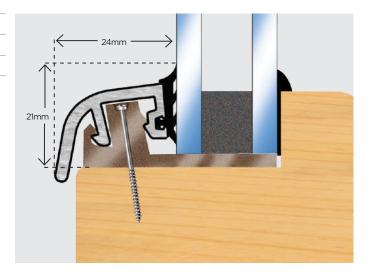


Ventilated Aluminium Glazing Beads

Posilok 32mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown, black & cream

Ref: 1.08.0032

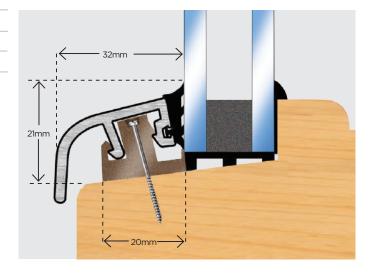


Posilok 40mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown & black

Ref: 1.08.0040

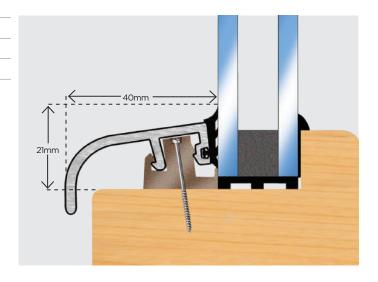


Posilok 53mm Ventilated Aluminium Bottom Bead

Length - 3m

Available in mill, SAA, white, brown & black

Ref: 1.08.0053

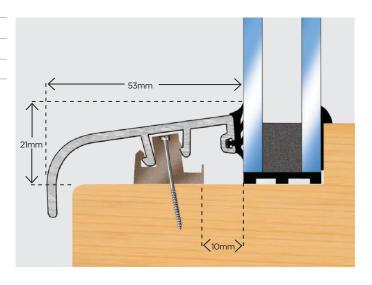


Self Adhesive EPDM Dry Glaze Profiles

Self Adhesive EPDM Dry Glaze Profiles



Profile	Width x Height	Reel	Colours
M 2 x 8mm	2mm x 8mm	200m	black /white
M 3 x 8mm	3mm x 8mm	150m	black
M 3 x 9mm	3mm x 9mm	150m	black/brown/white
M 3 x 12mm	3mm x 12mm	100m	black
M 3 x 15mm	3mm x 15mm	50m	black
M 4 x 8mm	4mm x 8mm	125m	grey
M 4 x 9mm	4mm x 9mm	125m	black
M 4 x 15mm	4mm x 15mm	50m	black
M 4 x 20mm	4mm x 20mm	50m	black
M 5 x 10mm	5mm x 10mm	100m	black
M 8 x 15mm	8mm x 15mm	50m	black

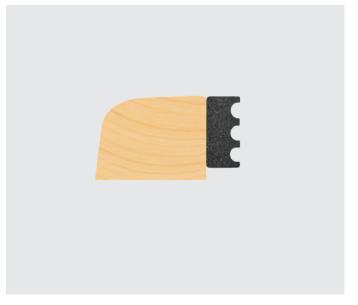

Ref: 1.03

Profile	Width x Height	Reel	Colours
MH 6 x 10mm	6mm x 10mm	50m	black

Ref: 1.03.0060

Profile	Width x Height	Reel	Colours
LS 3.4mm x 13.5mm	3.4mm x 13.5mm	100m	black
Ref: 1.03.0110			






Secret Nailing, no damage to paint coating

A Glazing Wedge Gasket 8x9.5mm

B Secret Nailing

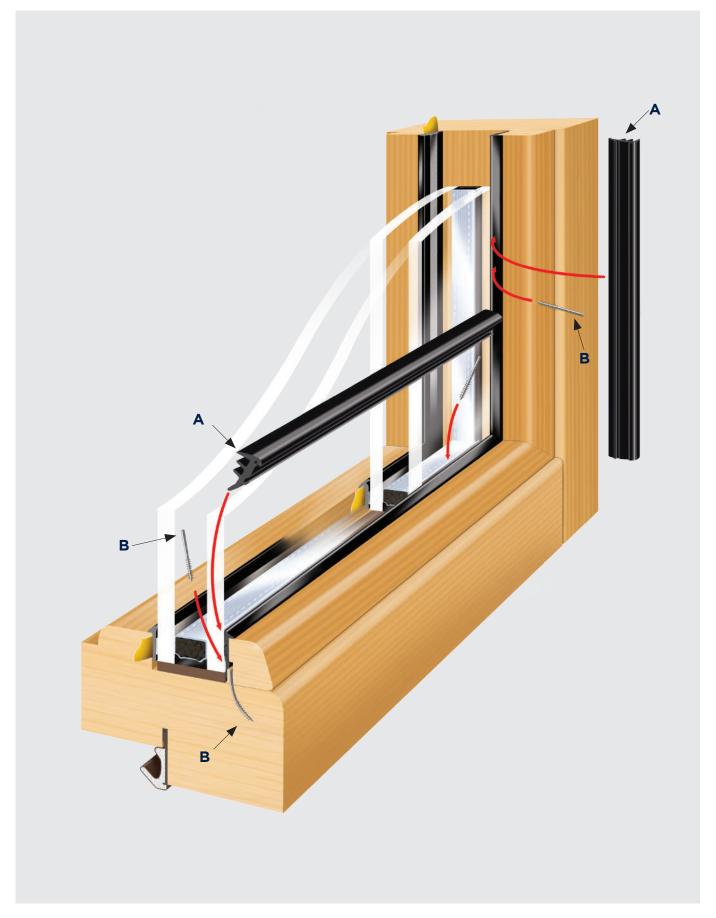

Glazing Wedge Gasket

A Glazing Wedge Gasket - Dual Hard TPE

B Secret Nail


C Machined Timber Bead


Roll Size - 100m

Available in black & white

Ref: 1.10.0283

Machining Detail

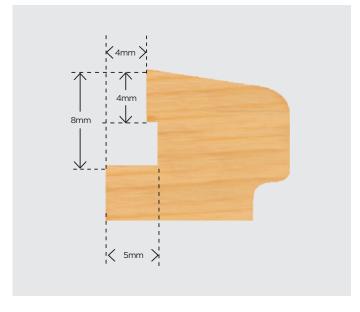

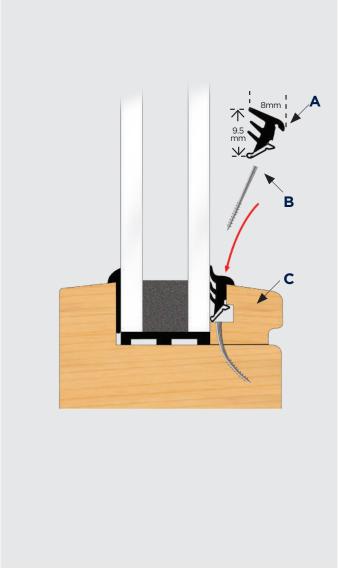


Aluminium Sill Extension For Timber Windows

Length - 3m

Available in mill, SAA, white & brown

Ref: 1.08.0260

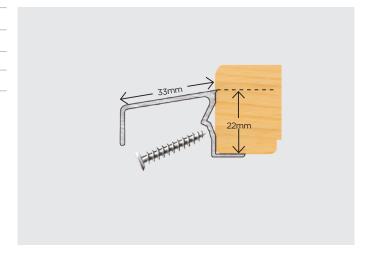

Push Fit & Single Sided Glazing Gaskets

Push Fit & Single Sided Glazing Gaskets




DGBS/AS 3 x 15mm

Roll 300m

Available in black & white (lubricated)

Black Ref: 1.09.0020

White Ref: 1.10.0121

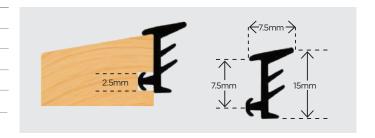


DGBS/RT 2 x 12mm

Roll 400m

Available in black (talc / lubricated)

Ref: 1.09.0022

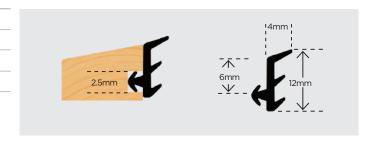

Single Sided Lipped Glazing Tape

Rigid spine for ease of application

Available in black & white

Ref: 1.10.0171 SLGT 0.8 x 7.5mm x 33m



Double Sided PVC Security Glazing Tape



Specification

Our high security PVC glazing tape is closed cell, compressible, high density PVC coated with pressure sensitive moisture resistant solvent acrylic adhesive protected by a siliconised paper liner approved to BS 7950 (1997).

We offer a range of thicknesses & widths. The width should match the rebate/upstand height. We recommend a minimum of 10mm contact width to the frame but the greater the width the better the performance. Always ensure a clean & dry surface with the tape aligned to the top of the rebate without being stretched. Butt, or mitre corners & immediately prior to glazing remove the protective siliconised release paper. Our security PVC glazing tape is recommended to be used under 20% compression in order to maintain a water tight seal.

Storage

- Store in dry conditions & apply between +10°C & +35°C
- Shelf life 1 year

Double Sided Lipped Glazing Tape



Rigid spine for ease of application

Roll: 100m

Available in black & white

DLGT 1.8 x 12.8mm x 100m

Double Sided Tapes

Georgian Bar Tape


A Siliconised paper or filmic liner

B Crosslinked PE foam

C Pressure sensitive acrylic adhesive

Thickness (mm) 1 1.6 2

Roll Length (m) 50 46 46

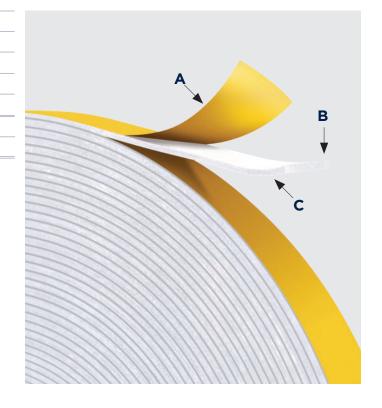

Specification

A high tack acrylic adhesive tape offering a good balance of peel & shear performance with excellent environmental resistance. The product has been designed for both internal & external applications.

The foam is a high quality Polyolefin with a high degree of colour stability & excellent key to the adhesive surface. The thickness & density range has been chosen to offer a conformable product for uneven, irregular or contoured materials.

The acrylic adhesive has good weathering & chemical resistance properties.


Available in black & white as a double sided tape in thicknesses 1mm, 1.6mm & 2mm protected by a siliconised paper liner in a range of widths.

Storage

- Store in dry conditions & apply between +10°C and +35°C
- Shelf life 1 year



Clear Acrylic Bonding Tape

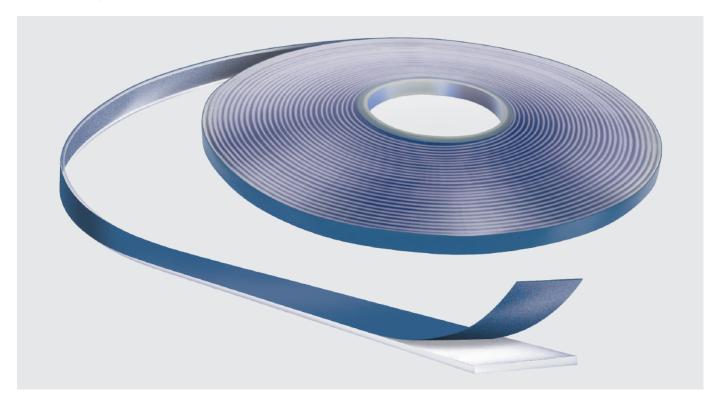

Unique Attributes	Thickness (mm) 1 1.5 2 3
Easy release liner	
Clear Tape	Roll length (m) 33 33 25 12
Very high bond strength	
Solid acrylic core	Typical Applications
Good quick stick	Security Glass Lamination
Distributes shock	Window and door decoration bars

Specification

Exitex acrylic bonding tape is a clear solid acrylic tape that is virtually invisible after application. Available in 1mm, 1.5mm, 2mm & 3mm thicknesses in a range of widths.

Designed with a solid acrylic core once adhered it will increase in bond strength over time & its performance will enhance with elevated temperature. Exitex acrylic tape has excellent weathering properties.

Instructions


For maximum adhesive performance, prepare the contact surface by removing dirt, wax, soap and oily films with a cleaning solvent. A typical cleaning solvent is a 50 / 50 isopropyl alcohol / water mixture. It may be necessary to seal and/or prime the contact surface.

The greater the adhesive-to-surface contact (known as wet-out), the better the adhesive bond strength. Apply the tape to the first surface with the liner on, & firmly rub down. Remove the liner just prior to bonding surfaces together and apply firm pressure to ensure full contact. Bond strength is dependent on the substrate surface, application temperature & dwell time. When possible, allow 24 hours dwell time at room temperature before loading.

Tilt & Turn Weatherbar

Tilt & Turn Weatherbar

- A Tilt & Turn Weatherbar
- **B** End Cap
- C Aquatex Joinery Seal

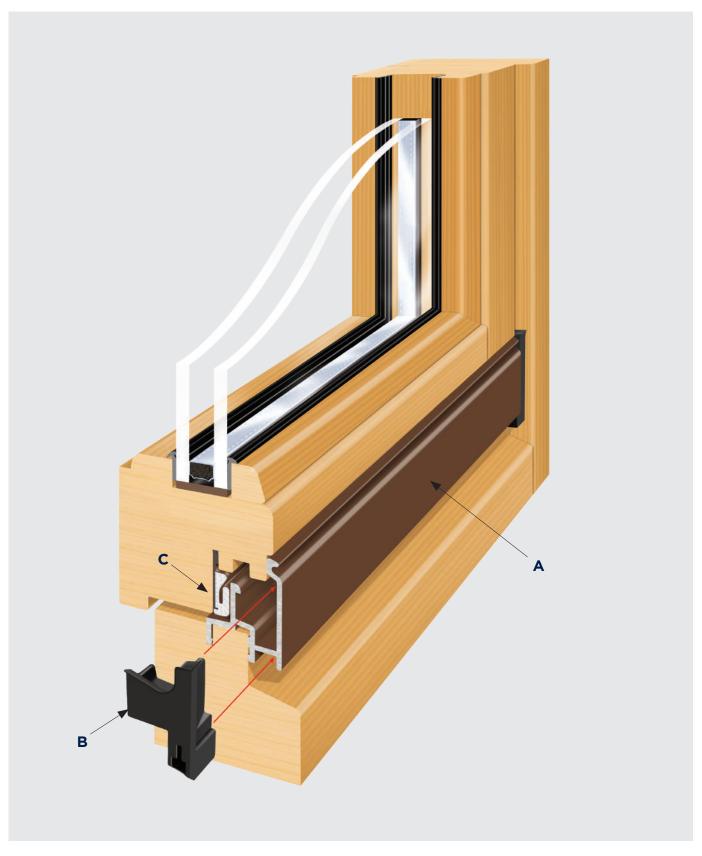


Tilt & Turn Weatherbar - Detail 1


Length - 2m

Available in brown, white & SAA

Ref: 2.23.0792

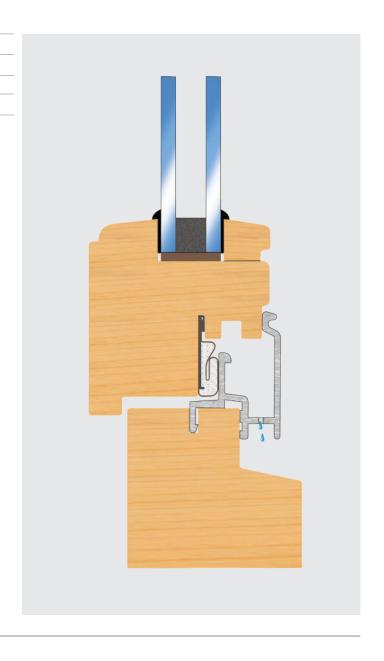


Tilt & Turn Weatherbar - Detail 2

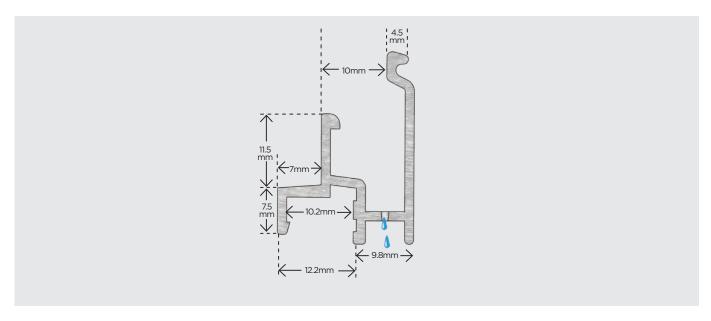

Securbead

Glazing without external fixings, no damage to paint coating

A Securbead B Machined Timber Bead

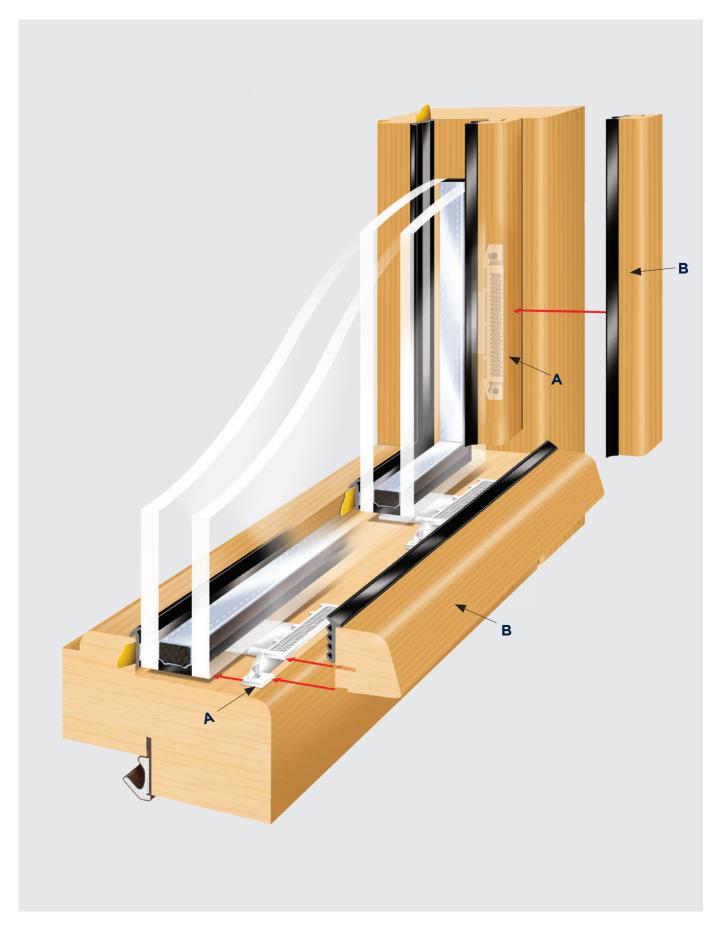



Securbead

Securbead 1mm

Ref: SCB/1mm Securbead 2mm

Ref: SCB/2mm

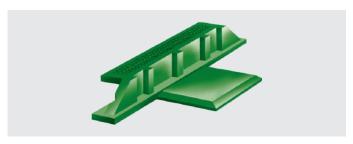




Securbead 3mm

Ref: SCB/3mm Securbead 4mm

Ref: SCB/4mm







Securbead 5mm

Ref: SCB/5mm Securbead 6mm


Ref: SCB/6mm

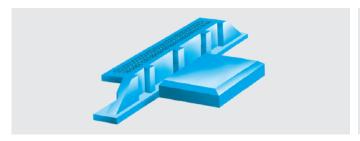




Securbead 6mm Anchoring Groove

Securbead 9mm Anchoring Groove

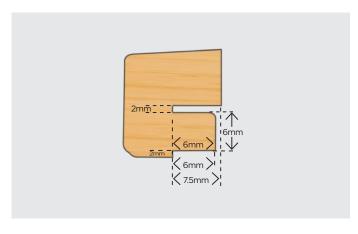

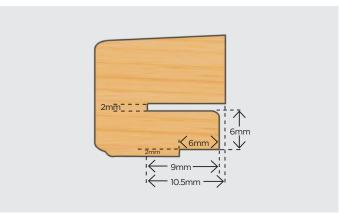

Automatically spaces the double glazed unit with a choice of 1mm to 6mm colour coded packer

Available for 14mm or 20mm double glazed units - please specify

Available with 6mm or 9mm anchoring tongue - please specify


Supplied with stainless steel staples

Optional air stapler available

Lokbead

Glazing without external fixings, no damage to paint coating


A Lokbead B Machined Timber Bead

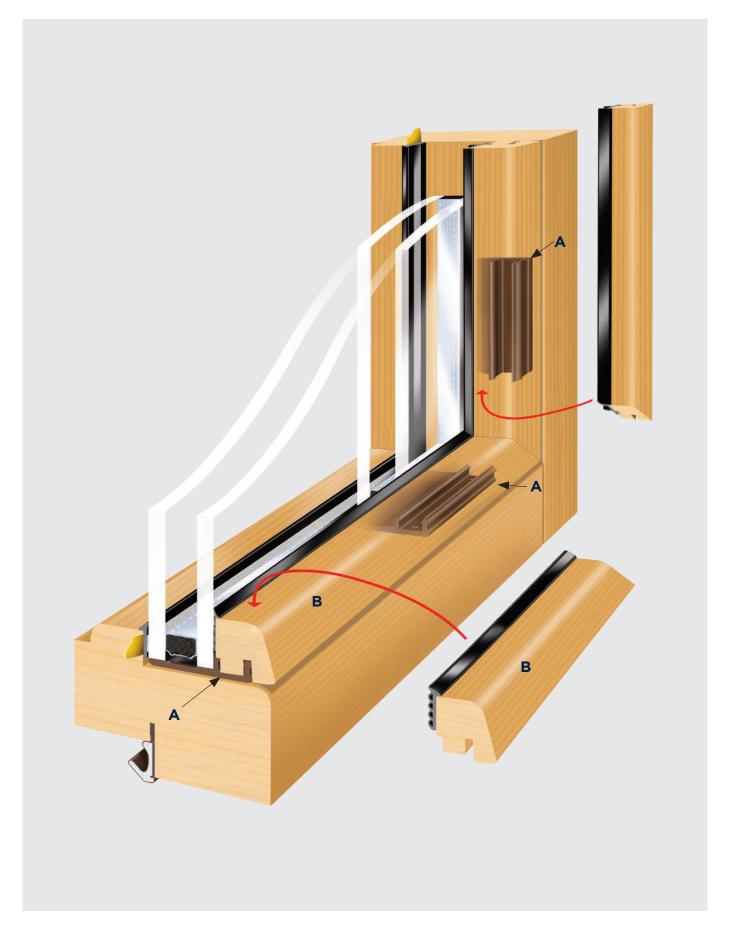

Standard Lokbead

- A Double Sided Security Glazing Tape
- **B** DG units
- C Glazing Gasket RT 2 x 12


Ref: 1.10.0200

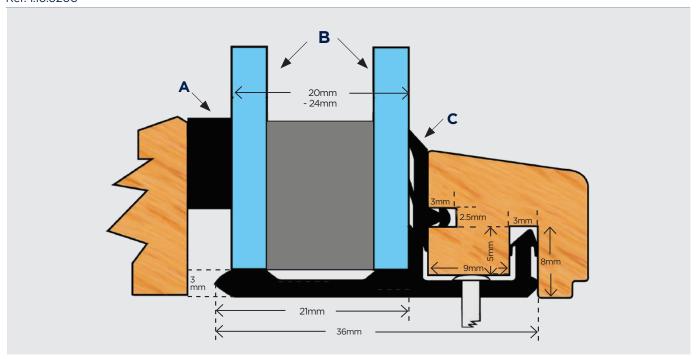

Mini Lokbead

- A Double Sided Security Glazing Tape
- **B** DG units
- ${f C}$ Dry Glaze or Press Fit Glazing Gasket RT 2 x 12

Ref: 1.10.0201

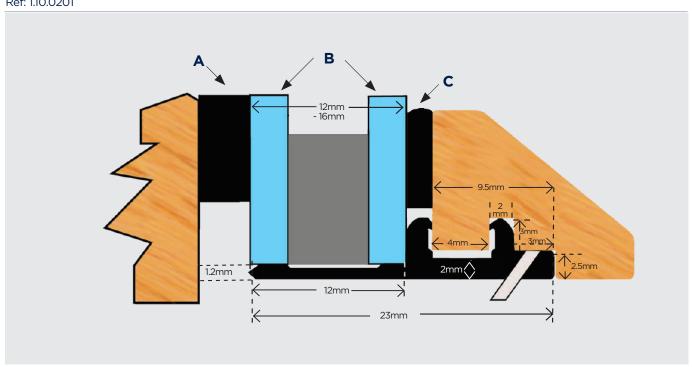

For Ventilated & Drained Bottom Timber Beads

A Timber Bead Glazing Clip


B Machined Timber Bottom Bead



Timber Bead Glazing Clip for Flat Rebates

- A Timber Bead Glazing Clip
- **B** Dry Glazing Gasket
- **c** Security Glazing Tape


Ref: 1.10.0205

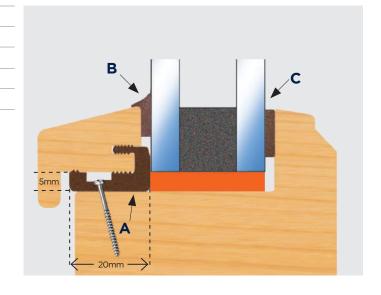


Timber Bead Glazing Clip for Angled Rebates

- A Timber Bead Blazing Clip
- **B** Dry Glazing Gasket
- **C** Security Glazing Tape

Ref: 1.10.0206

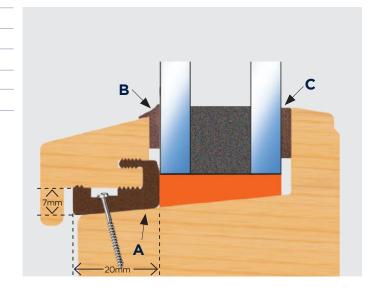

Timber Bead Glazing Clip - Machining Detail

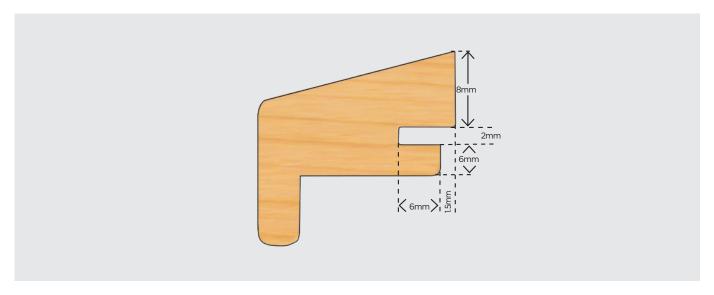

Glazing Accessories

Posilok End Caps


End Caps available for all sizes of PSL & PWT/17


Available in black, brown & white

PSL combined Flat Anchoring & Setting Blocks

Available with 3mm or 6mm platform

To suit 20, 24 & 28mm DGU's

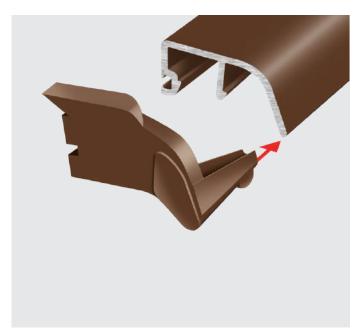



PSL Combined Angled Anchoring & Setting Blocks

To suit 20mm, 24mm, & 28mm DGU's


PWT & PSL Fixing & Spacer Blocks

Allows additional clearance & drainage

A 3mm flat spacer for PWT

B 5mm flat spacer for PSL







Flat Setting Blocks

Angled Setting Blocks

Available to suit 20 DGU's

Available to suit 14, 20 & 28 DGU's

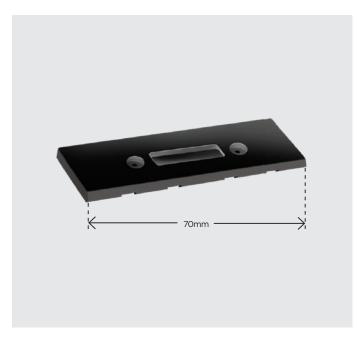



Tapered Wedge Packers for sides & top

Available to suit 14, 20, 24 and 28 DGU's

Elast-O-Sealant

All weather sealant

Can be applied to wet surfaces

Available in black, brown, white, grey & clear

Ref: 1.18.0400





Intumescent Fire & Smoke Seals for Fire Door Assemblies



Specification

A graphite based intumescent fireseal contained within a PVC carrier.

The seals are self-adhesive & are rebated into either the doorframe or the door edge.

In the event of a fire the seal expands to many times its original volume & seals the gap around the door to provide an effective barrier against the passage of fire, smoke & hot gases.

Exitex Intumescent Fireseals are available with or without a cold smoke seal in the form of a grey nylon pile or a black neoprene rubber draught seal.

Exitex smoke seals provide a permanent barrier to smoke – particularly important as smoke fumes travel faster & further than the fire itself.

They also have acoustic & thermal applications.

Certifire Approved



Tested for 30 minutes with 10mm & 15mm to BS 476 part 22 & 31.1.

Tested for 60 minutes with 20mm, 25mm & 30mm to BS 476 part 22 & 31.1.

Smoke seals tested to EN1634-3.

Tested to 100,000 open / close cycles.

To seal the bottom of the door please refer to our range of weatherbars in our Weatherbars, Door Surrounds & DIY Products brochure.


Fire only





Product Ref	Profile Size	Type	Fire Rating	Length	Colours	
Ref: 1.31.0001	10mm x 4mm	Fire Only	30mins	2.1m	White/Brown	
Ref: 1.31.0002	15mm x 4mm	Fire Only	30mins	2.1m	White/Brown	
Ref: 1.31.0003	20mm x 4mm	Fire Only	60mins	2.1m	White/Brown	
Ref: 1.31.0004	25mm x 4mm	Fire Only	60mins	2.1m	White/Brown	
Ref: 1.31.0005	30mm x 4mm	Fire Only	60mins	2.1m	White/Brown	

Fire & Smoke Seal

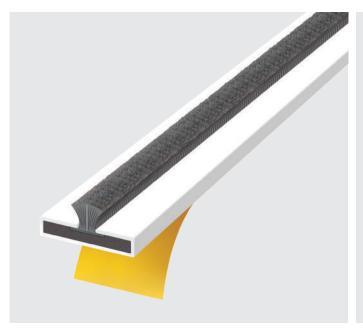




Product Ref	Profile Size	Type	Fire Rating	Length	Colours	
Ref: 1.31.0101	10mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown	
Ref: 1.31.0102	15mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown	
Ref: 1.31.0103	20mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown	
Ref: 1.31.0104	25mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown	
Ref: 1.31.0105	30mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown	

Intumescent Seals

Fire & Smoke with Single Flipper






Product Ref	Profile Size	Type	Fire Rating	Length	Colours
Ref: 1.31.0021	10mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0022	15mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0023	20mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0024	25mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0025	30mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown

Fire & Smoke with Double Flipper





Product Ref	Profile Size	Type	Fire Rating	Length	Colours
Ref: 1.31.0011	10mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0012	15mm x 4mm	Fire & Smoke	30mins	2.1m	White/Brown
Ref: 1.31.0013	20mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0014	25mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown
Ref: 1.31.0015	30mm x 4mm	Fire & Smoke	60mins	2.1m	White/Brown

Automatic Door Bottom Seals

Concealex A1502

Inward & Outward


Ref: 1.01.0100













Concealex A1001

Inward & Outward

Ref: 1.01.0101









Automatic Door Bottom Seal

Can be trimmed up to 100mm

In sizes 0.8m, 0.9m, 1m, 1.1m, 1.2m, 1.3m & 1.4m

Acoustic rating - 41db


Acoustic rating - 45db


Tested to DIN 18095-2 smoke control doors

Tested to DIN 4102-5 fire control doors

Can be trimmed up to 100mm

In sizes 0.8m, 0.9m, 1m, 1.1m, 1.2m, 1.3m & 1.4m



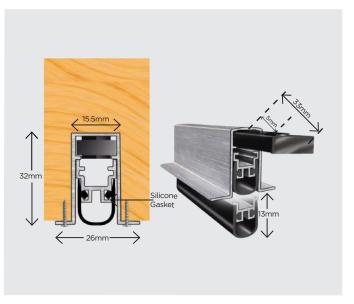

Brochure Range

- _ Acoustic Seals Range
- _ Capex & Cresfinex
- _ Fire Protection
- _ Weatherbars, Door Surrounds & DIY Products

Exitex Limited

Dundalk, Ireland, A91 HK29

+353 42 937 1244 info@exitex.com

exitex.com

